

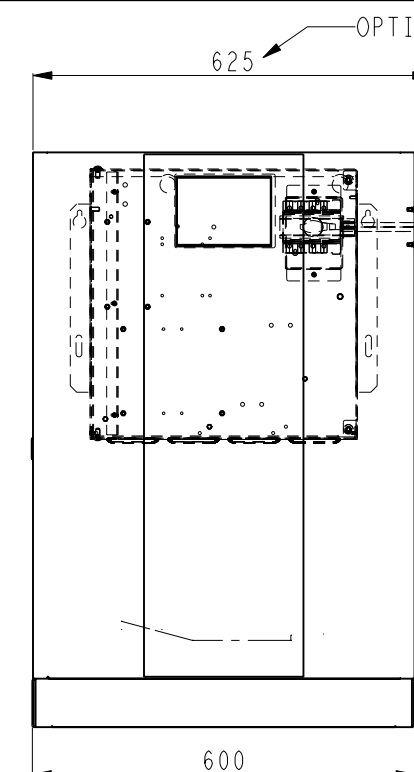
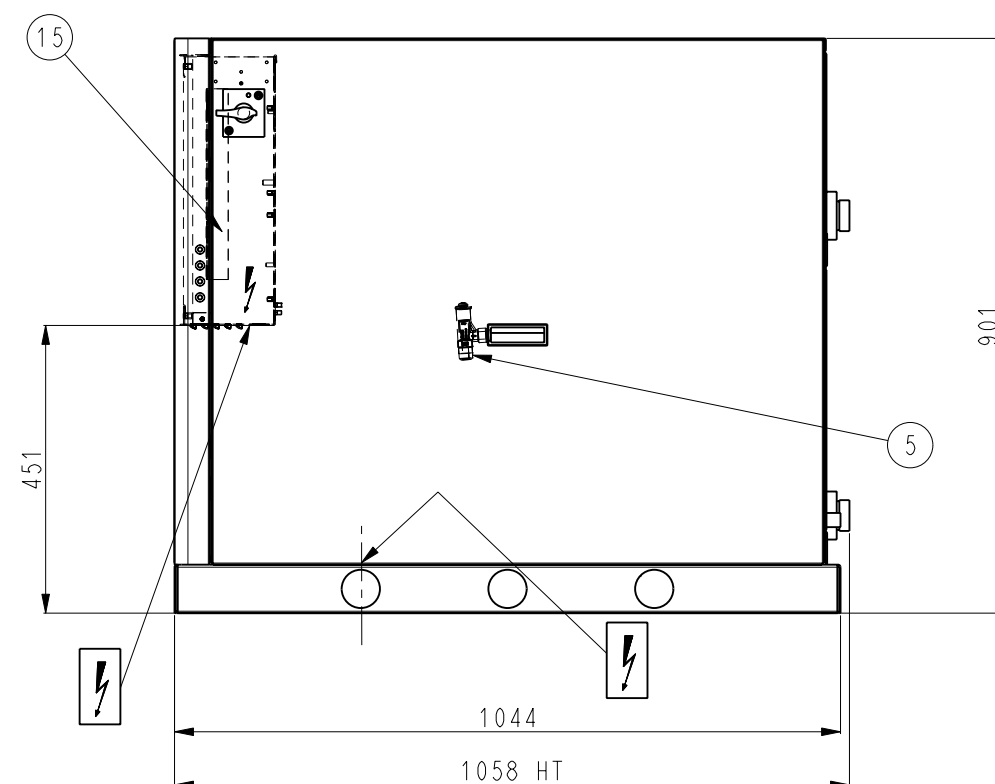
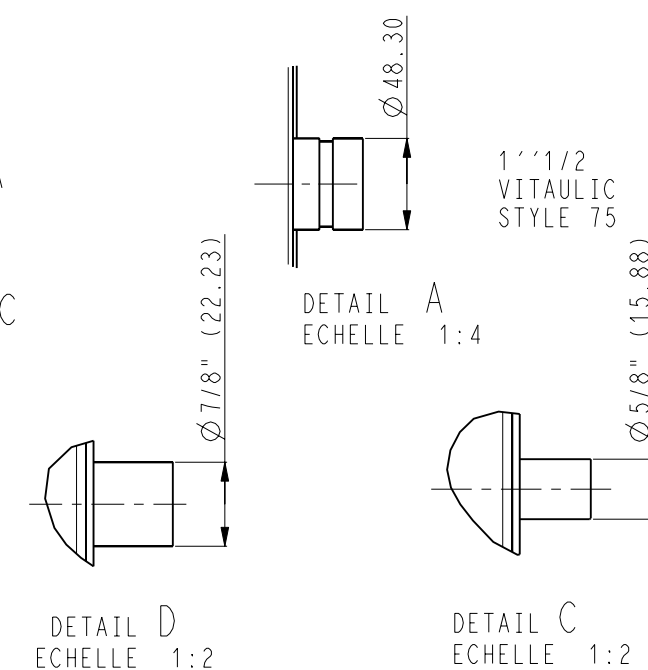






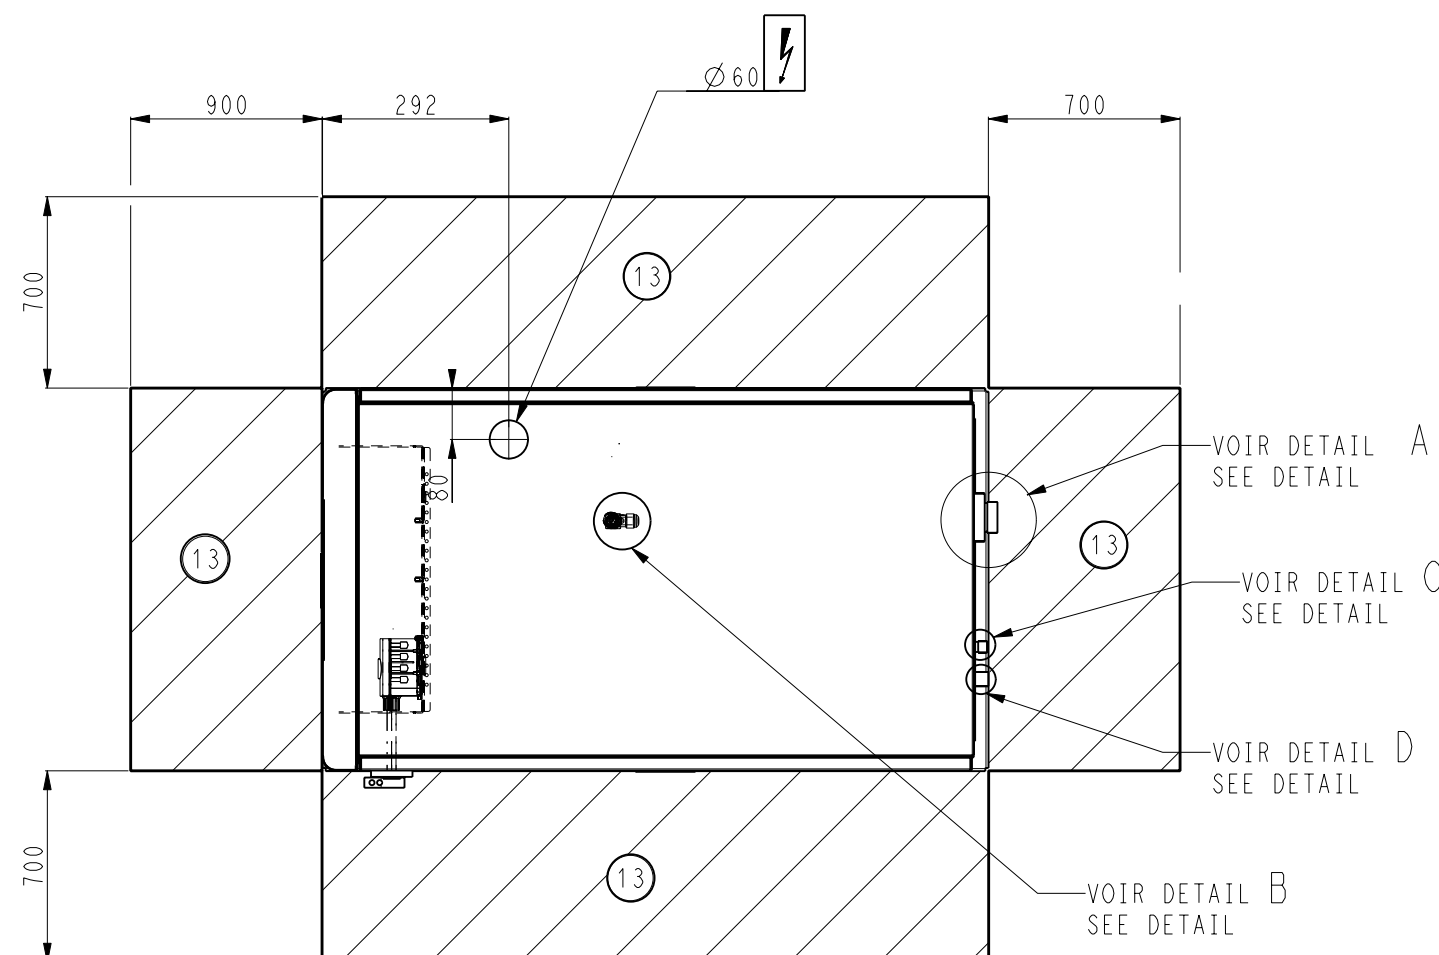


For refrigerant connection
caps must be removed

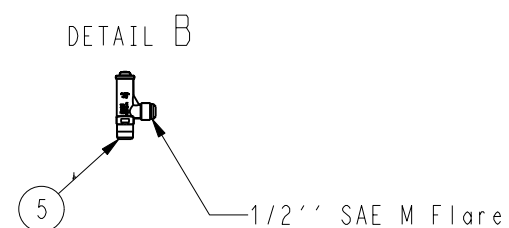


TOLERANCE			DATE	Feuille Sheet 1/5
±10	30WGA 020 - 045		18-Feb-2016	Indice
		00DCG000058500		B






OPT 273

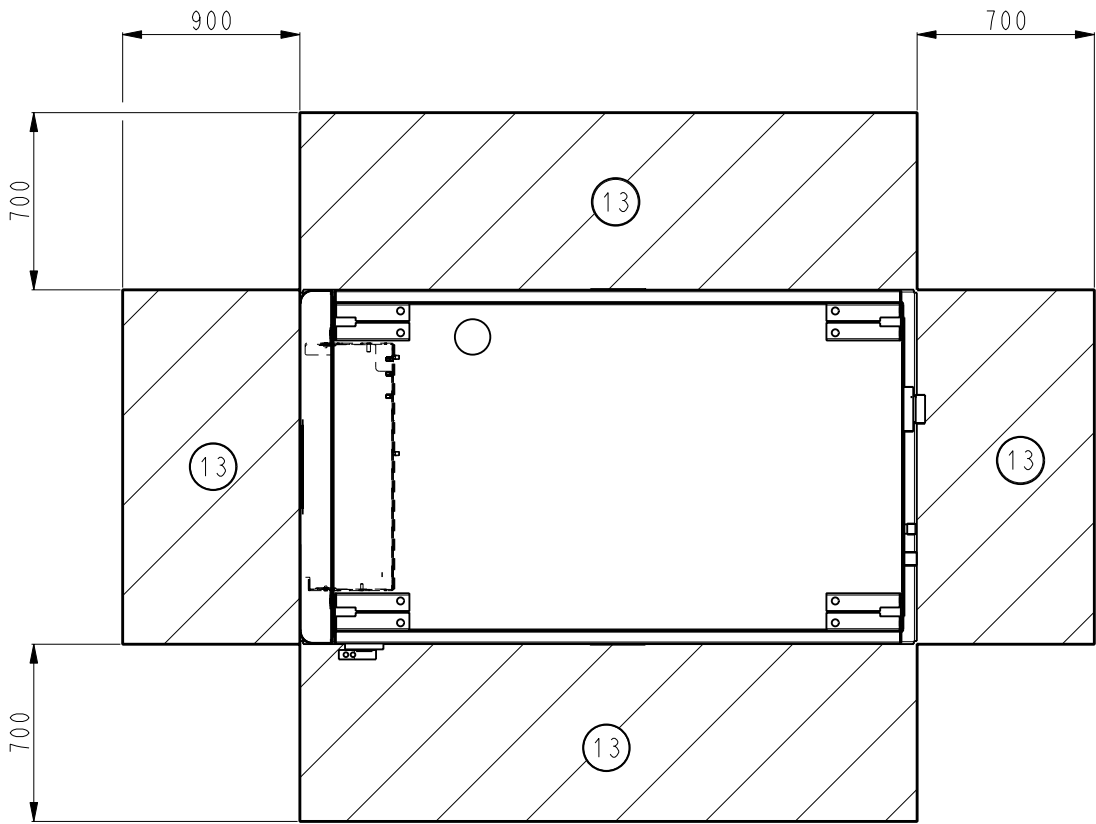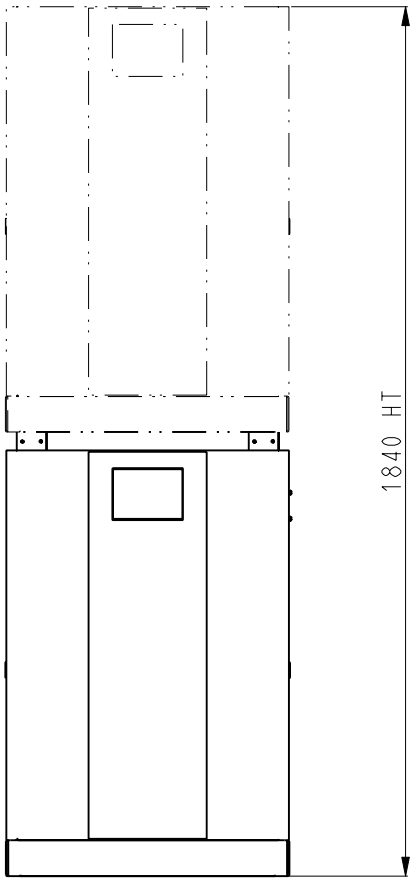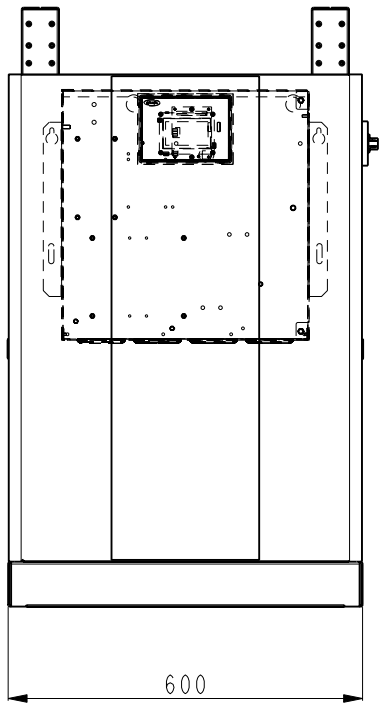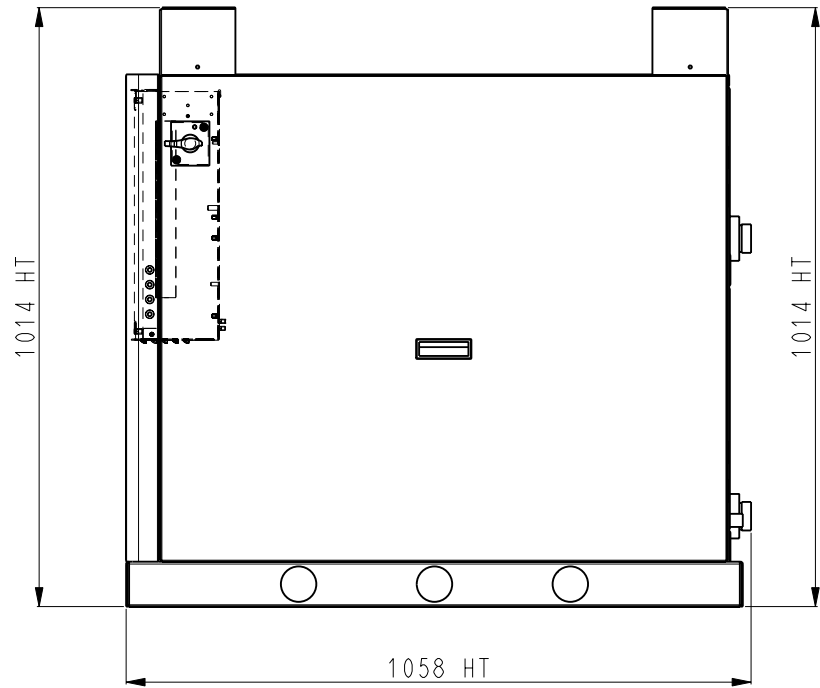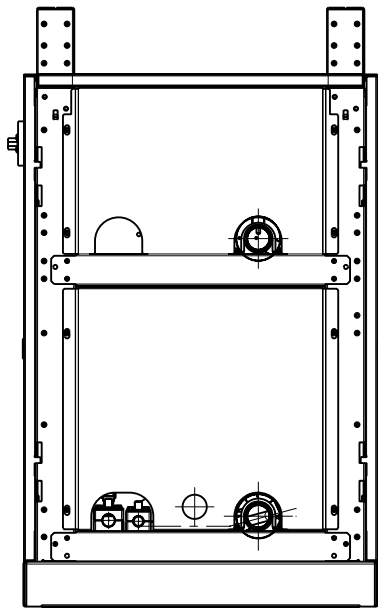

NOTE:
-RACCORDS HYDRAULIQUE ET ELECTRIQUE
IDENTIQUES A L'UNITE SANS OPTION.
-HYDRAULIC AND ELECTRICAL CONNECTIONS
ARE IDENTICAL TO STANDARD UNIT.

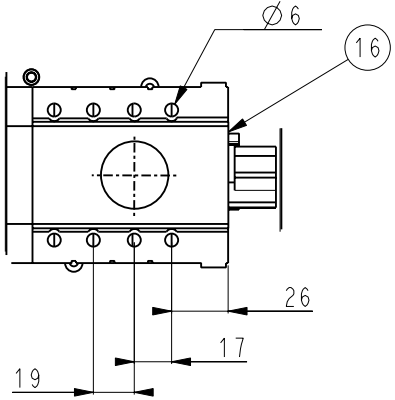

DETAIL B
ECHELLE 23:80

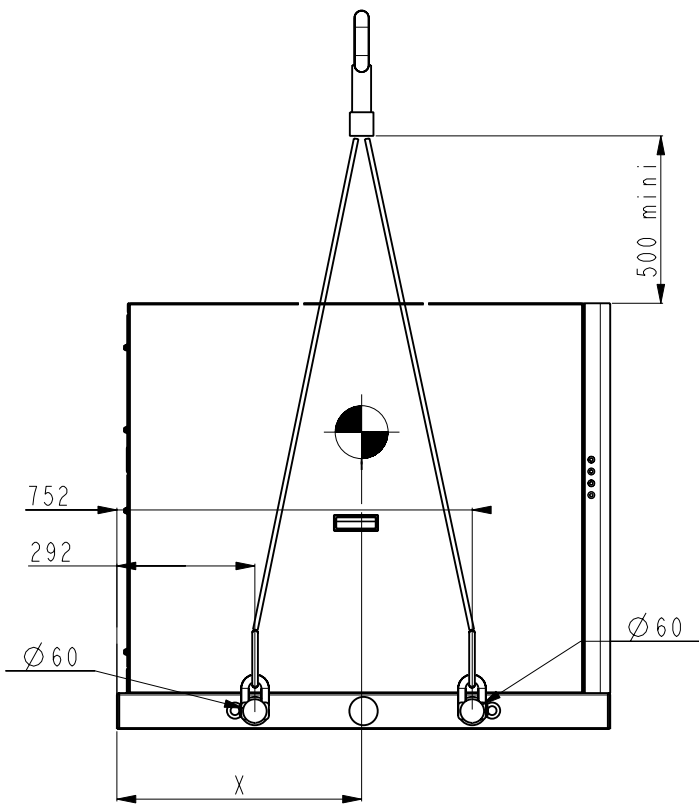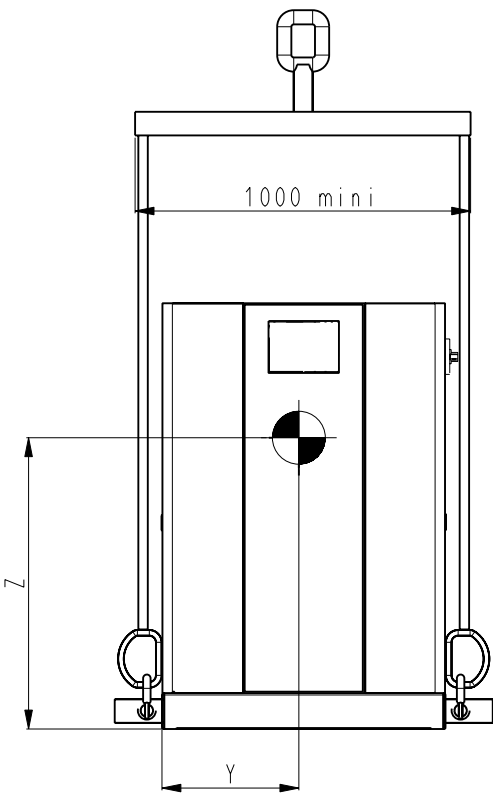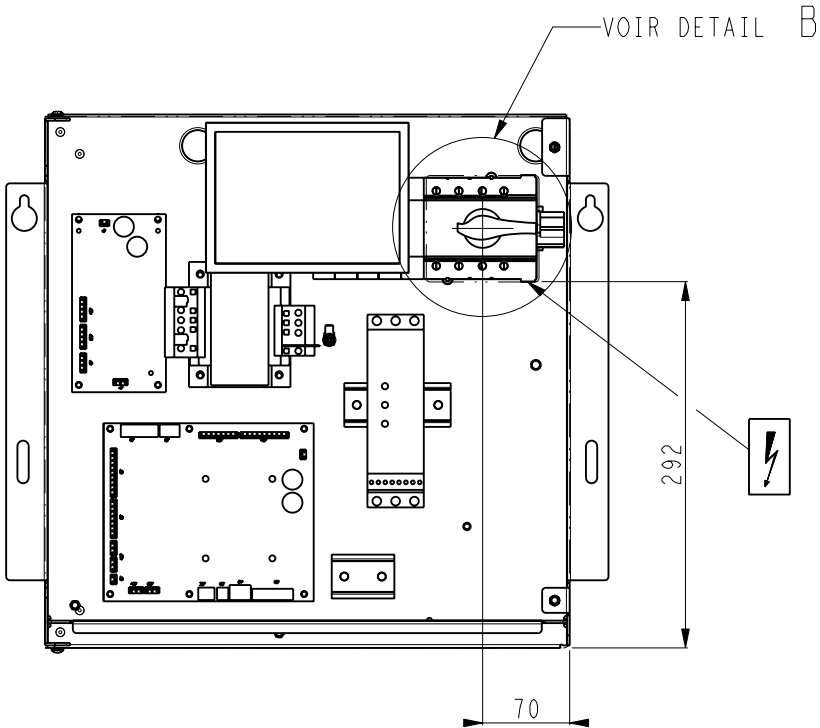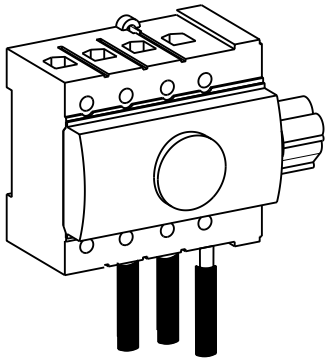

SIZE	OPTION				POIDS / WEIGHT ±5%
		X mm	Y mm	Z mm	PT Kg
20		497	329	360	164
25		492	331	377	171
30		492	331	377	171
35		492	332	377	177
40		484	335	378	180
45		486	317	363	185
20	258	497	329	360	171
25		492	331	377	178
30		492	331	377	178
35		492	332	377	184
40		484	335	378	187
45		486	317	363	192

