

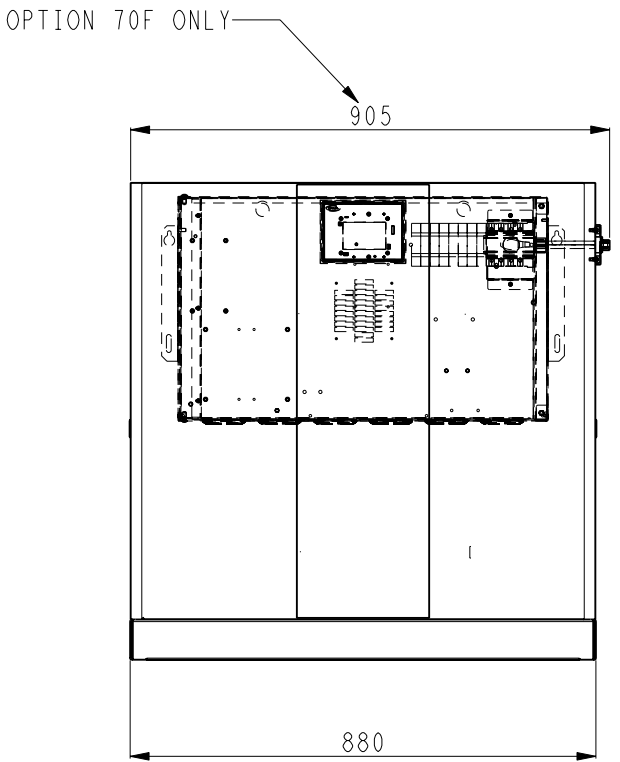
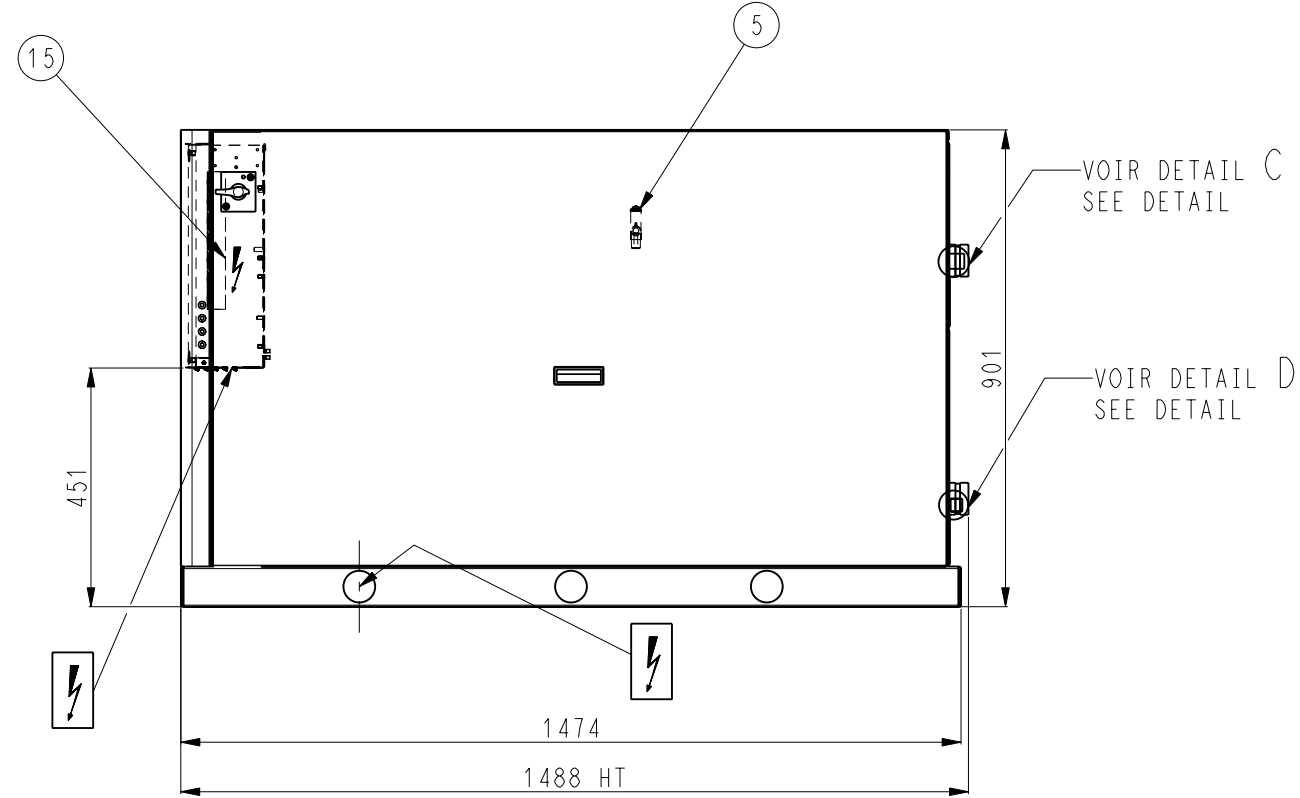
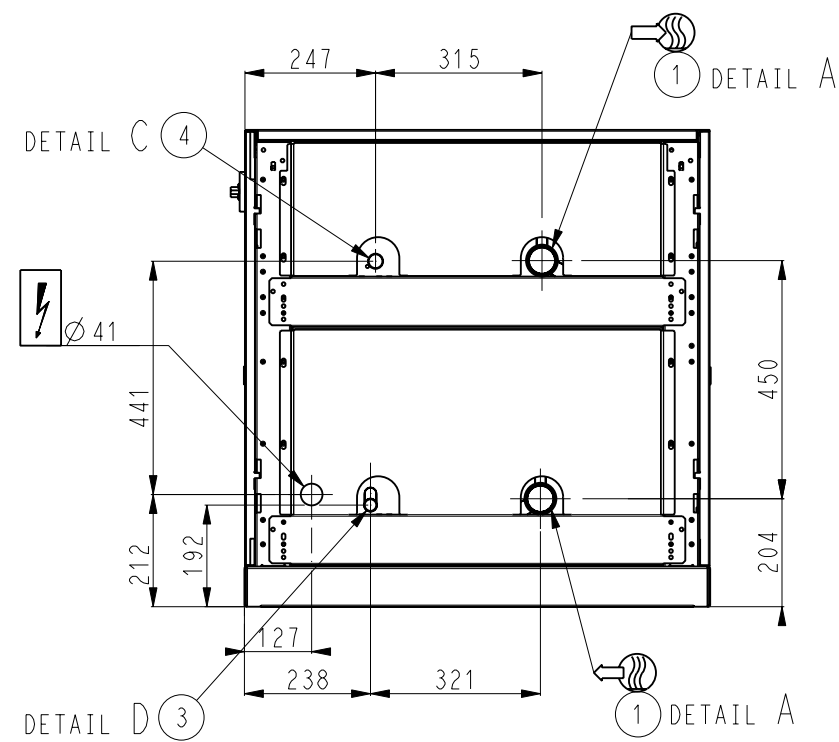
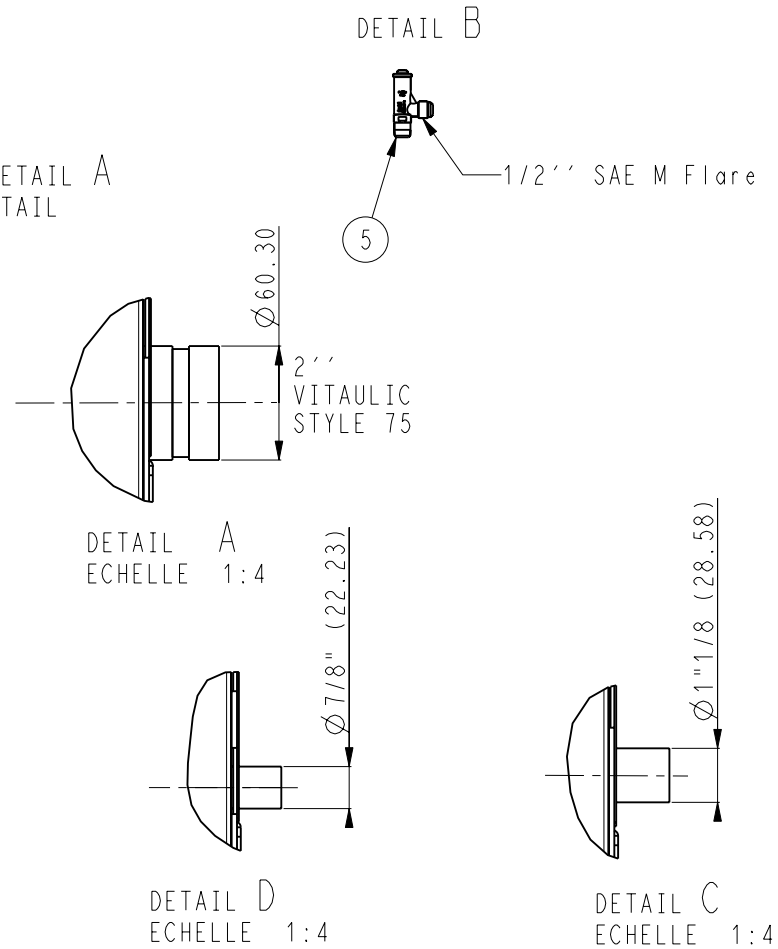





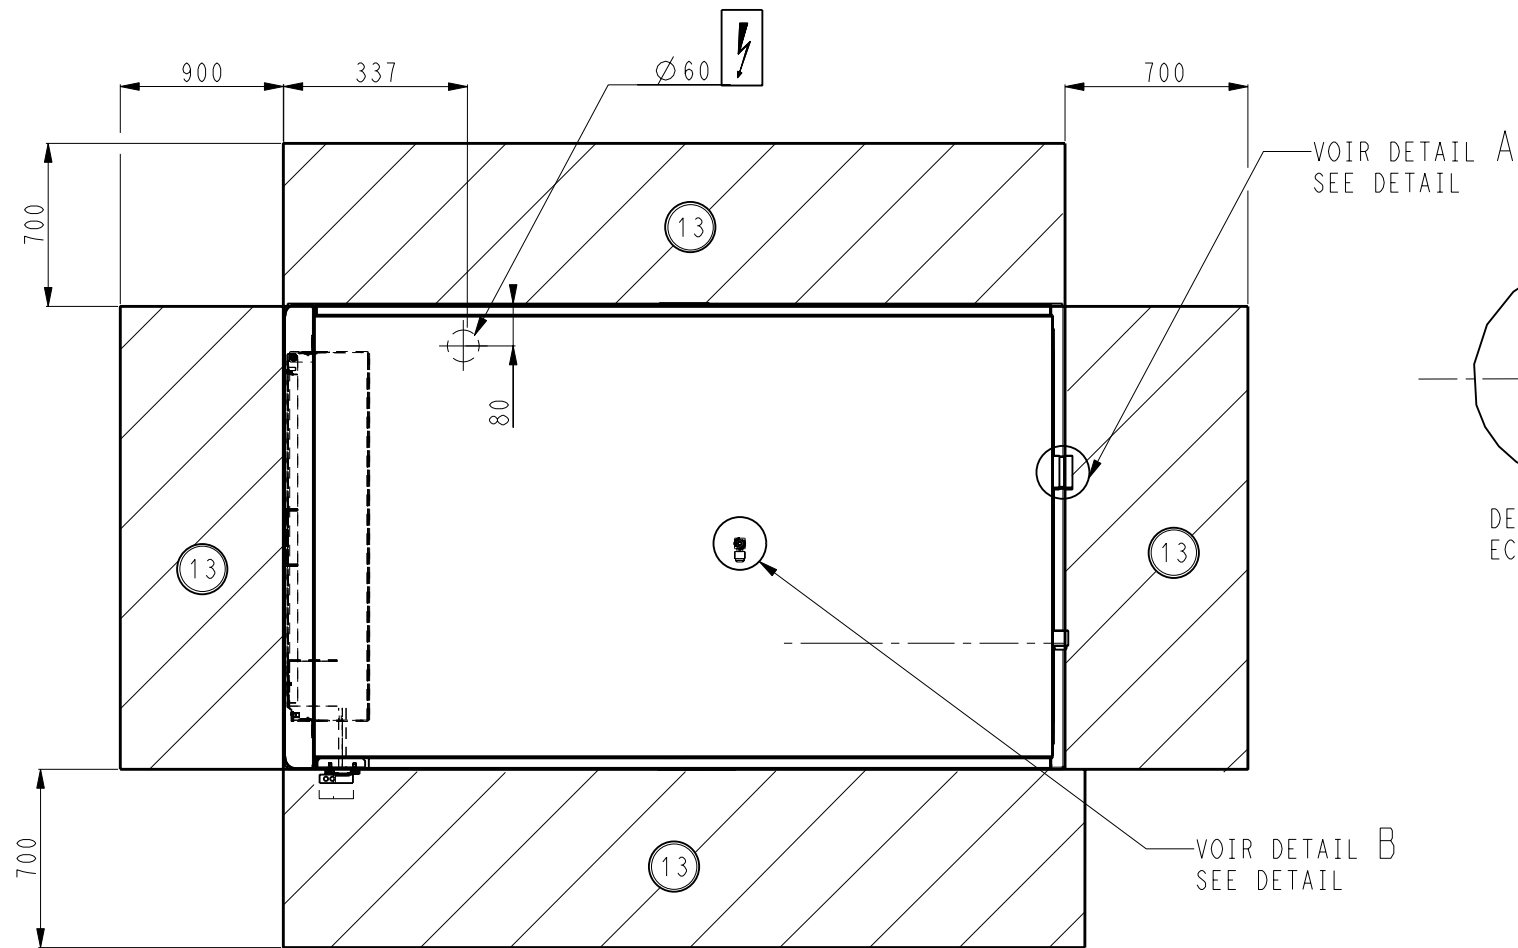


NOTE / NOTE:
Pour la connexion refrigerant
les bouchons doivent être enlevés
For refrigerant connection
caps must be removed


Ø A	
OPTION 264	(1) A VISSER (GAZ CONIQUE) Ø 60.3 BSPT (TAPER THREADS)
OPTION 265	(2)
OPTION 266	(1) 2" ACIER A SOUDER Ø 60.3
OPTION 267	(2) STEEL FOR WELDING

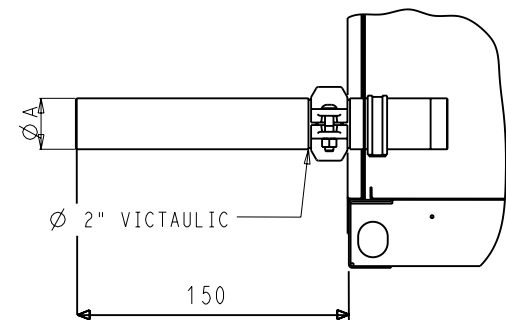

OPT 273

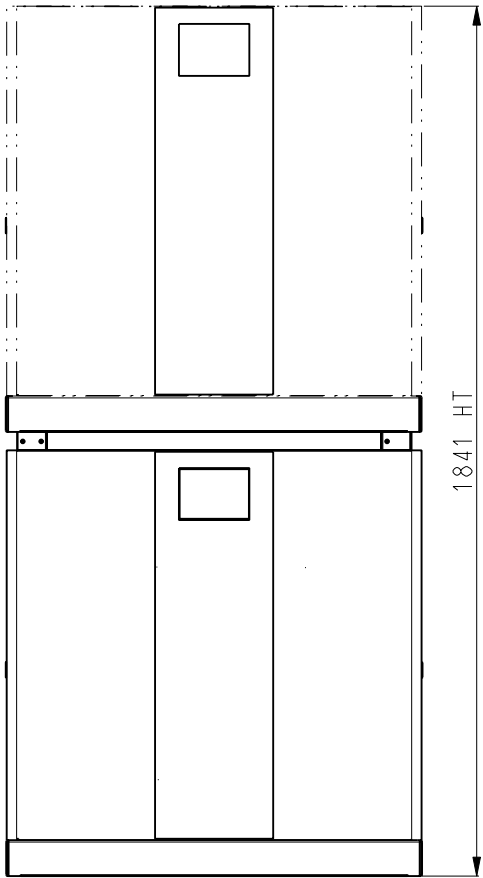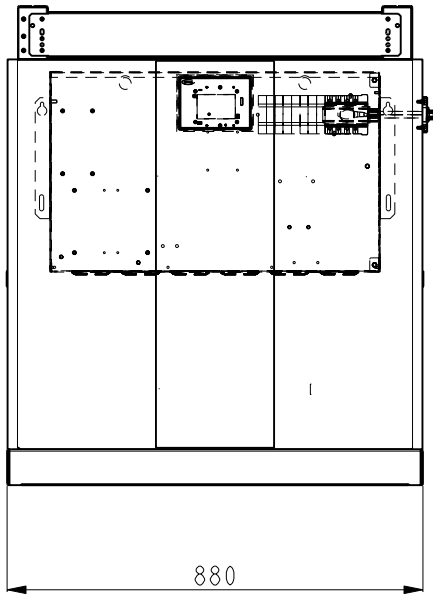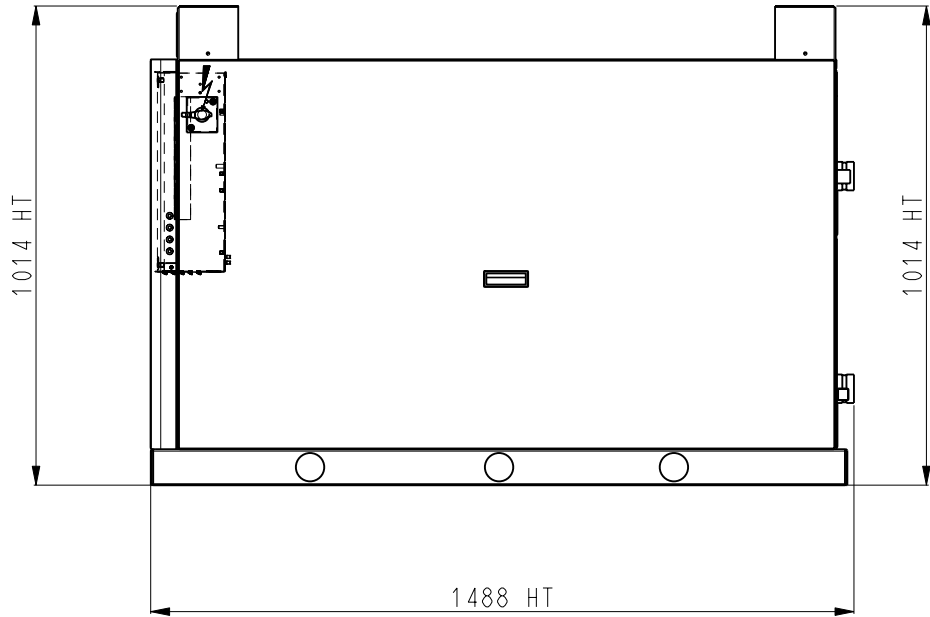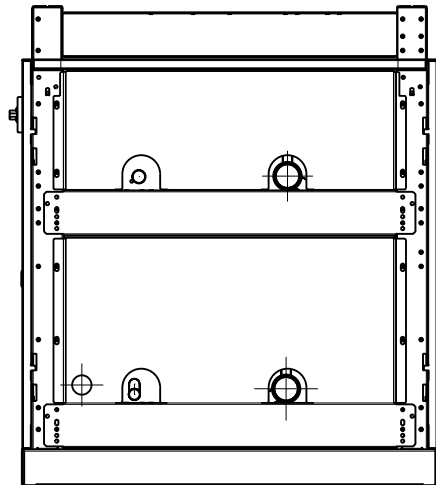

NOTE:
-RACCORDS HYDRAULIQUE ET ELECTRIQUE
IDENTIQUES A L'UNITE SANS OPTION.
-HYDRAULIC AND ELECTRICAL CONNECTIONS
ARE IDENTICAL TO STANDARD UNIT.

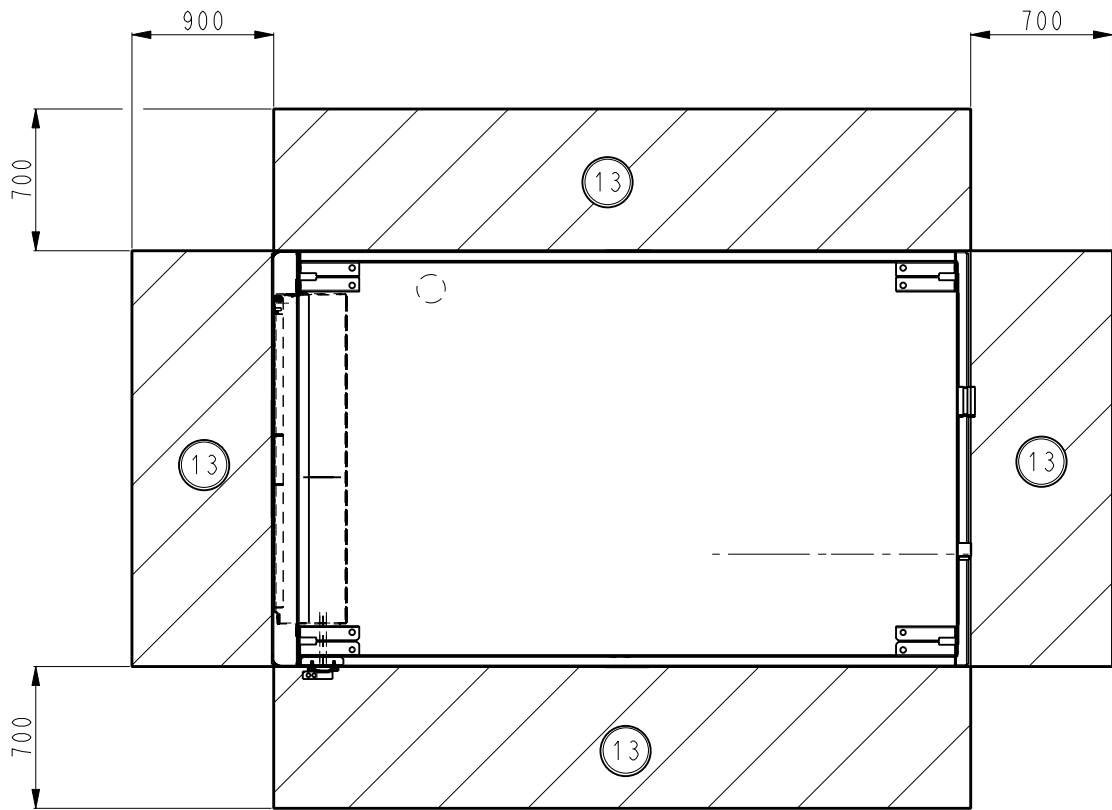

SIZE	OPTION				POIDS / WEIGHT ±5%
		X mm	Y mm	Z mm	PT Kg
50		685	442	385	321
60		687	440	385	324
70		685	440	386	332
80		682	440	387	339
90		688	438	386	354
50	258	685	442	385	334
60		687	440	385	337
70		685	440	386	345
80		682	440	387	352
90		688	438	386	367

