

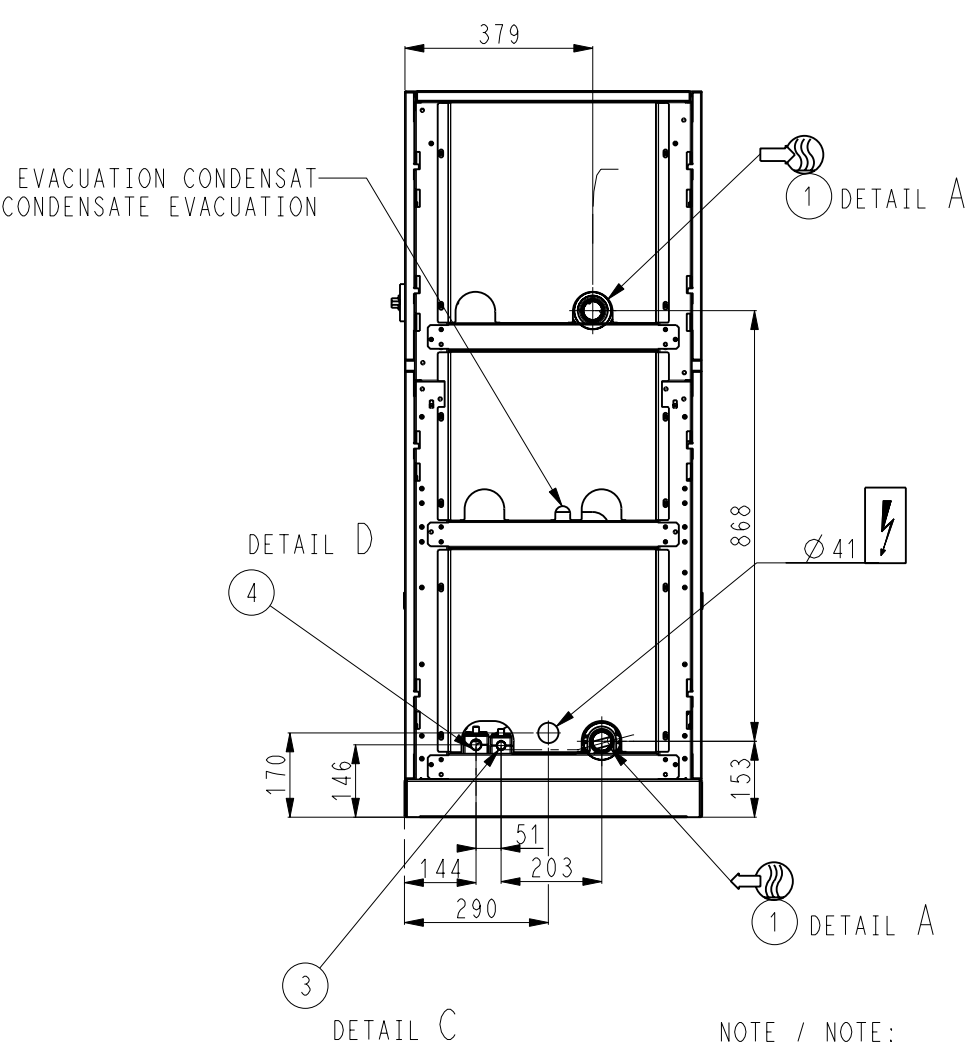
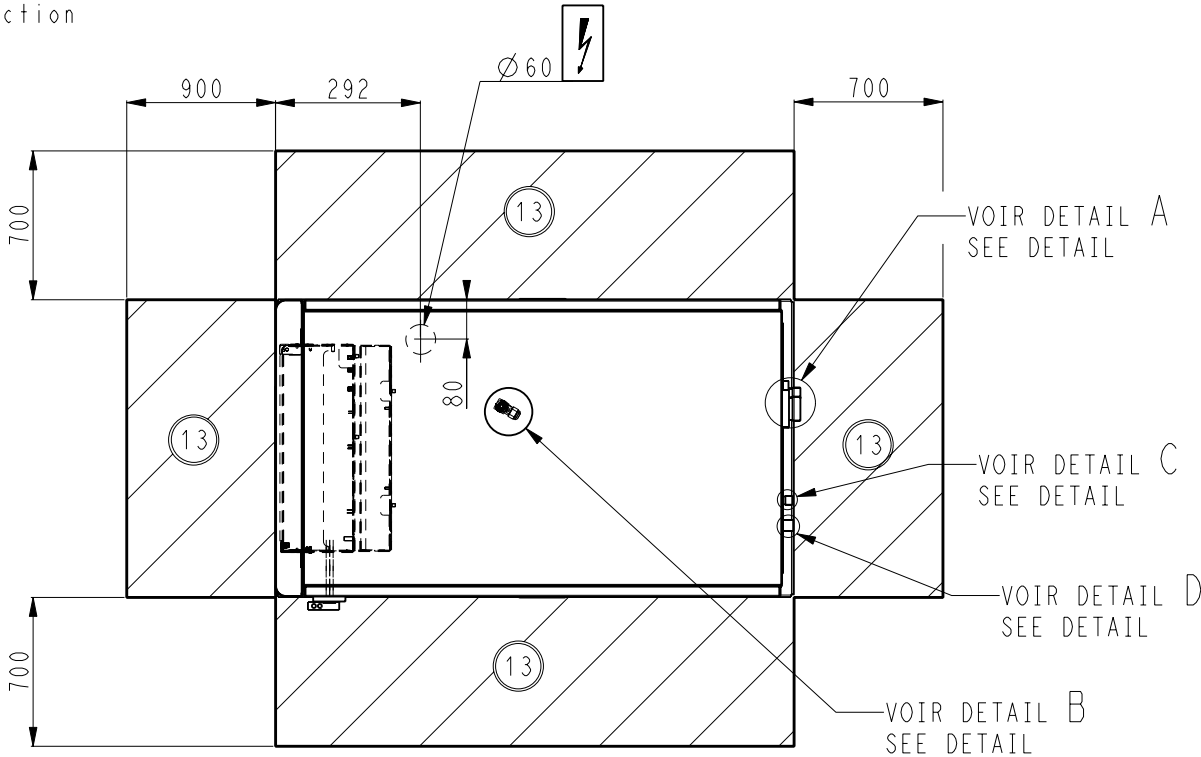
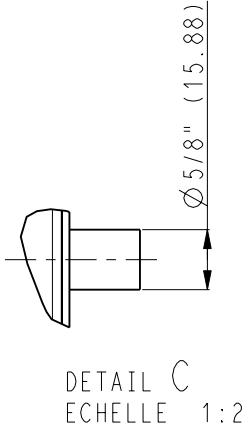


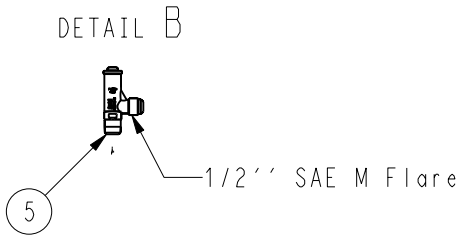


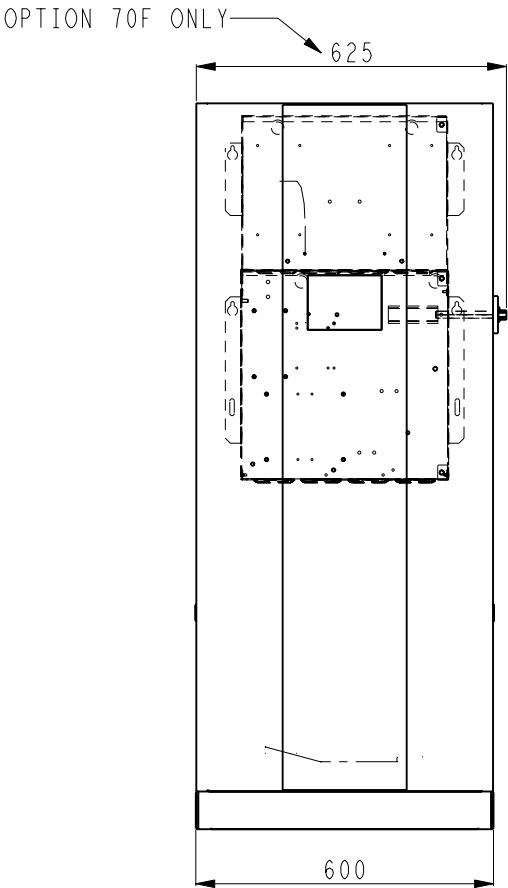





NOTE / NOTE:
Pour la connexion refrigerant
les bouchons doivent être enlevés

For refrigerant connection
caps must be removed

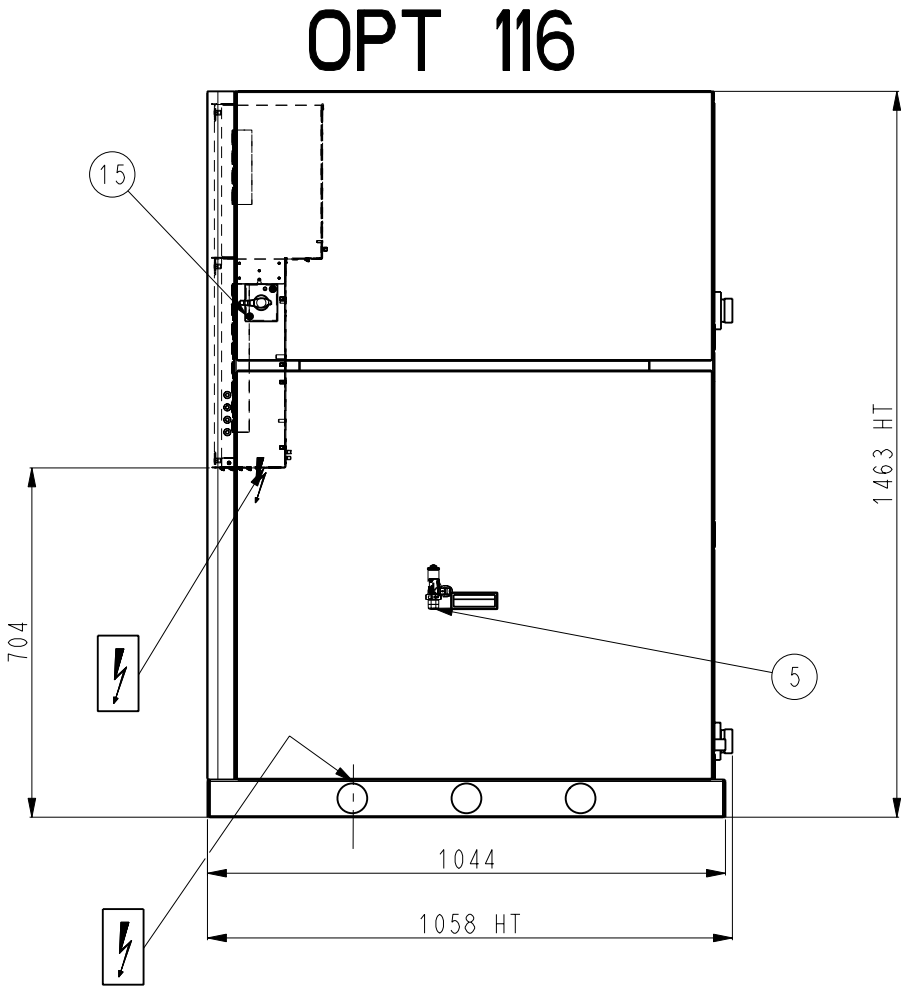

	Ø A	
OPTION 264	1	A VISSER 1"1/2 (GAZ CONIQUE) Ø 48.3 BSPT (TAPER THREADS)
OPTION 265	2	
OPTION 266	1	1"1/2 ACIER A SOUDER Ø 48.3
OPTION 267	2	STEEL FOR WELDING

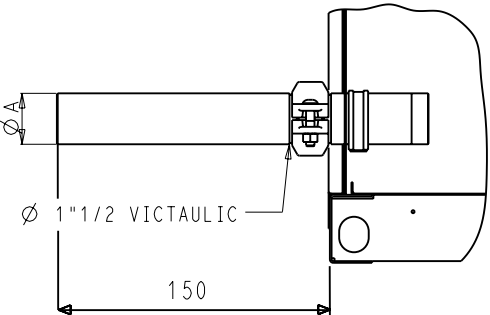

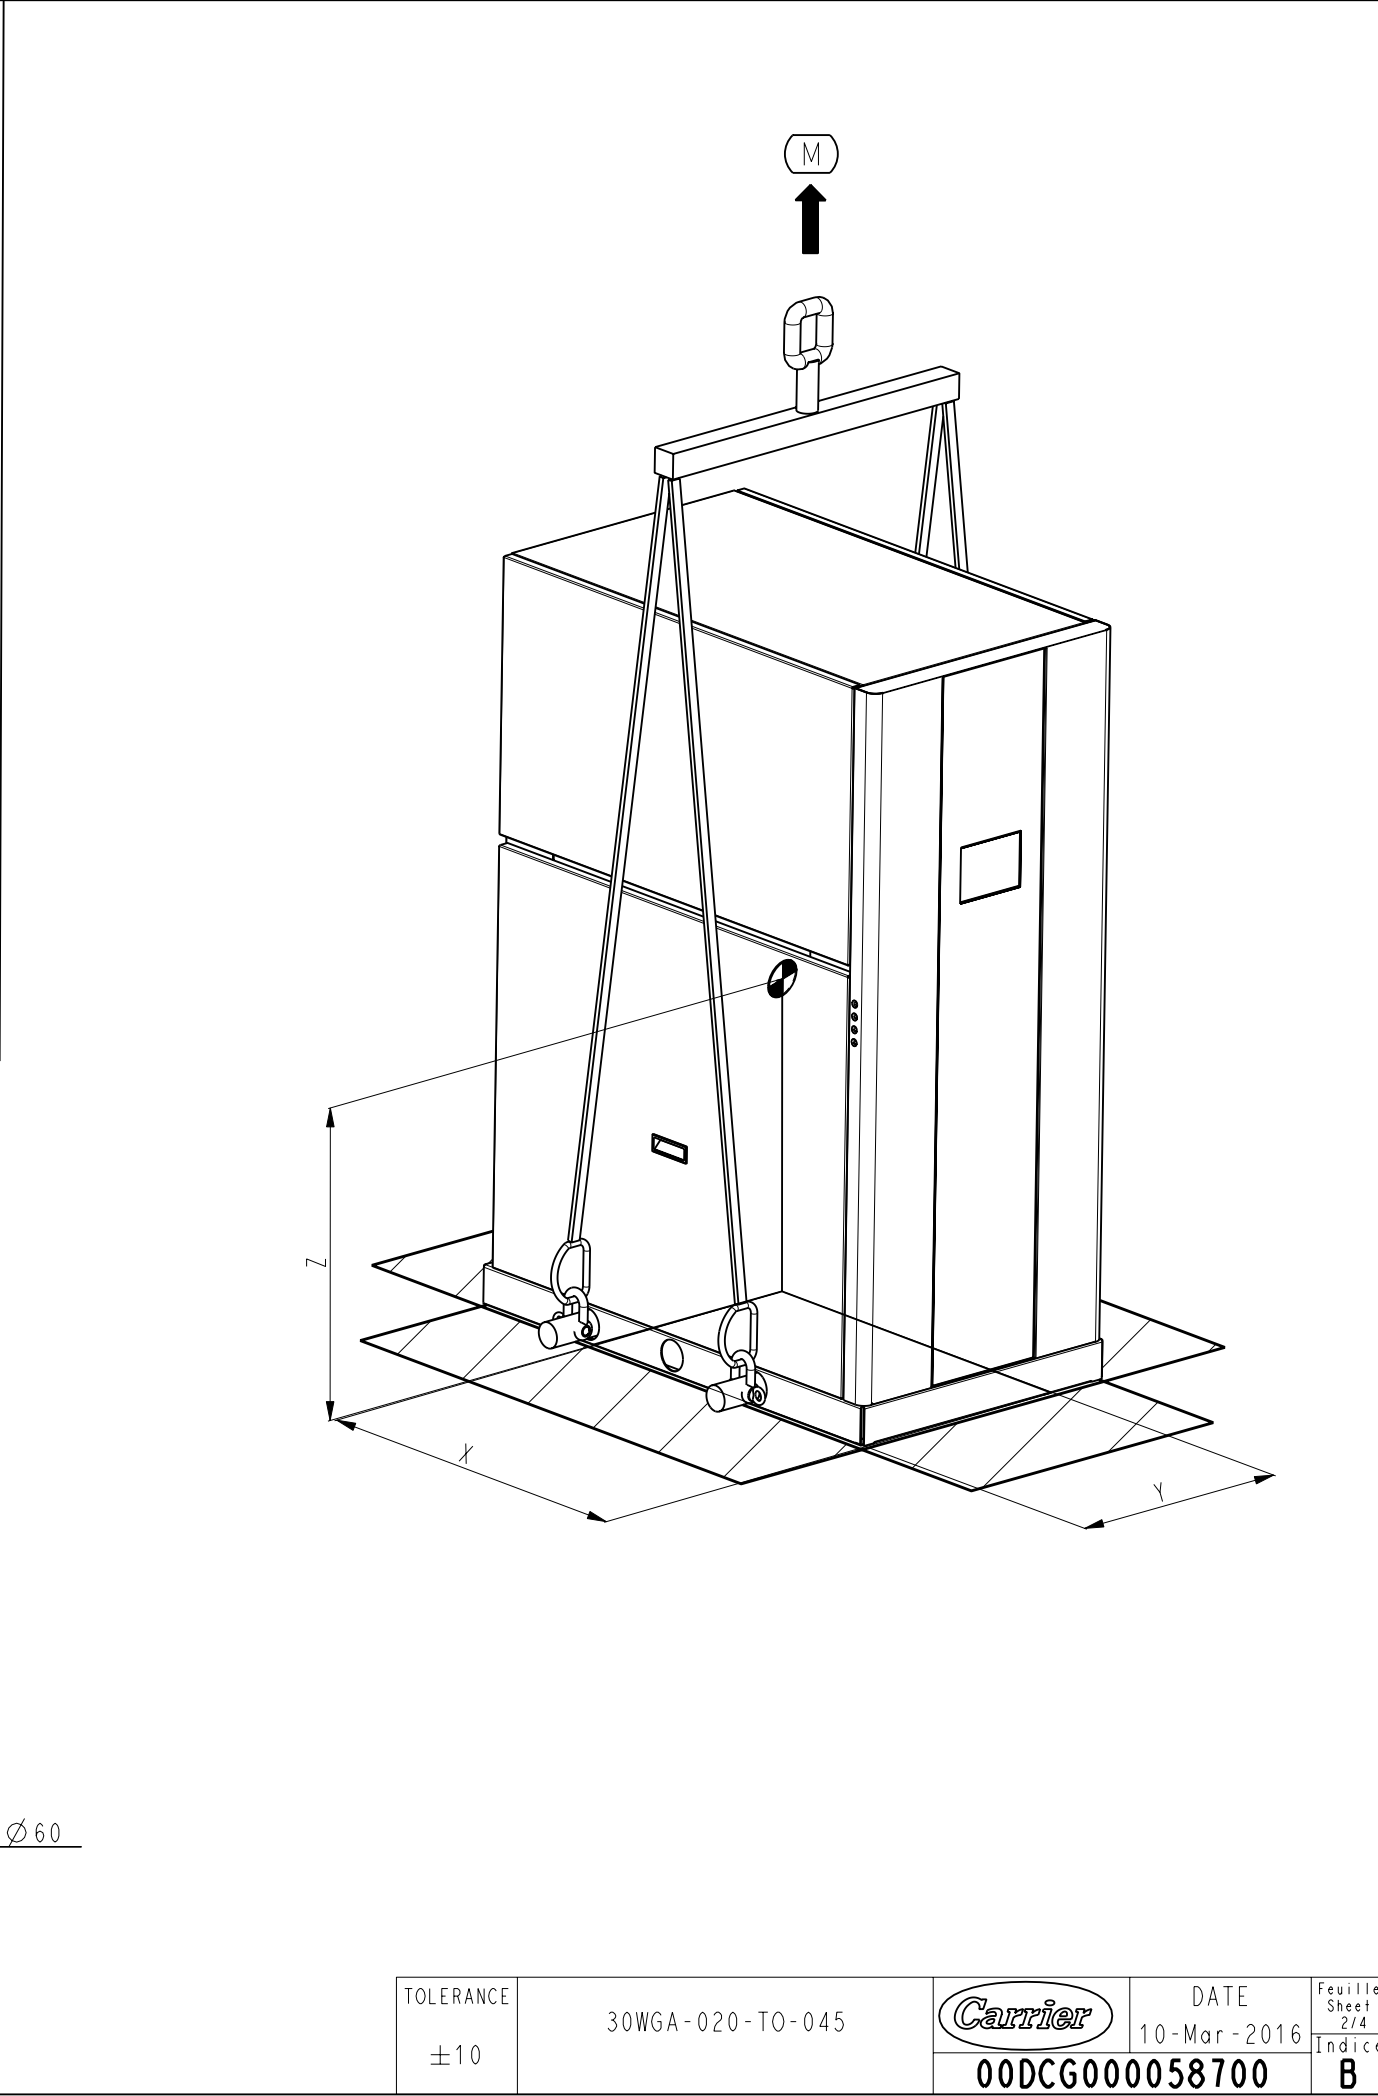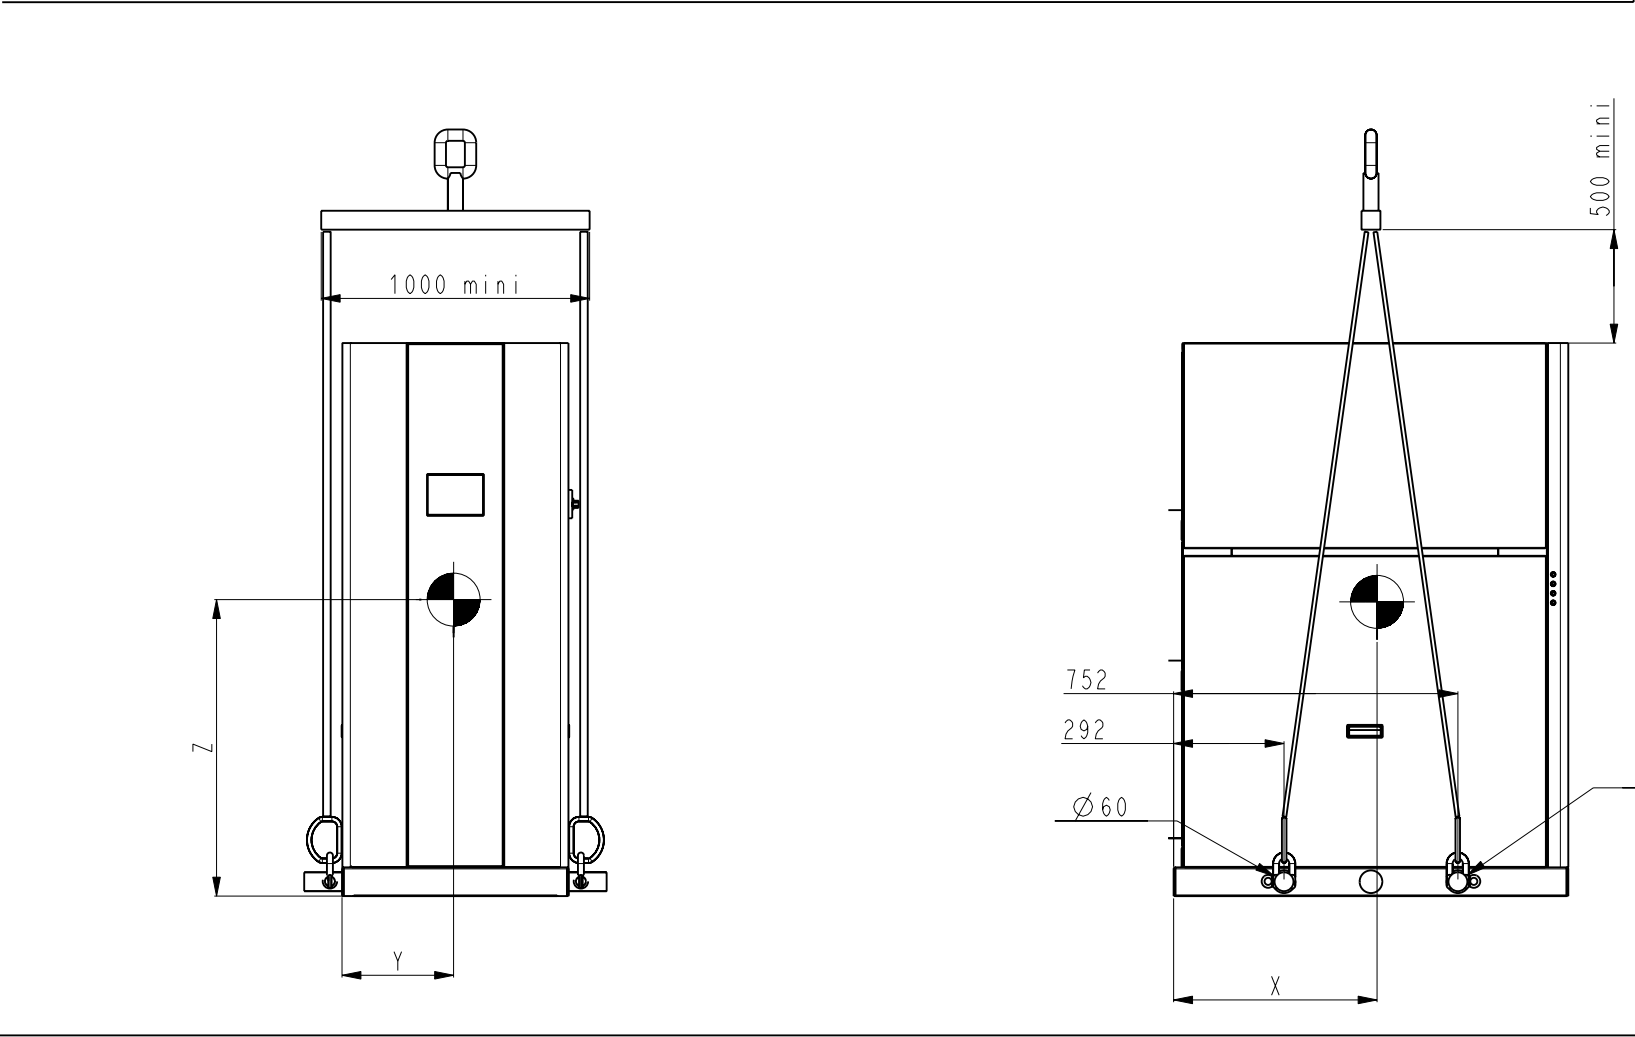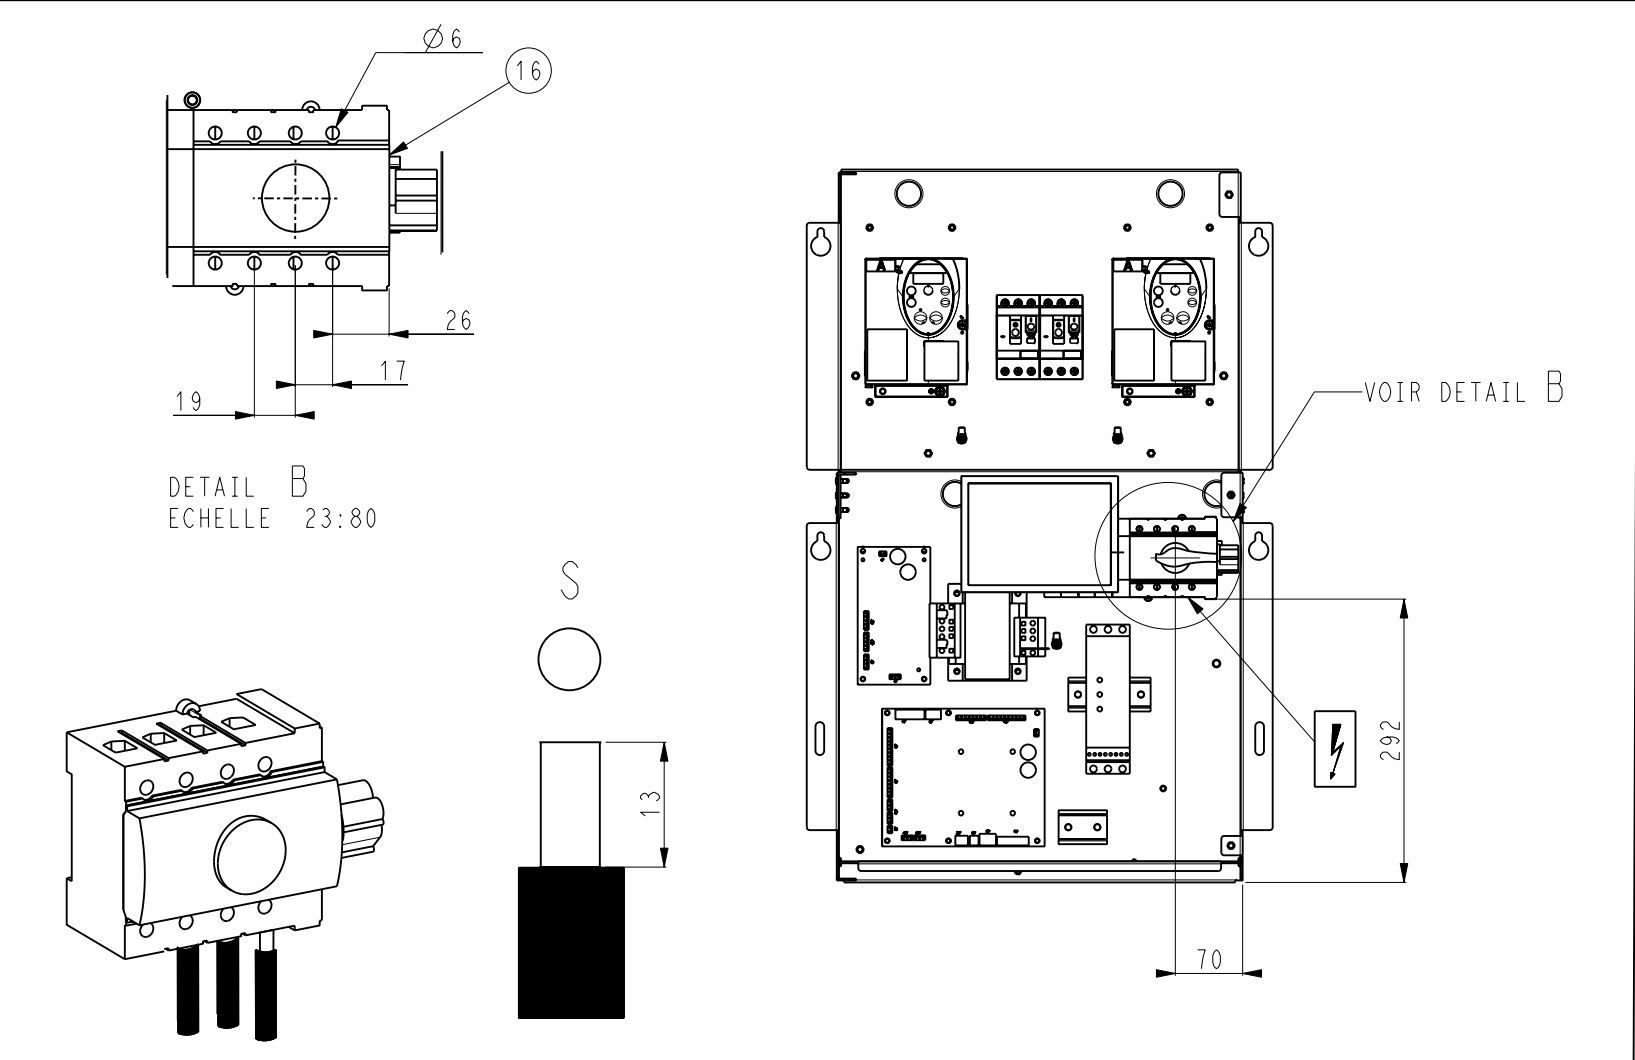

SIZE	OPTION				POIDS / WEIGHT +/- 5%
		X mm	Y mm	Z mm	PT Kg
20	116T	495	311	582	242
25		492	314	580	250
30		492	314	580	250
35		492	315	580	255
40		488	317	578	259
45		488	317	575	264
20	116V	494	310	587	250
25		491	313	585	258
30		491	313	585	258
35		490	314	584	263
40		486	316	582	266
45		486	316	579	271
20	116T+258	495	311	582	250
25		492	314	580	258
30		492	314	580	258
35		492	315	580	263
40		488	317	578	267
45		488	317	575	272
20	116V+258	494	310	587	258
25		491	313	585	266
30		491	313	585	266
35		490	314	584	271
40		486	316	582	274
45		486	316	579	279

