

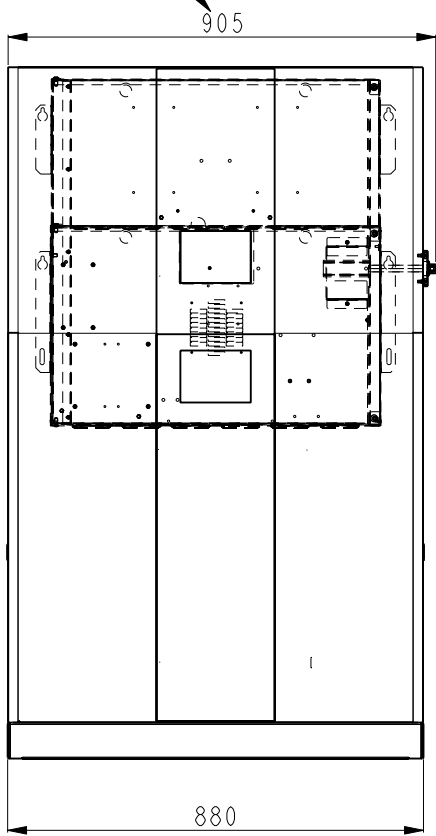
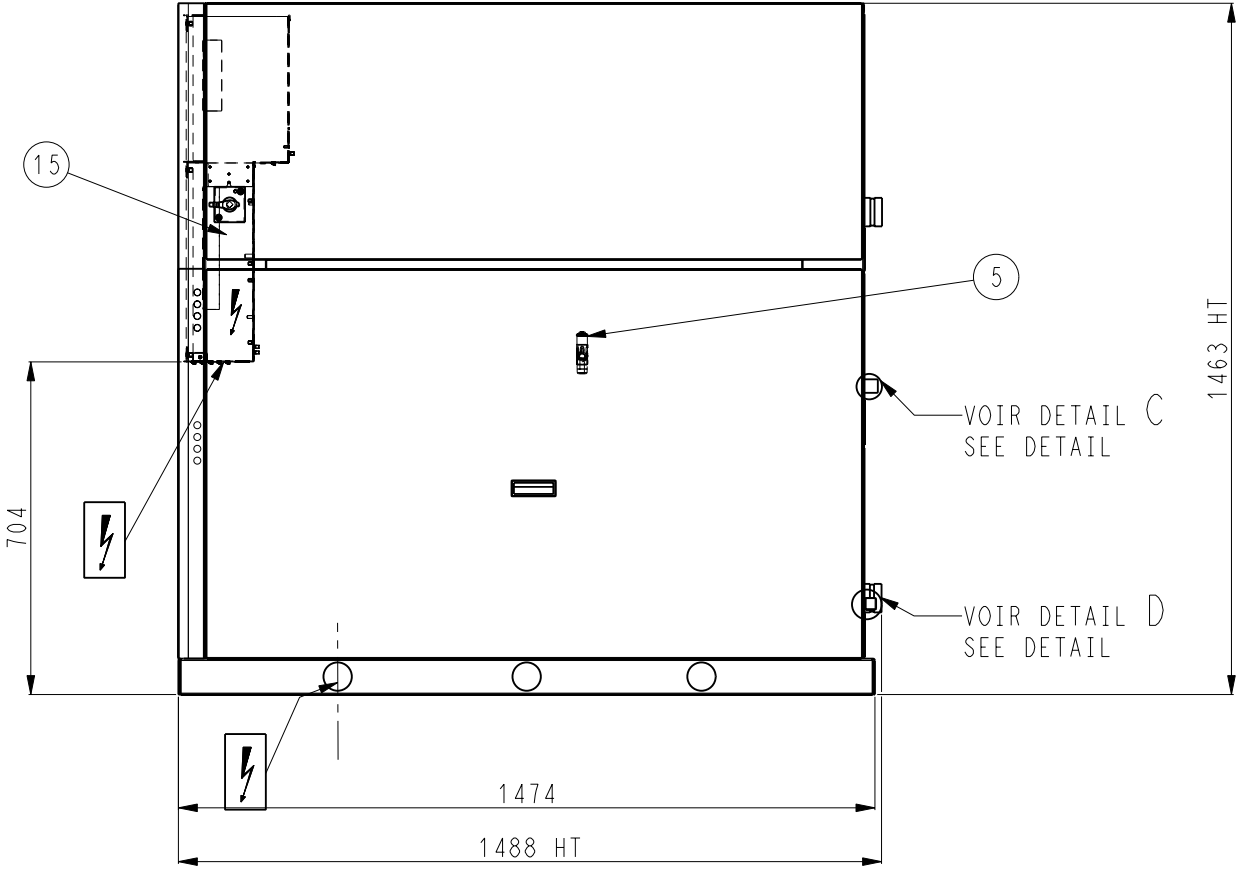
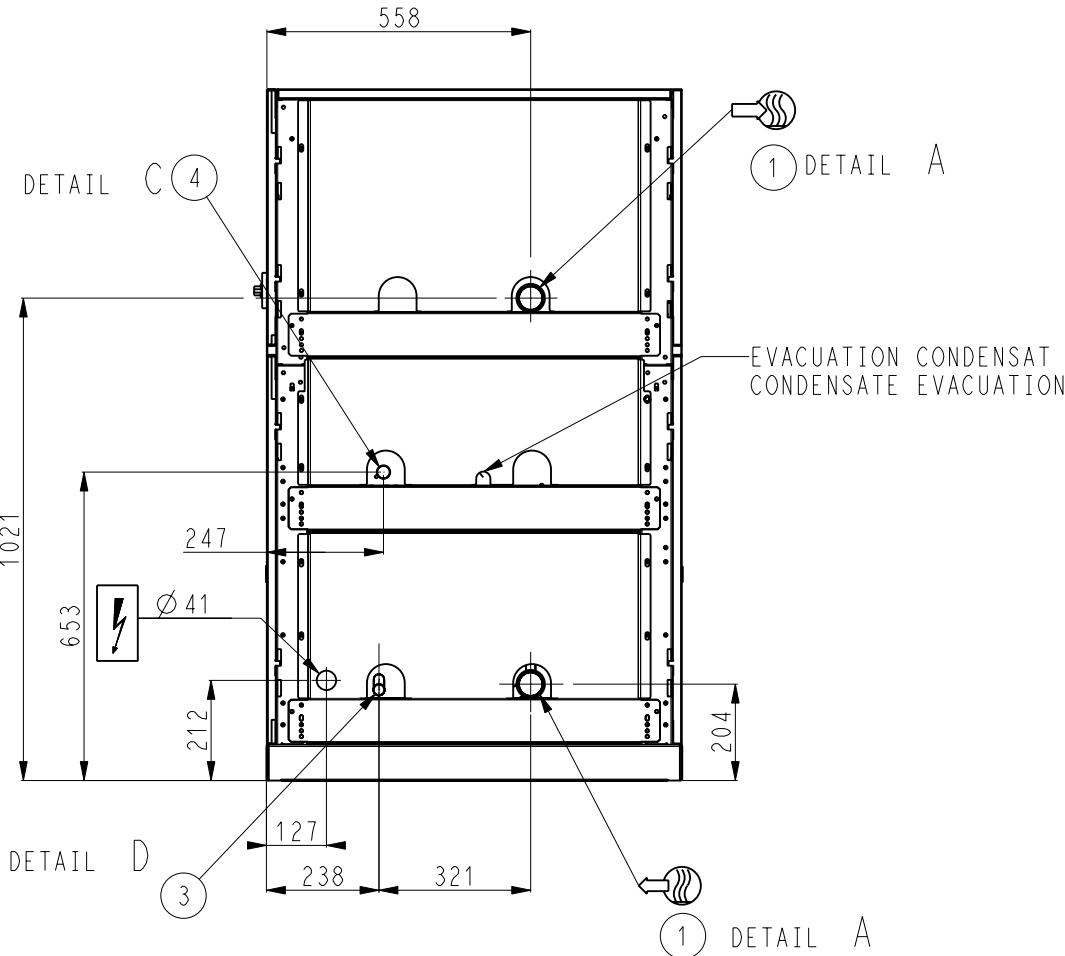



OPT 116


OPTION 70F ONLY

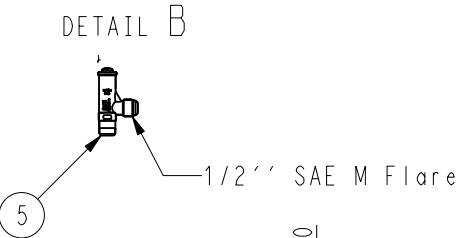


NOTE / NOTE:
Pour la connexion refrigerant
les bouchons doivent être enlevés
For refrigerant connection
caps must be removed

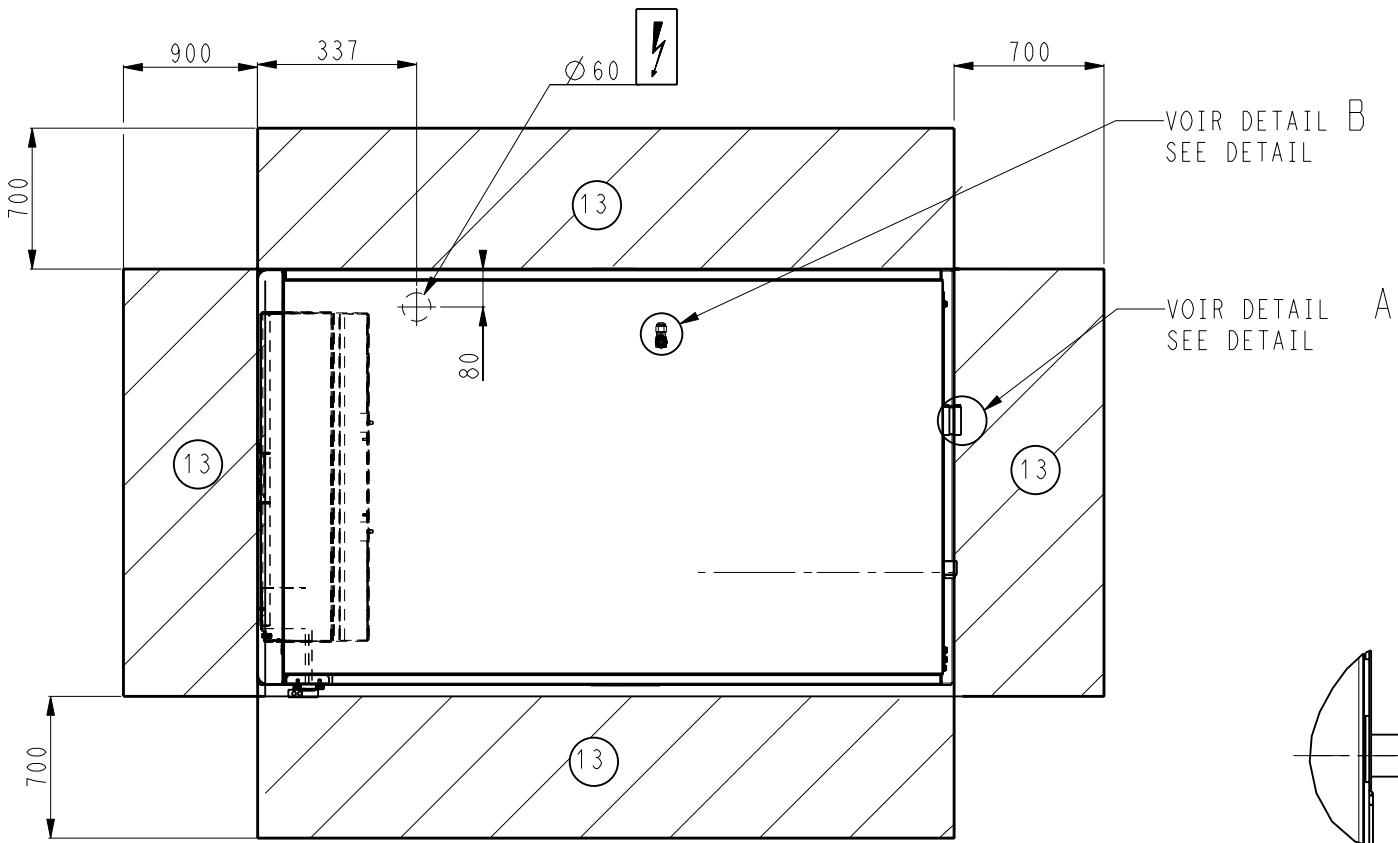

DETAIL A
ECHELLE 1:4




DETAIL D
ECHELLE 1:4






DETAIL C
ECHELLE 1:4




TOLERANCE	±10	30WGA 050 - 090	Carrier	DATE 10-Mar-2016	Feuille Sheet 1/4 Indice
			00DCG000058800	B	

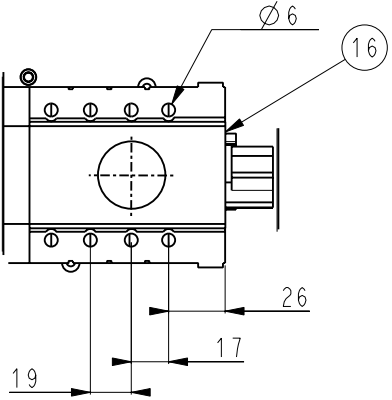

DETAIL B
ECHELLE 23:80

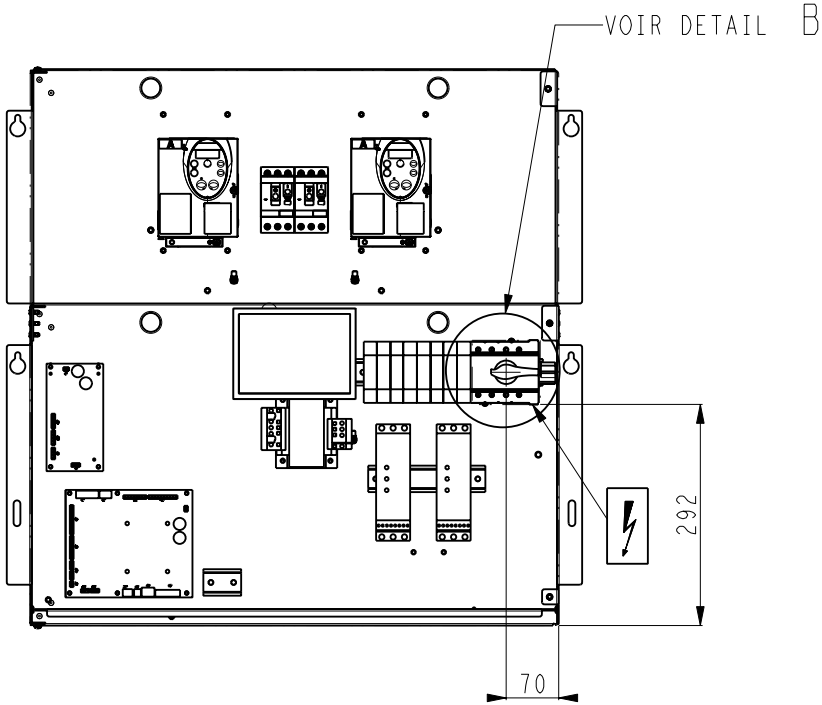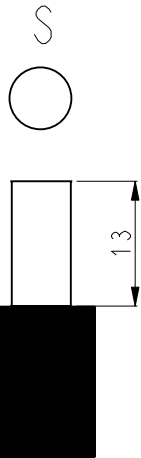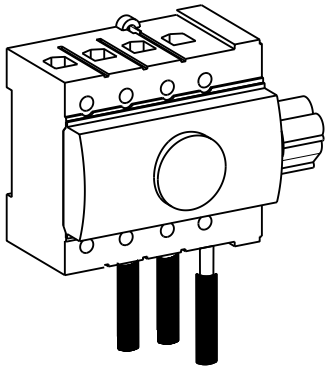

VOIR DETAIL B

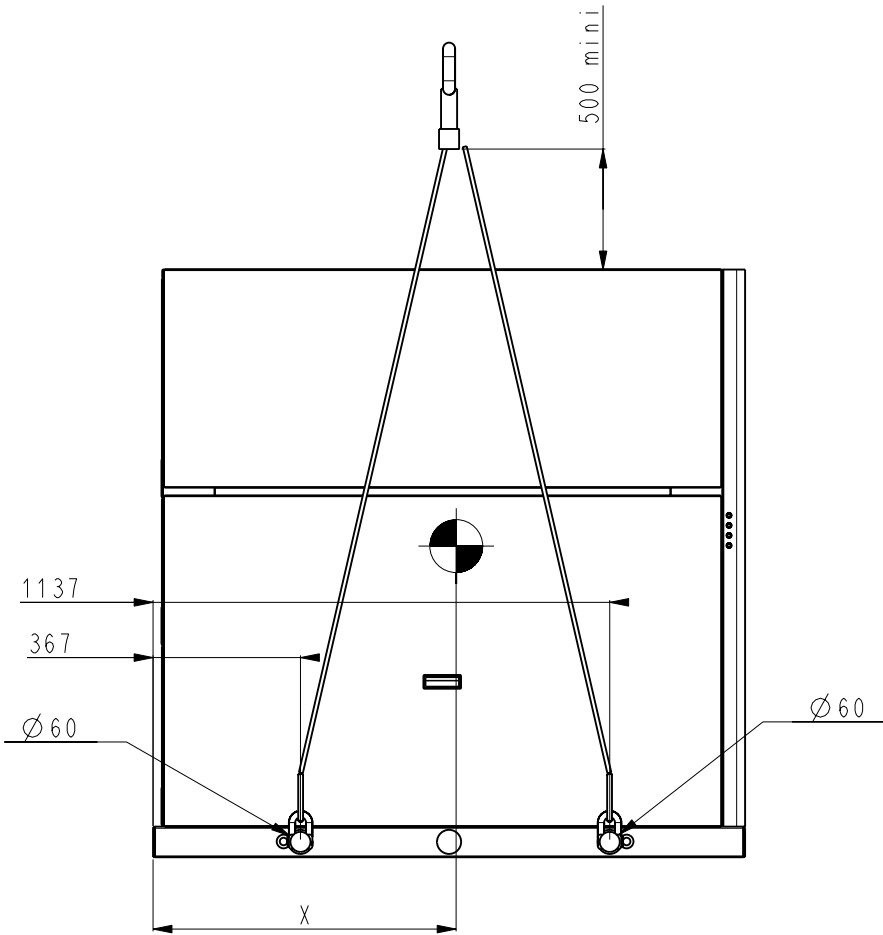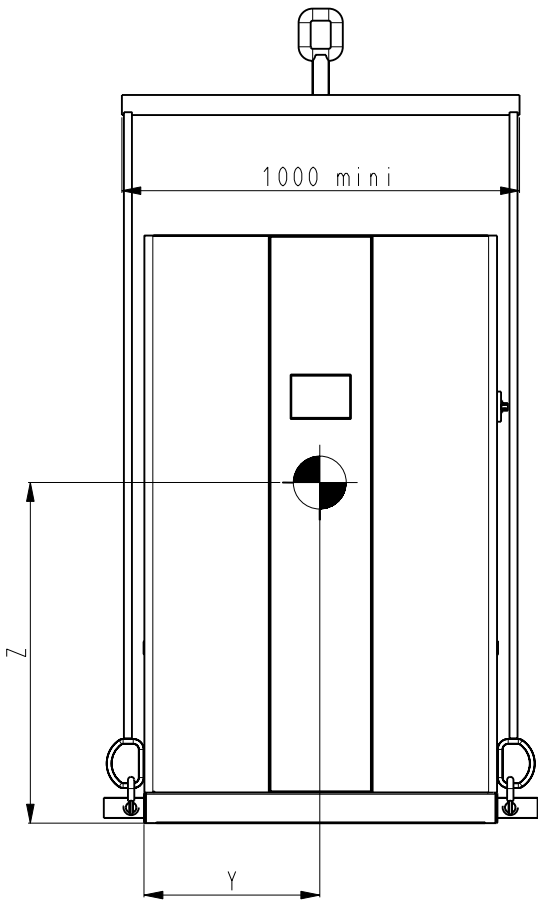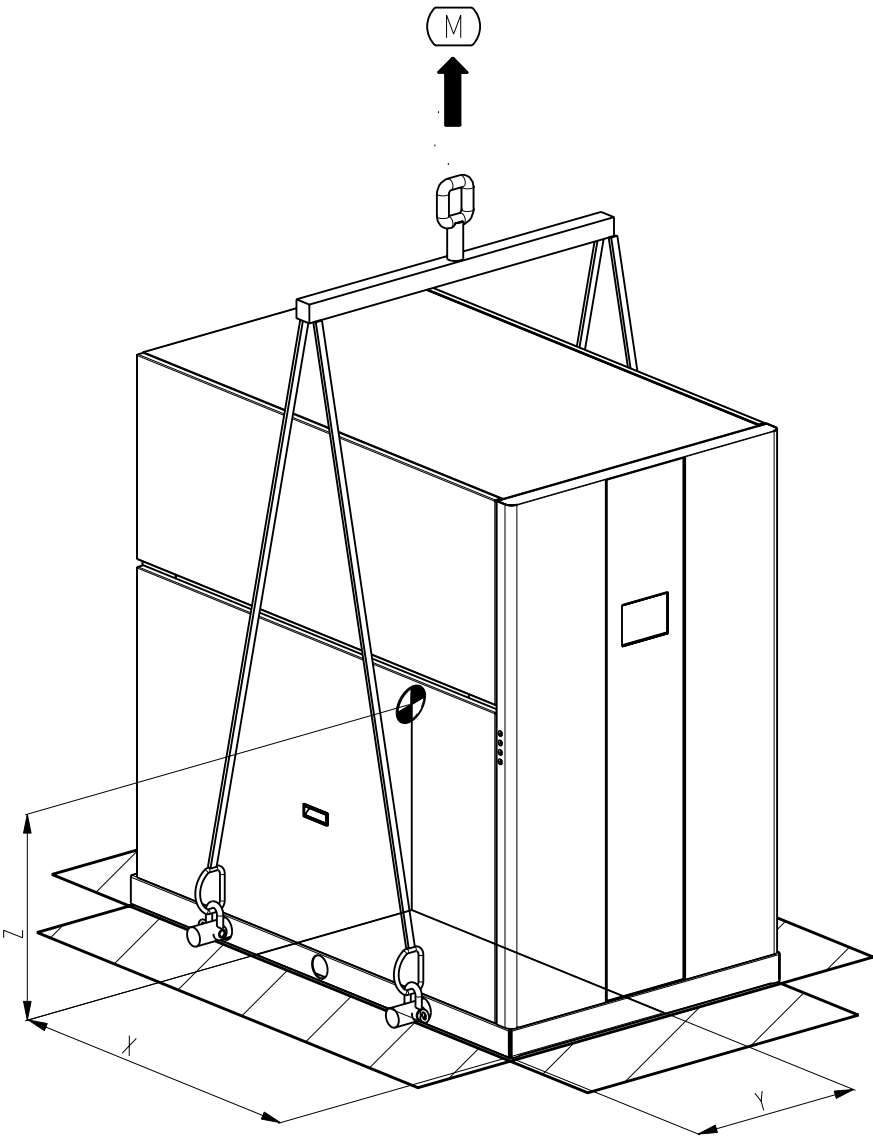

TOLERANCE	30WGA 050 - 090	DATE	10-Mar-2016	Feuille Sheet 2/4
±10		00DCG000058800	Indice	B

SIZE	OPTION				POIDS / WEIGHT +/- 5%
		X mm	Y mm	Z mm	PT Kg
50	116T	682	428	537	420
60		685	427	537	424
70		683	428	539	432
80		681	428	532	439
90		676	424	539	456
50	116V	682	427	542	431
60		684	426	542	435
70		683	427	544	442
80		681	427	536	449
90		675	424	542	465
50	116T+258	682	428	537	434
60		685	427	537	438
70		683	428	539	446
80		681	428	532	453
90		676	424	539	470
50	116V+258	682	427	542	445
60		684	426	542	449
70		683	427	544	456
80		681	427	536	463
90		675	424	542	479

