




OPT 268:269

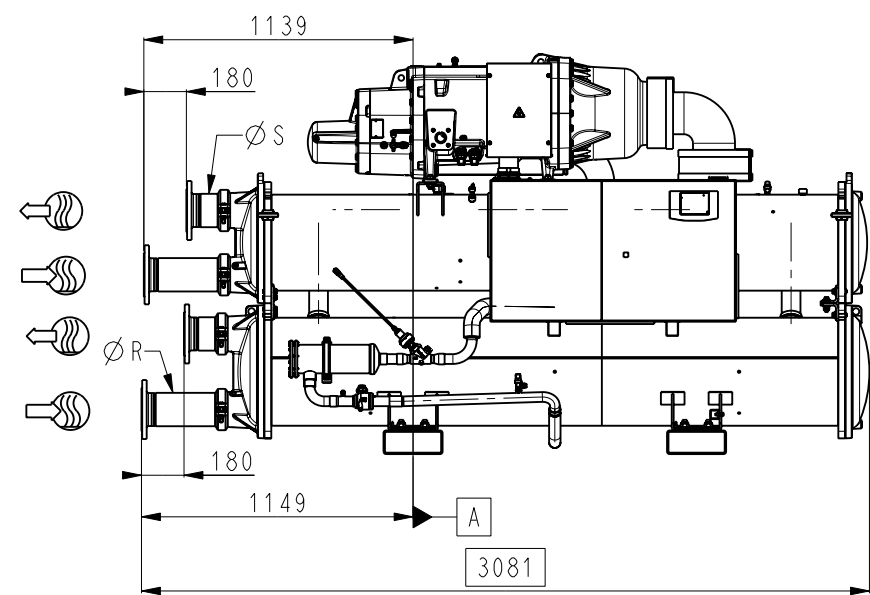


OPT 268:269:107A

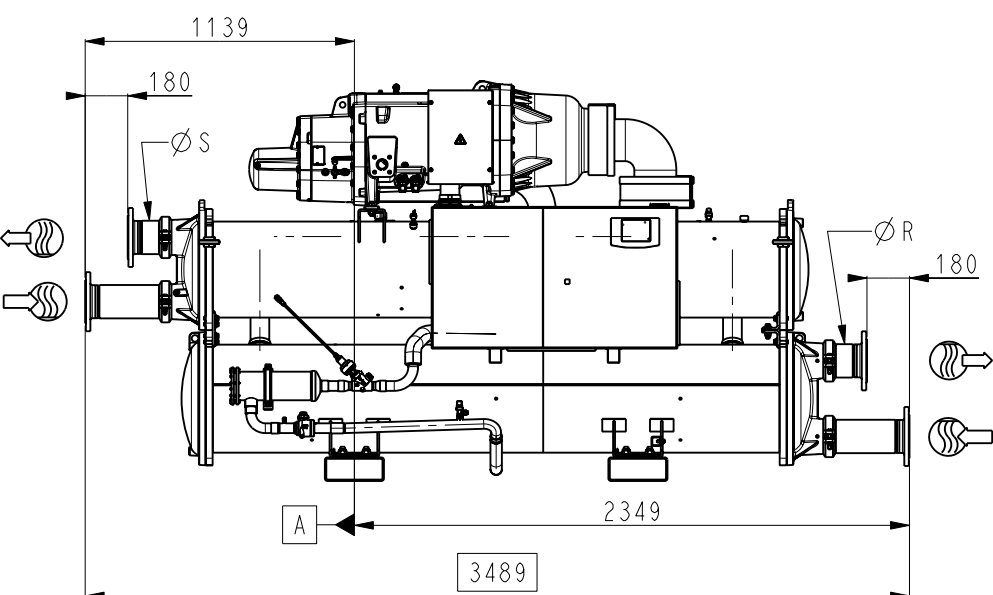


OPT 268:269:100C:107A OR OPT 268:269:OPTION 6:107A

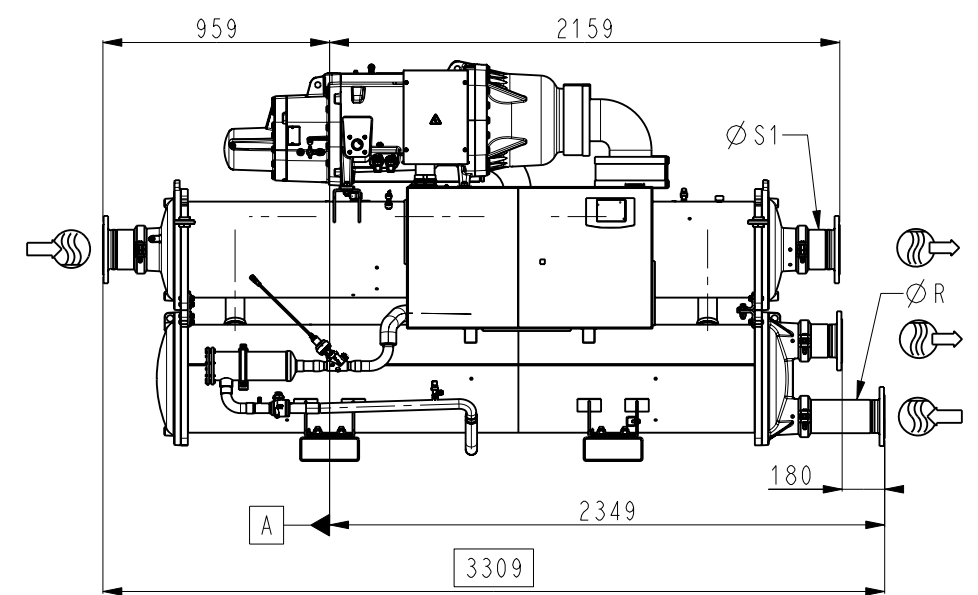


OPT 268:269:107

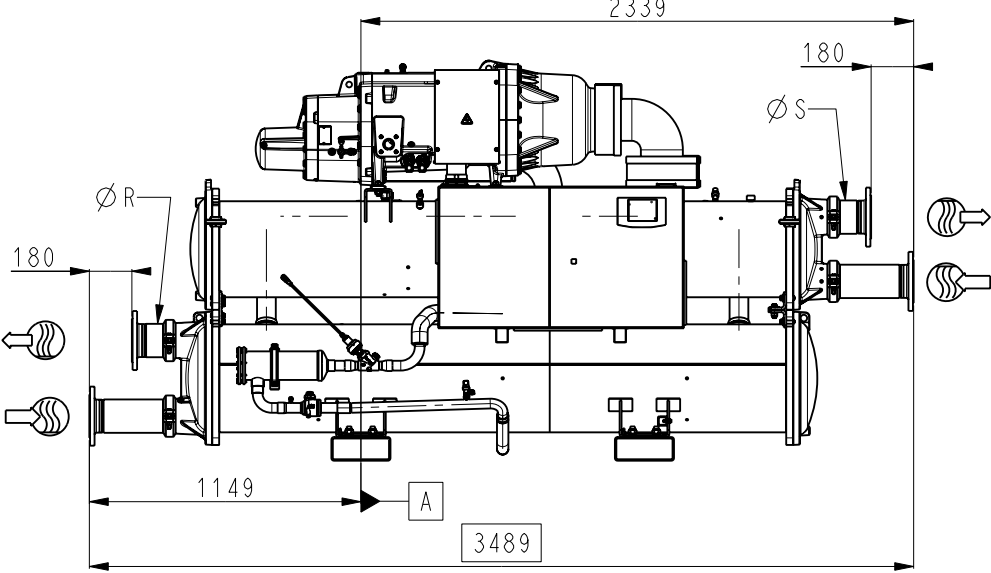


OPT 268:269:100C OR OPT 268:269:OPTION 6

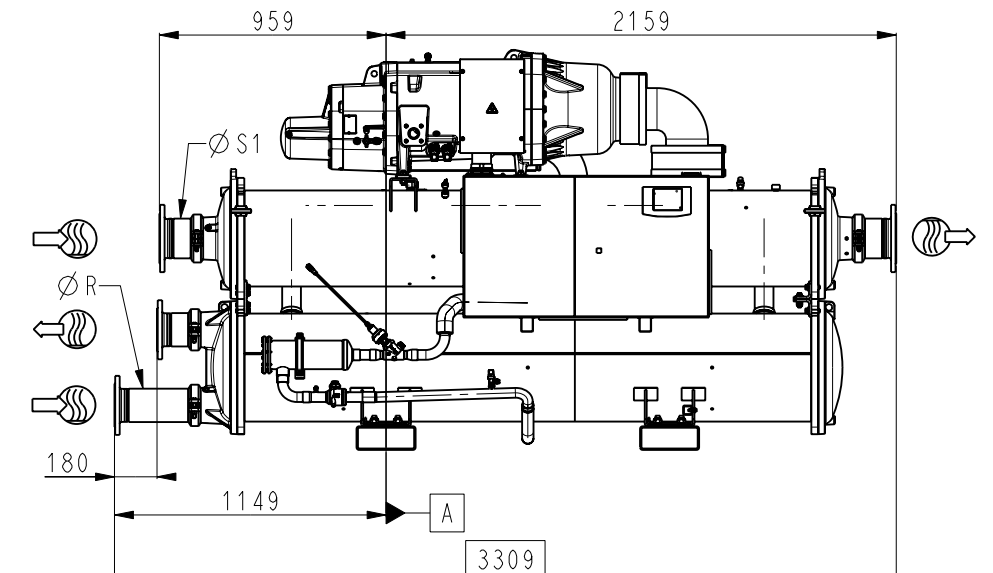


OPT 268:269:100C:107:107A OR OPT 268:269:OPTION 6:107:107A

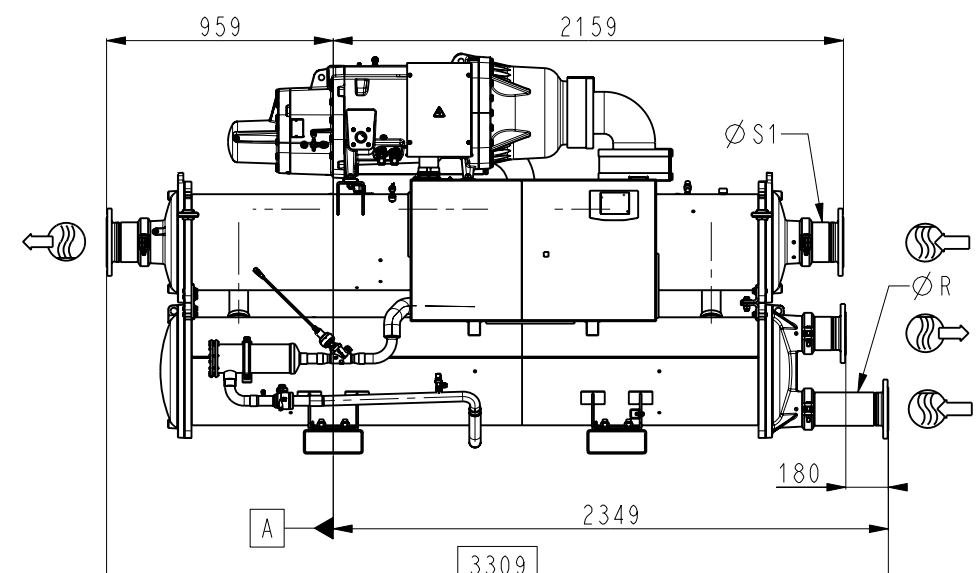


OPT 268:269:107:107A

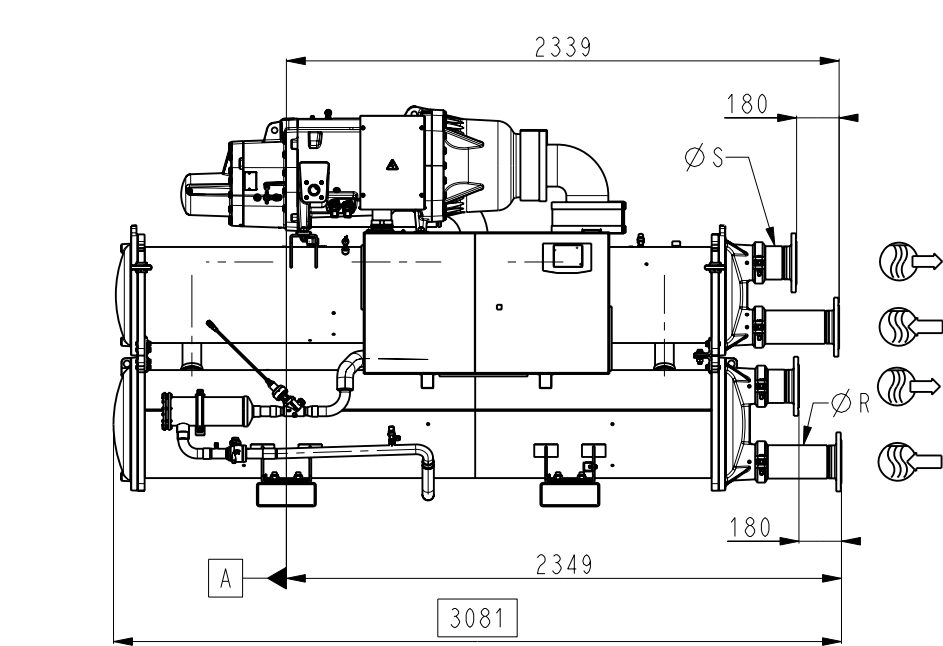


OPT 268:269:100C:107 OR OPT 268:269:OPTION 6:107

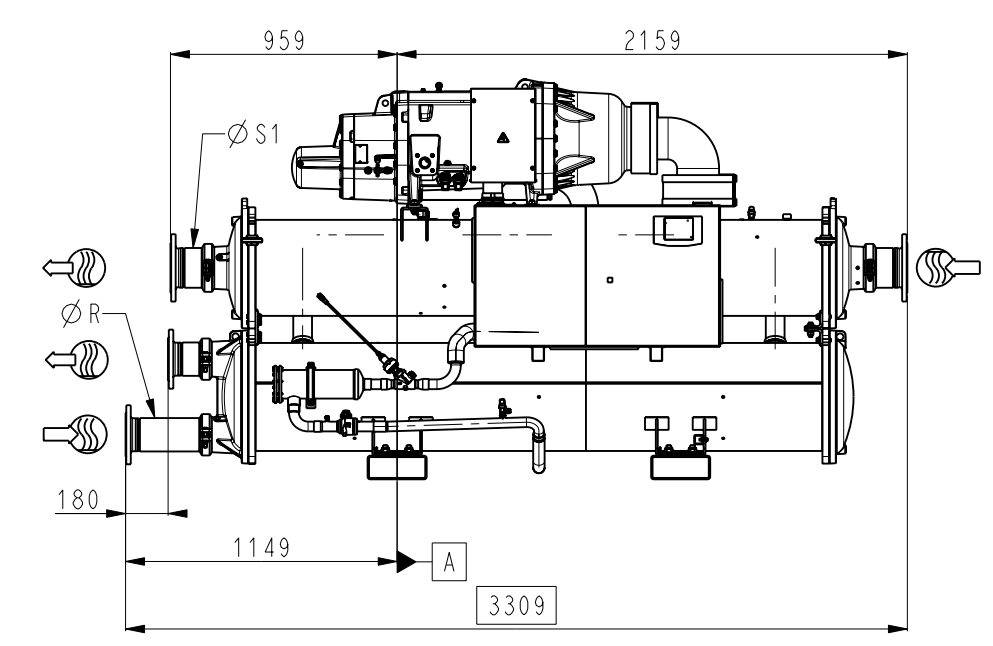


OPT 268:269:102C

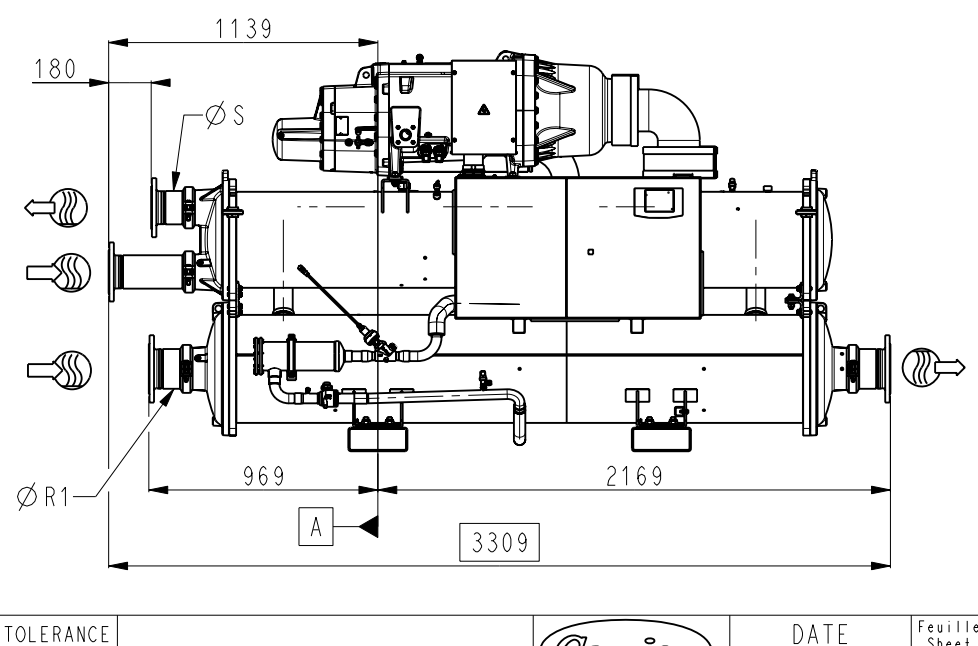


OPT 268+269+102C+107

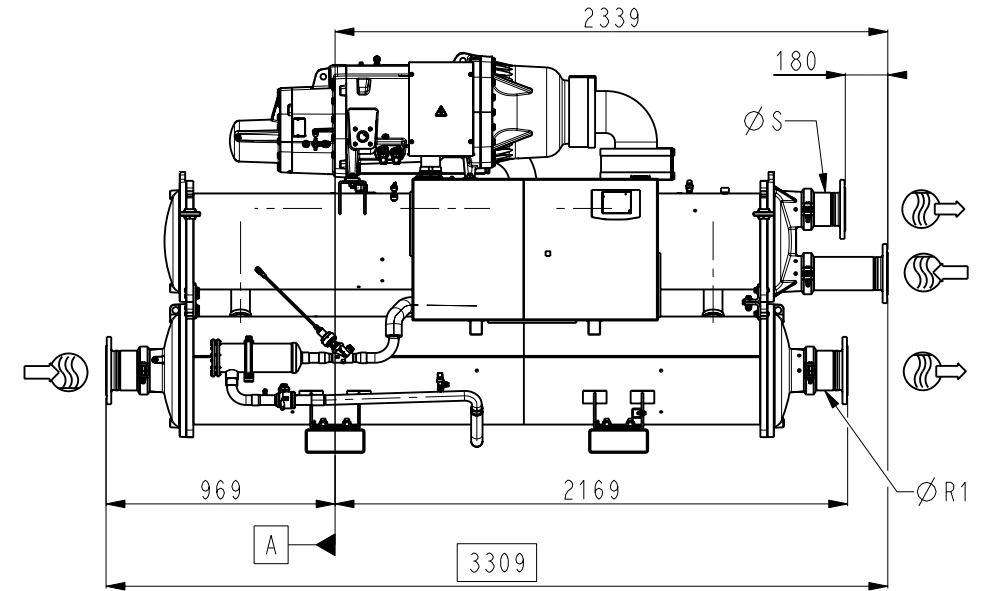


OPT 268+269+100C+102C OR OPT 268+269+OPTION 6+102C

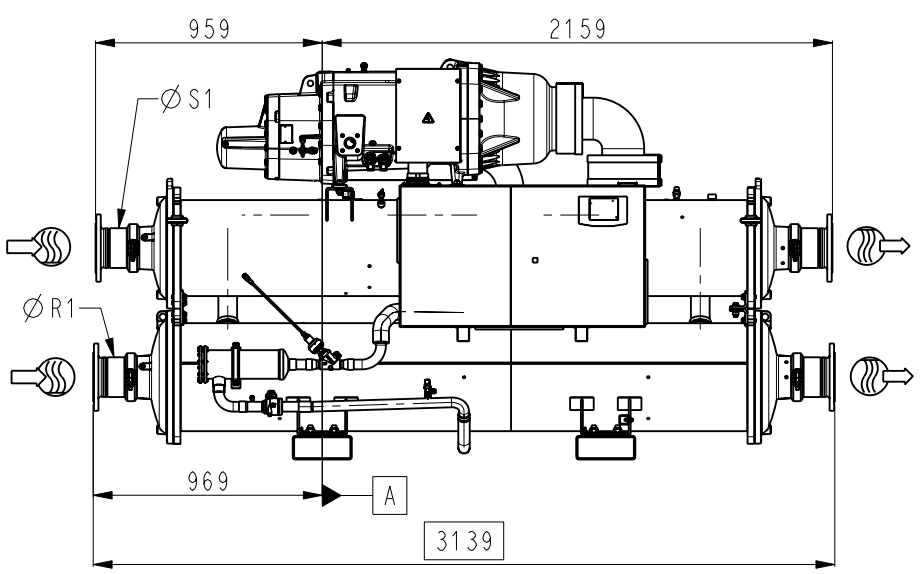


OPT 268+269+100C+102C+107A OR OPT 268+269+OPTION 6+102C+107A

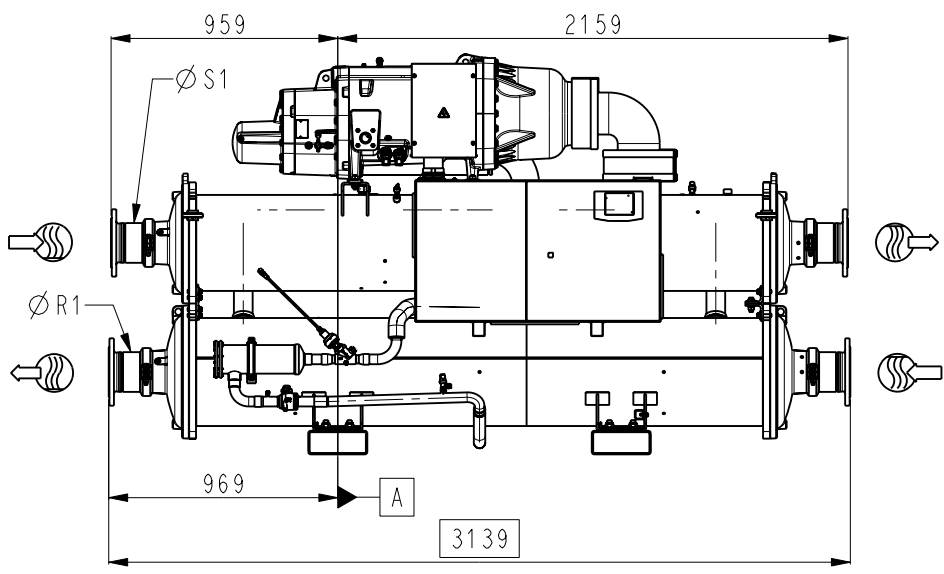


OPT 268+269+102C+107A

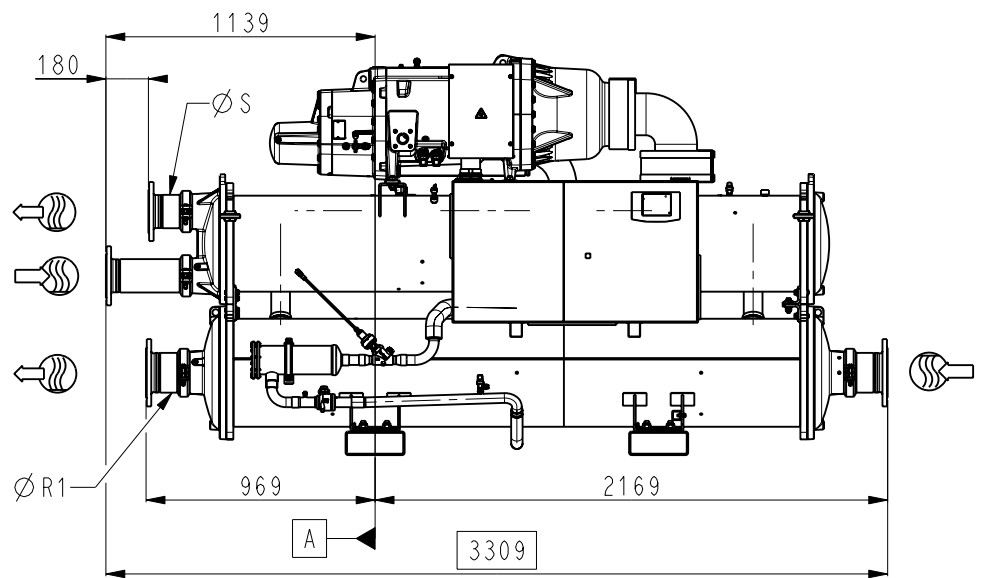


OPT 268+269+100C+102C+107 OR OPT 268+269+OPTION 6+102C+107

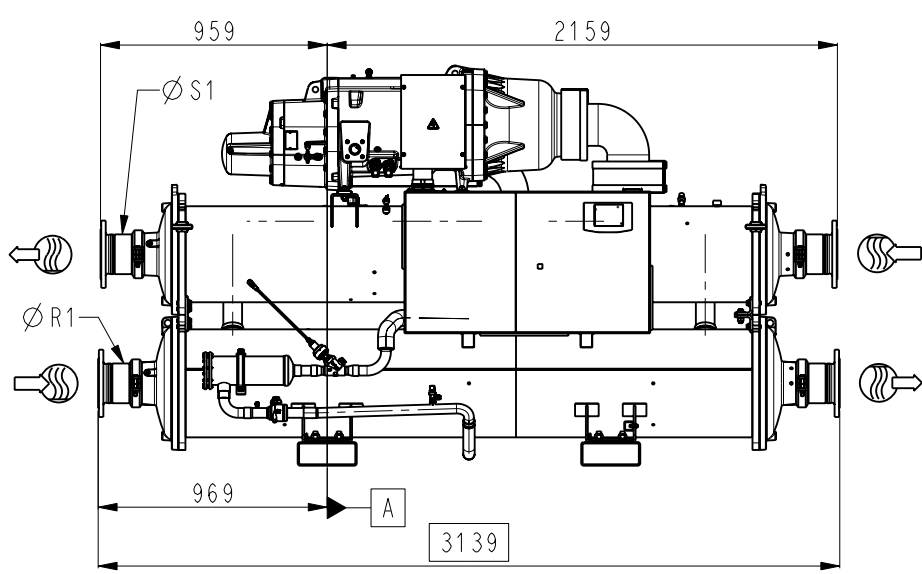


OPT 268+269+100C+102C+107+107A OR OPT 268+269+OPTION 6+102C+107+107A

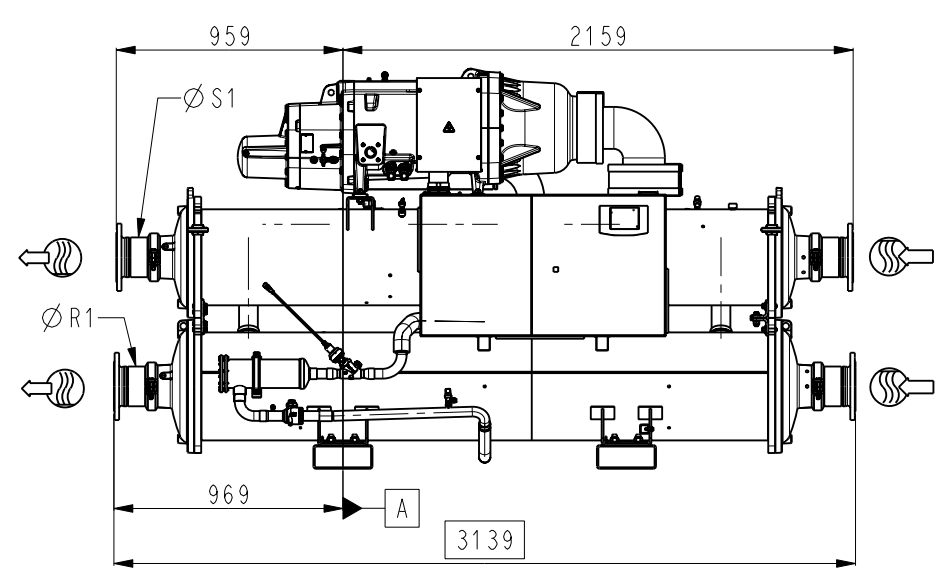

OPT 268+269+102C+107+107A

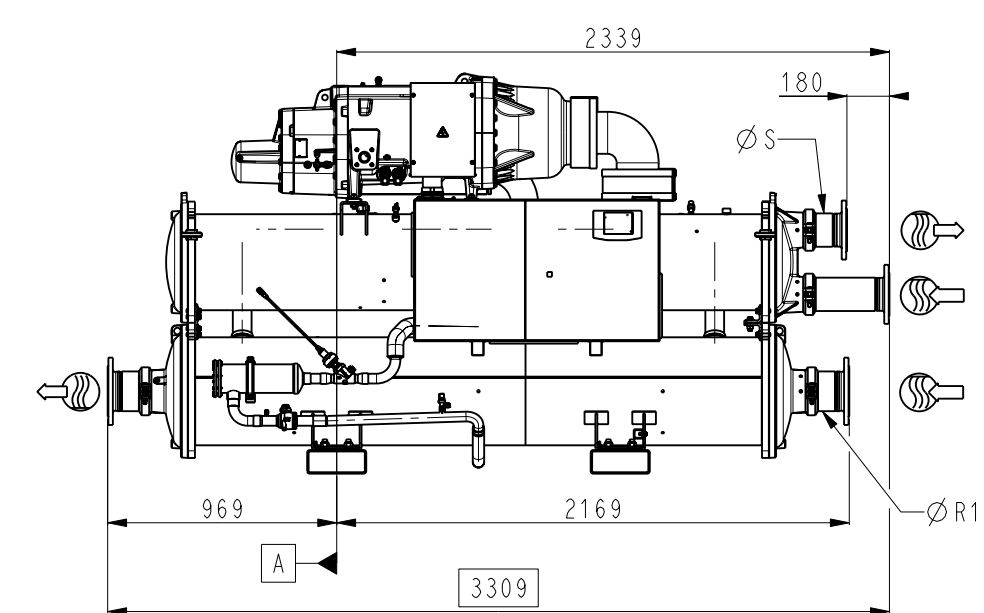

BRIDES PN16 SELON EN 1092-1
FLANGES PN16 ACCORDING EN 1092-1



	Ø S mm	Ø S1 mm	Ø R mm	Ø R1 mm
30XW 0452 0552 0602	141.3	168.3	141.3	168.3
	DN125	DN150	DN125	DN150