

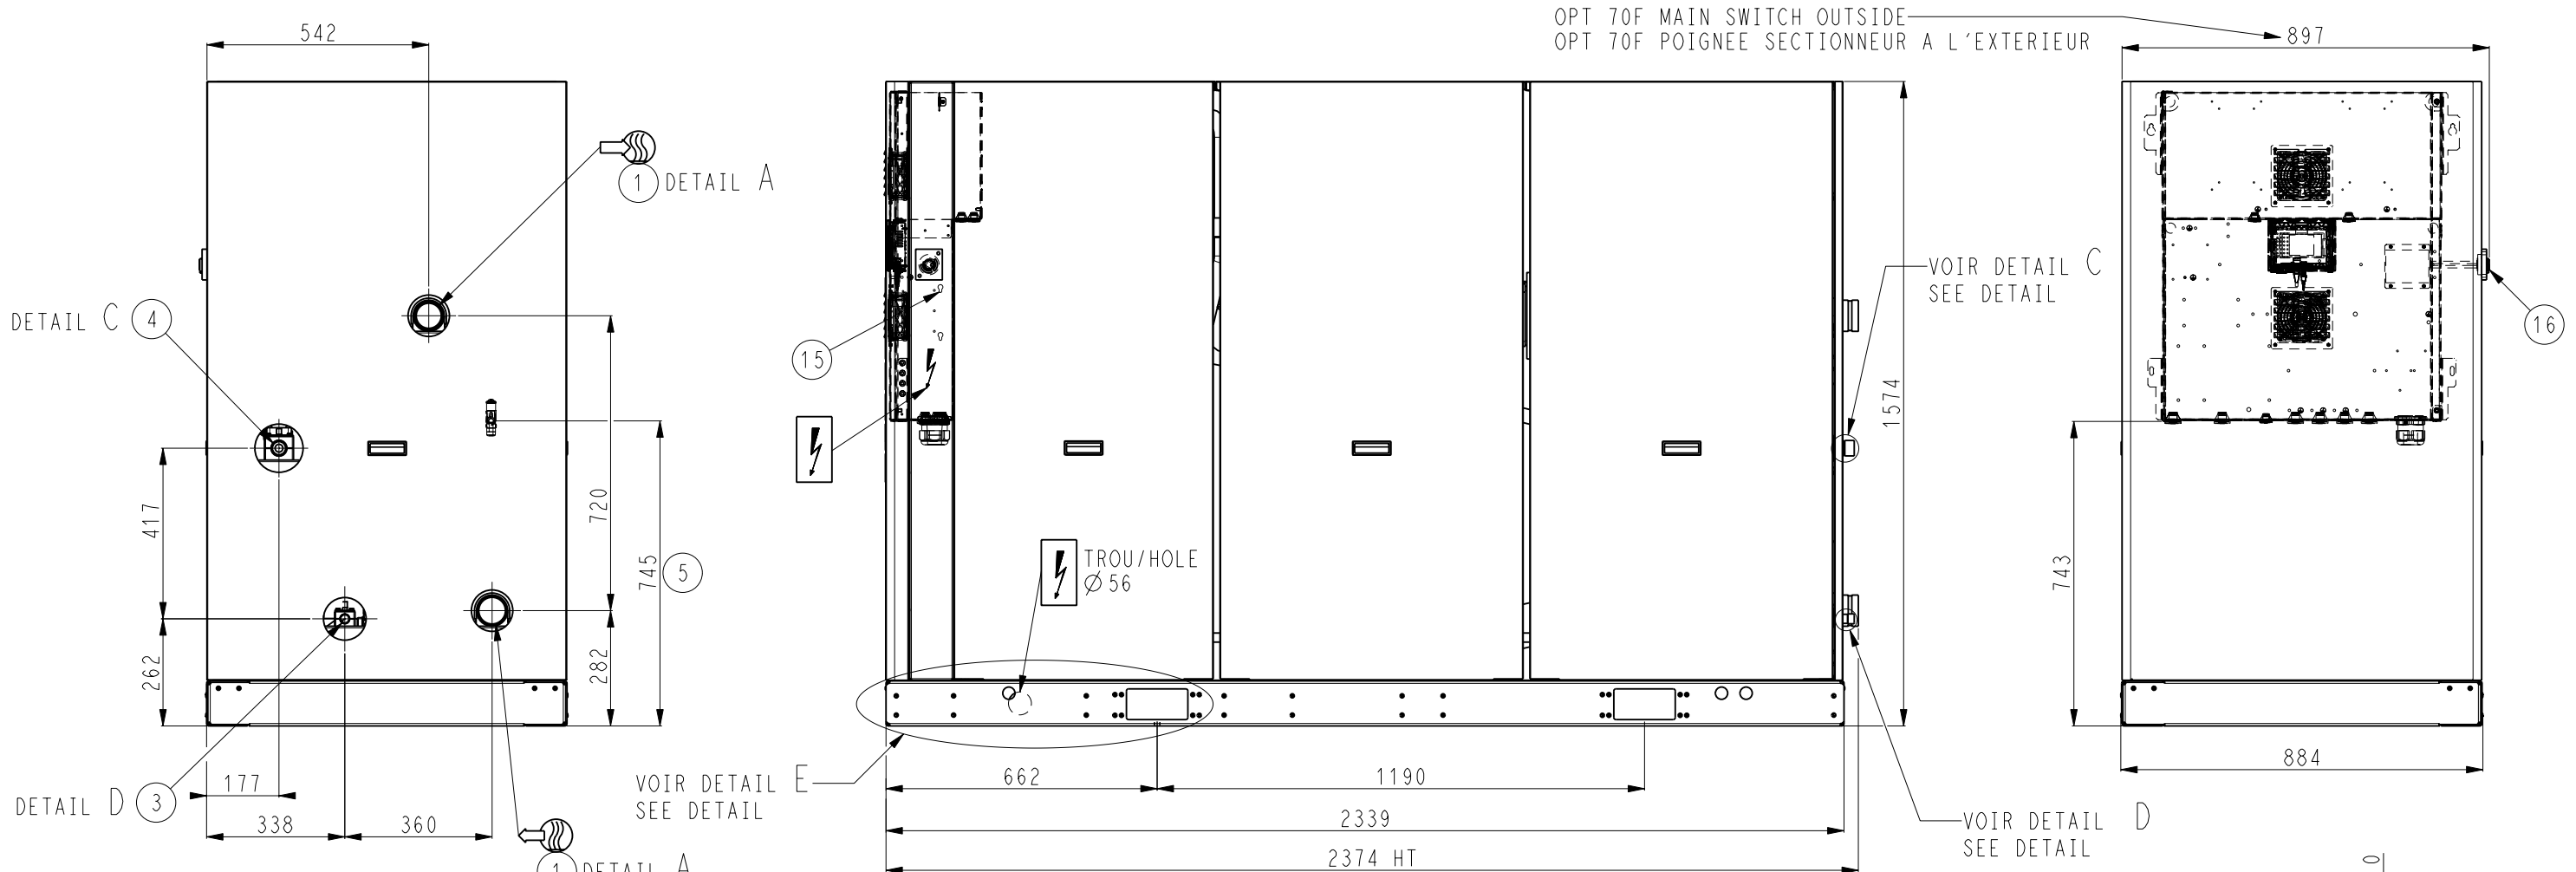


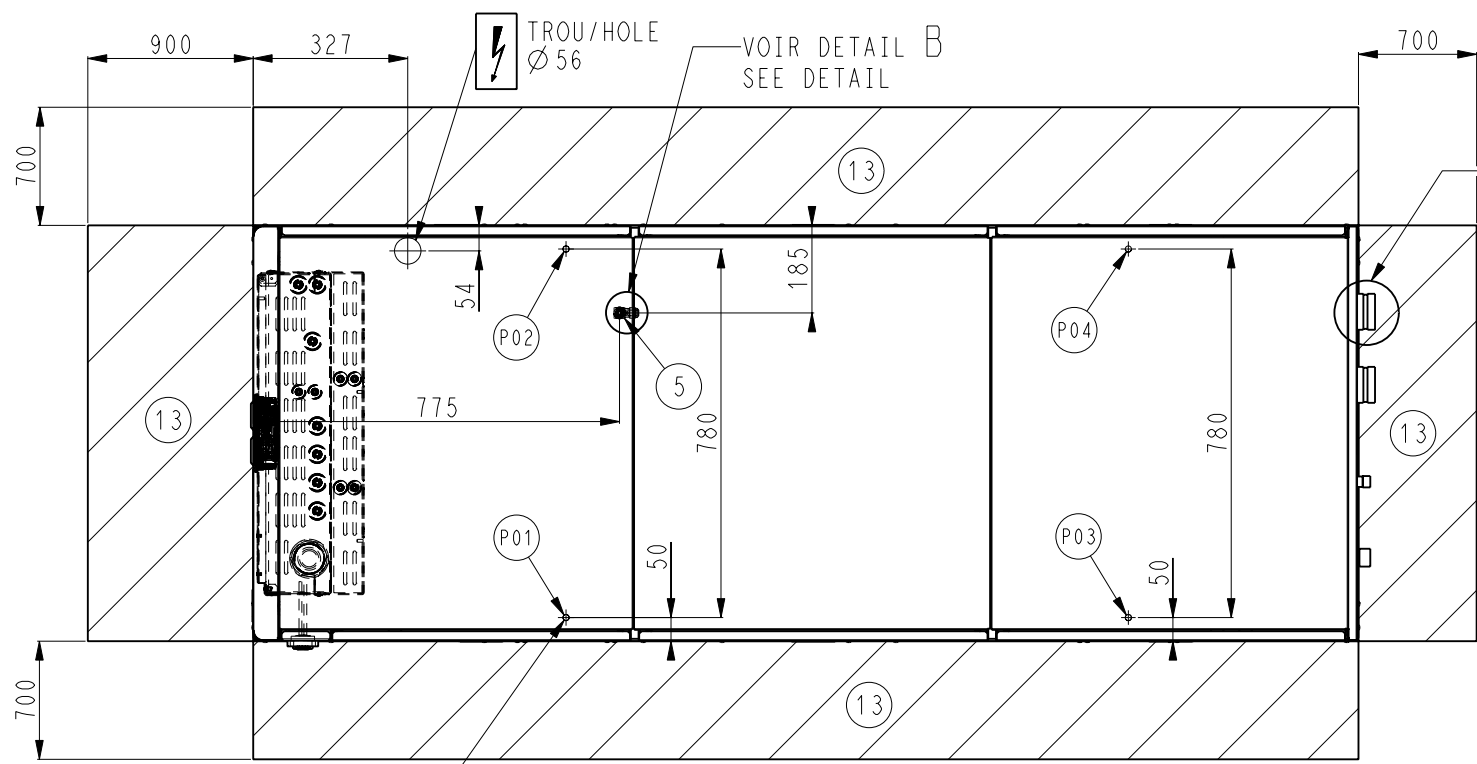

DEBIT DES MASSES SOUPAPES MAX: 564 Kg/h
CAPACITY TO SURFACE TO PROTECT



Ø A	
OPT 264 MANCHETTE A VISSER OPT 264 SCREW CONNECTION SLEEVES	1 A VISSER 2"1/2 (GAZ CONIQUE) Ø 76.10 BSPT (TAPER THREADS)
OPT 266 MANCHETTE A SOUDER OPT 266 WELDED CONNECTION SLEEVES	1 2"1/2 ACIER A SOUDER Ø 76.10 STEEL FOR WELDING

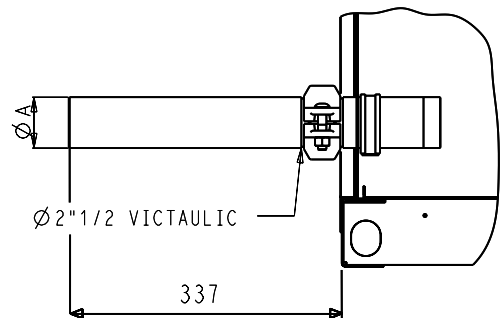




4 TROUS Ø 13
HOLES

TROU Ø 13
HOLE

DETAIL E
ECHELLE 29:320

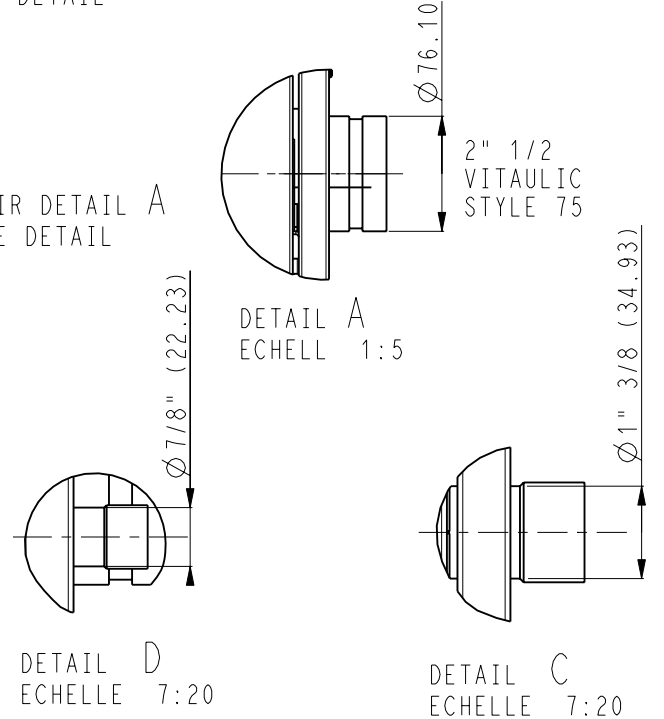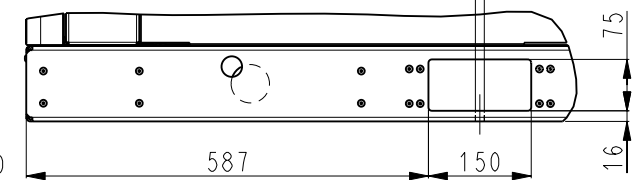

NOTE / NOTE:
Pour la connexion refrigerant
les bouchons doivent être enlevés
For refrigerant connection
caps must be removed

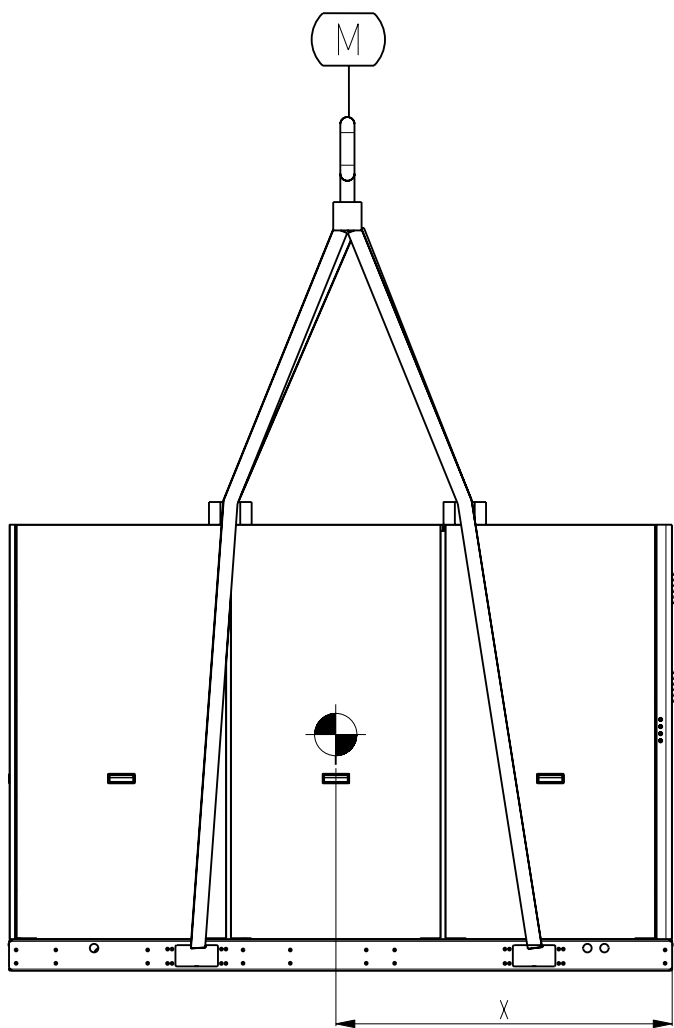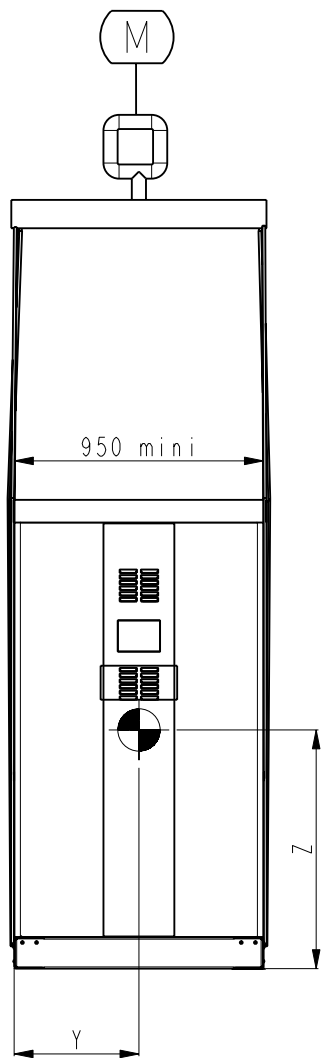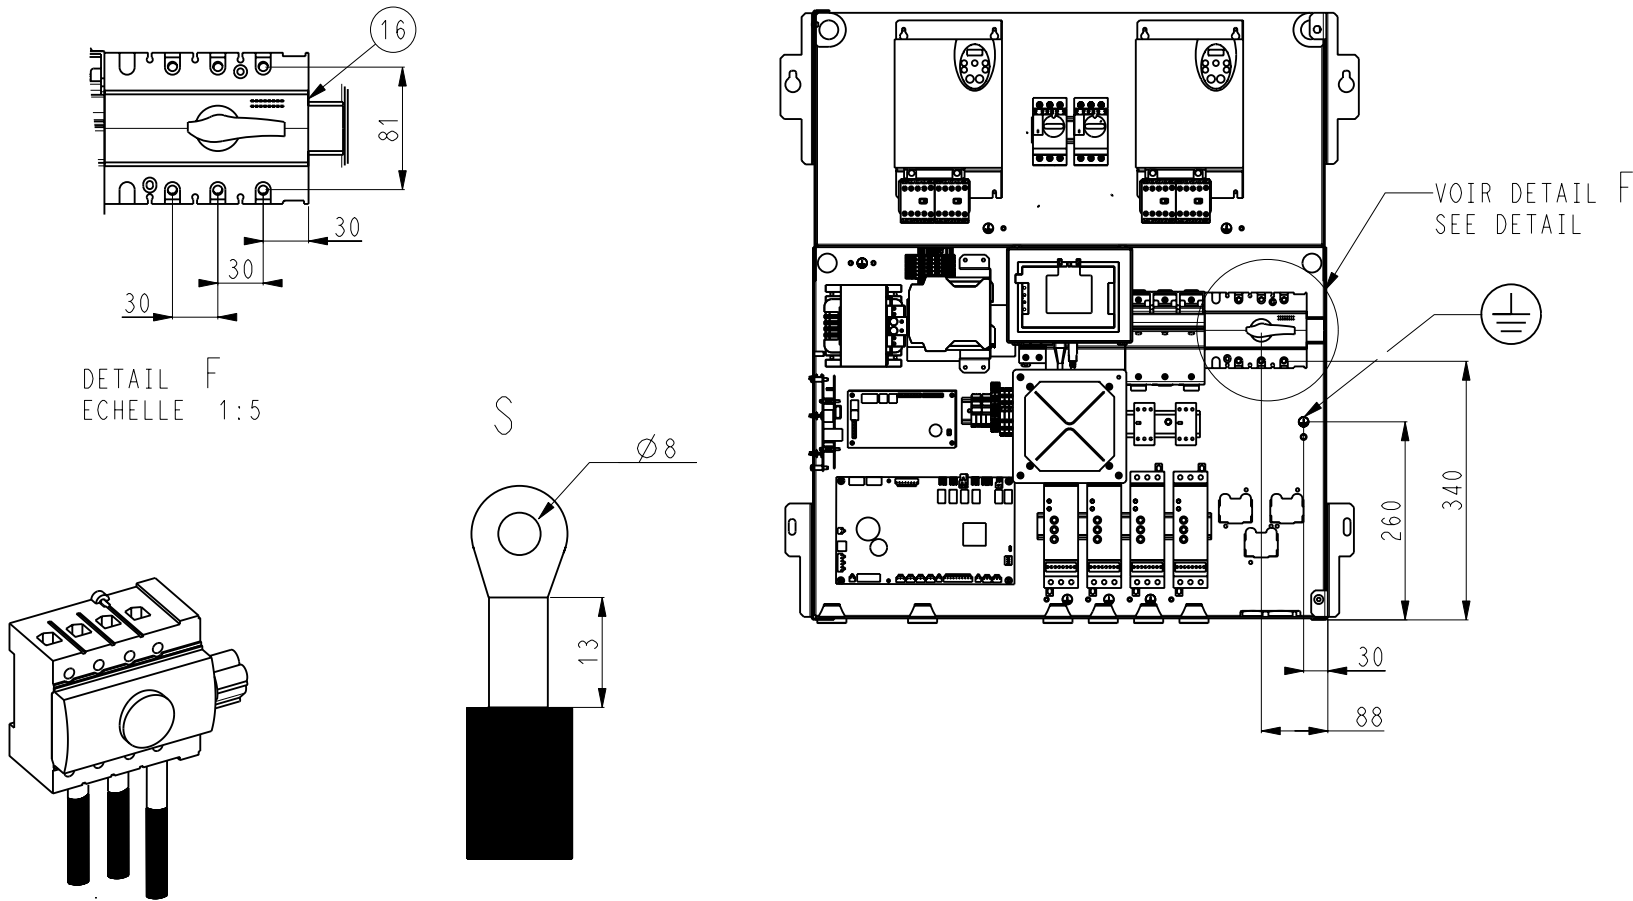

X (mm)	Y (mm)	Z (mm)
1090±70	460±20	780±50

TOLERANCE	30WGA 110 - 140	DATE	19-Jul-2017	Feuille Sheet 2/3
±10		00DCG000265000	Indice	A

