




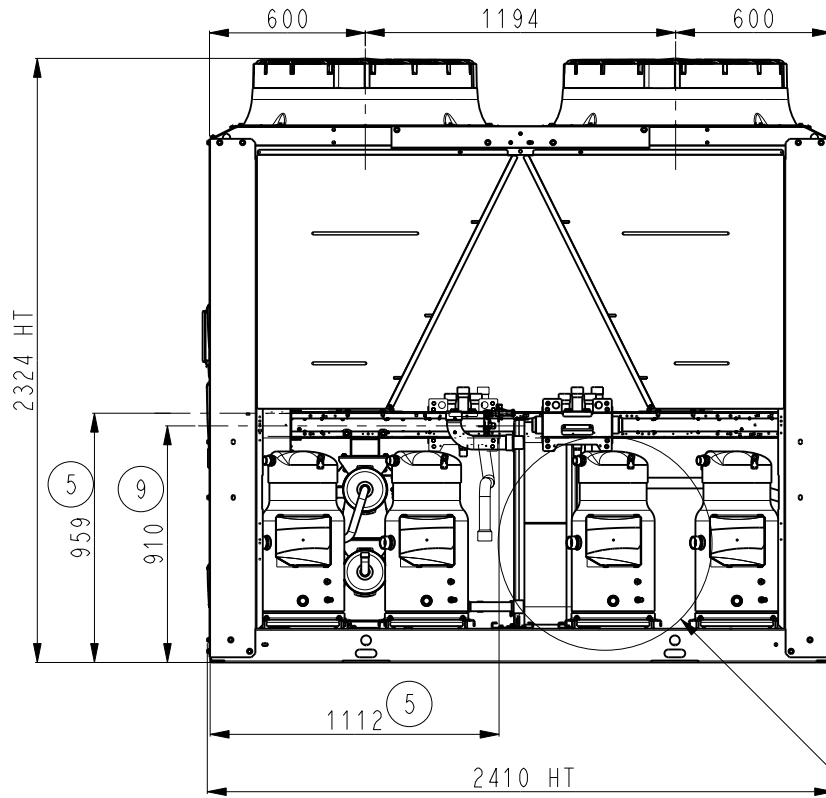



—VOIR DETAIL
SEE DETAIL

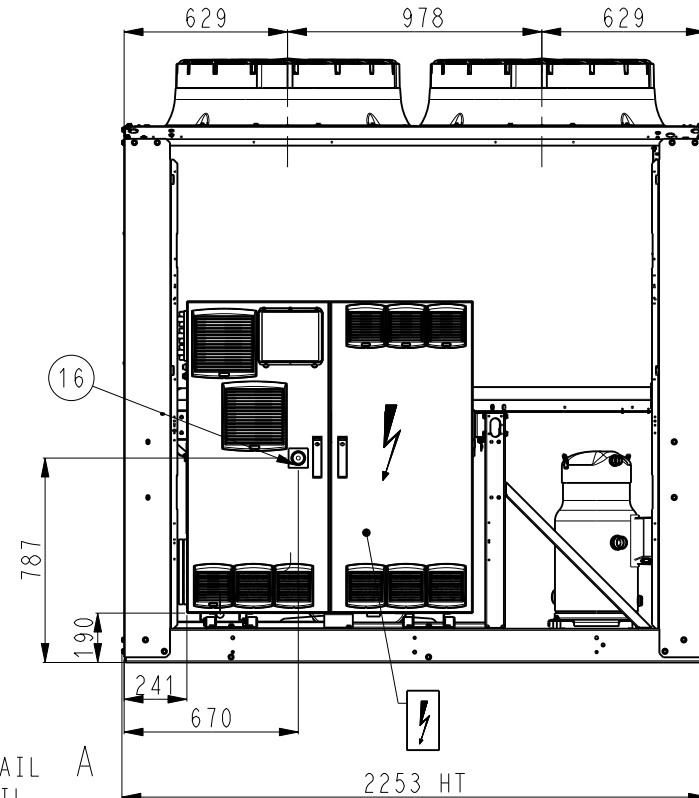


VOIR DETAIL
SEE DETAIL

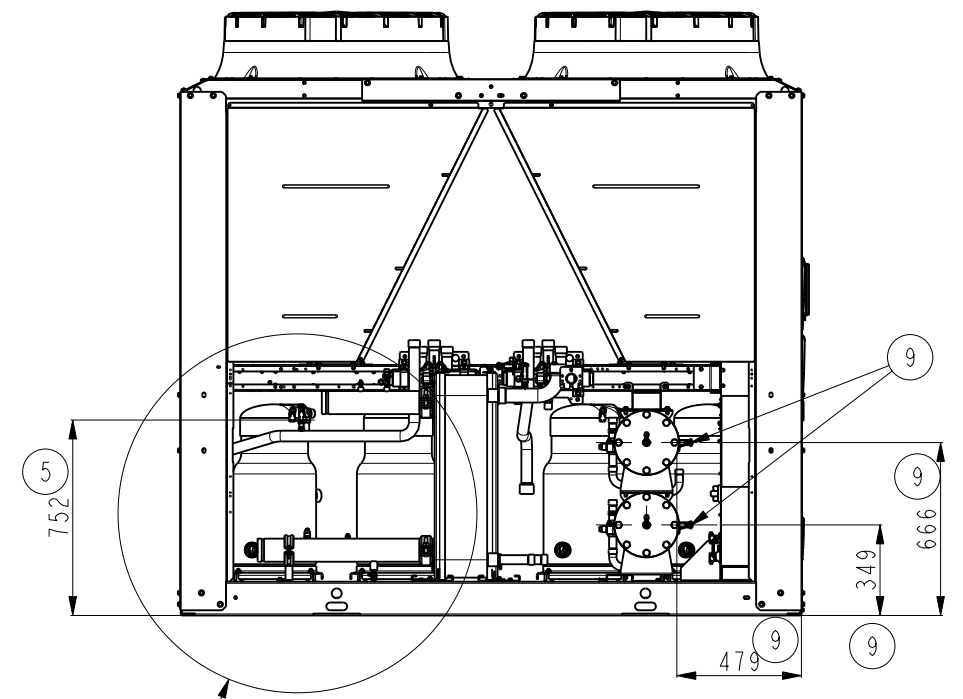


TAILLE 165R A 180R
SIZE 165R TO 180R

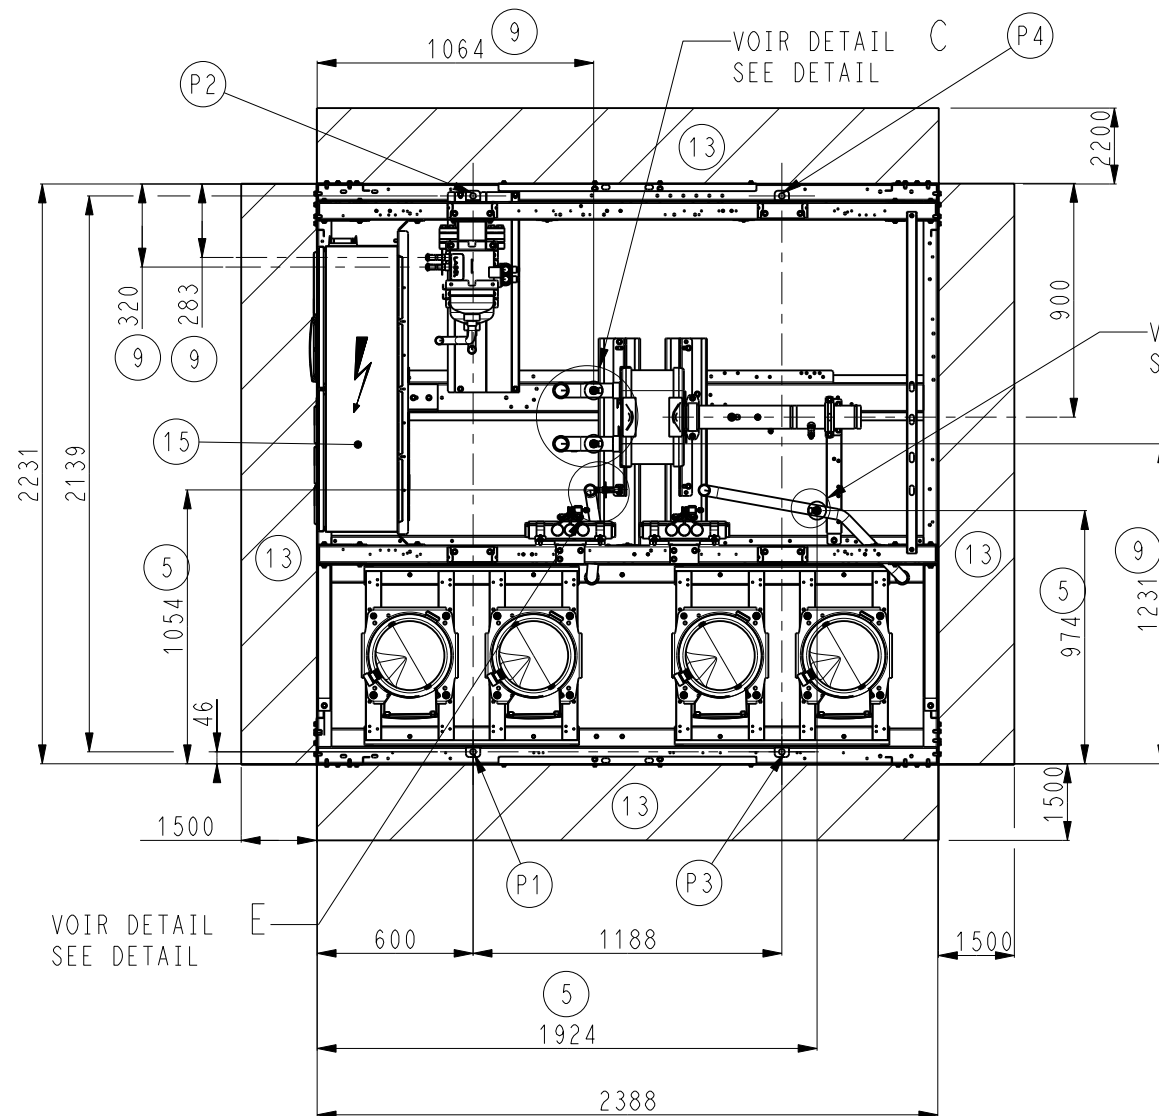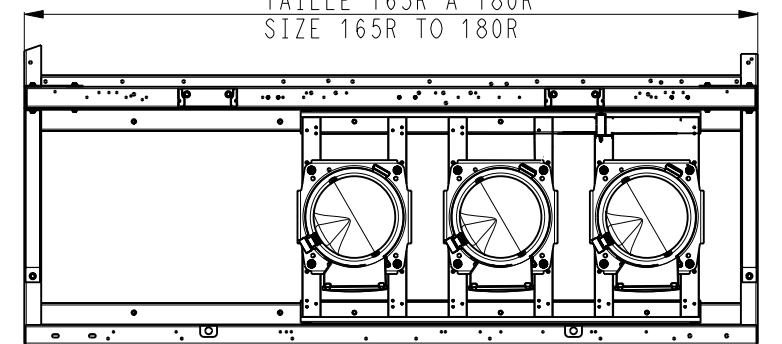


VOIR DETAIL
SEE DETAIL

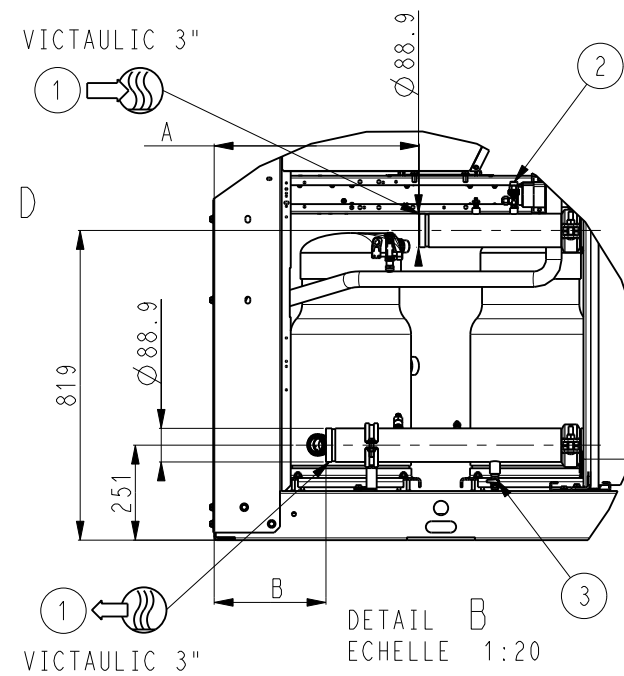


DETAIL B
ECHELLE 1:20




DETAIL C
ECHELLE 11:160




DETAIL SOUPAPE (5) & (9)

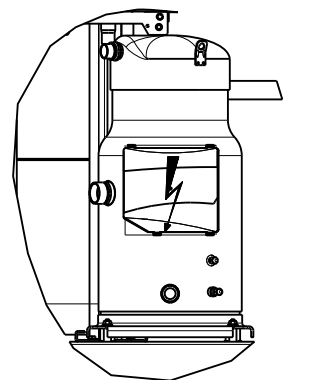

DETAIL A
ECHELLE 19:320

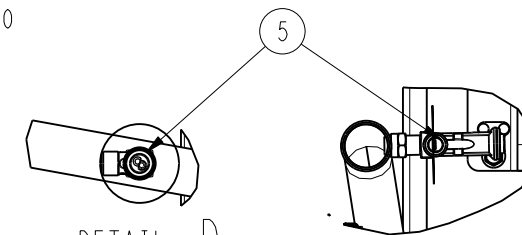


DETAIL D
ECHELLE 3:20




DETAIL E
ECHELLE 3:20

SIZE	A (mm)	B (mm)
165-180R	543	296
210R	543	296
230R	492	245
270R	492	245



TOLERANCE			DATE	Feuille Sheet 1/4
±10	30RQ-RQP165R - - - - -> 270R	<i>Carrier</i>	17-Aug-20	Indice
		00DCG000375800		A

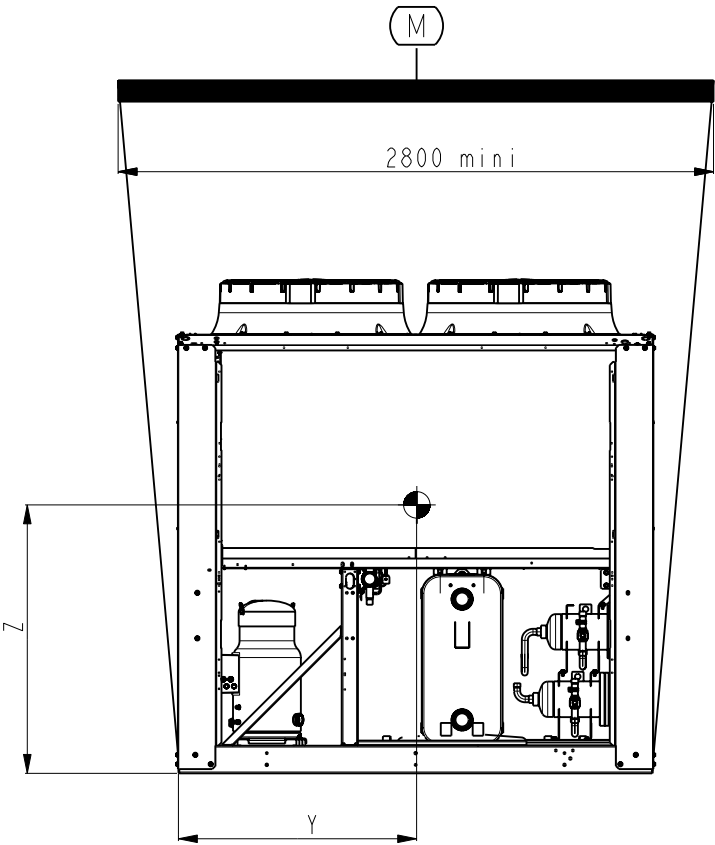


X (mm)	Y (mm)	Z (mm)
1127±55	974±25	819±15

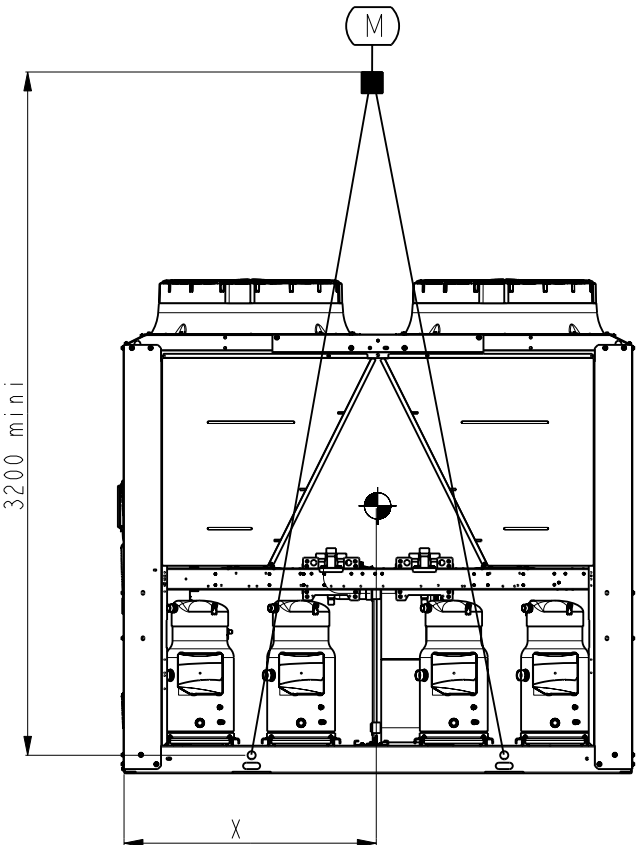

STANDARD

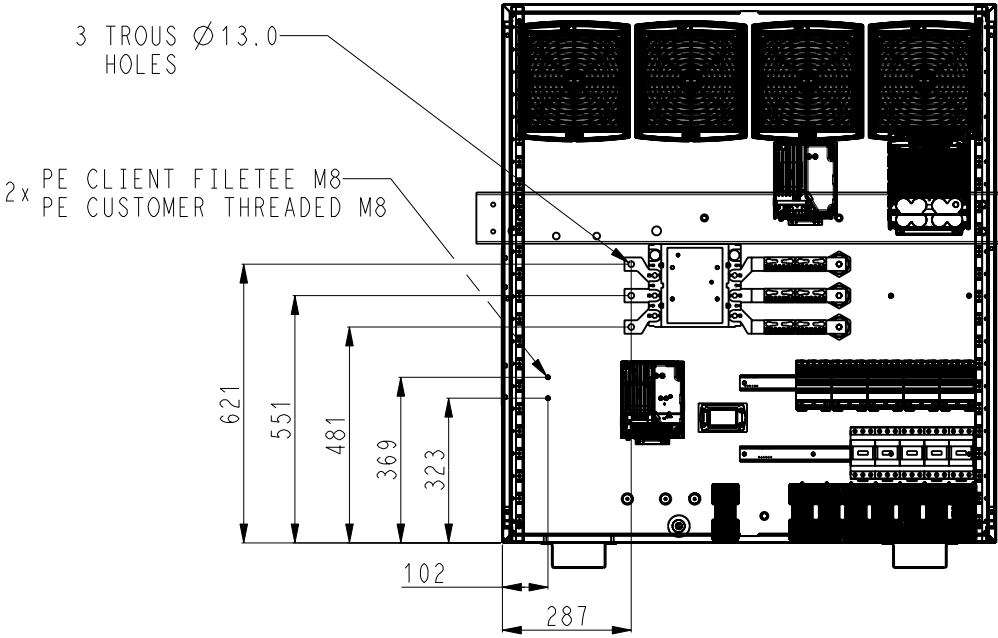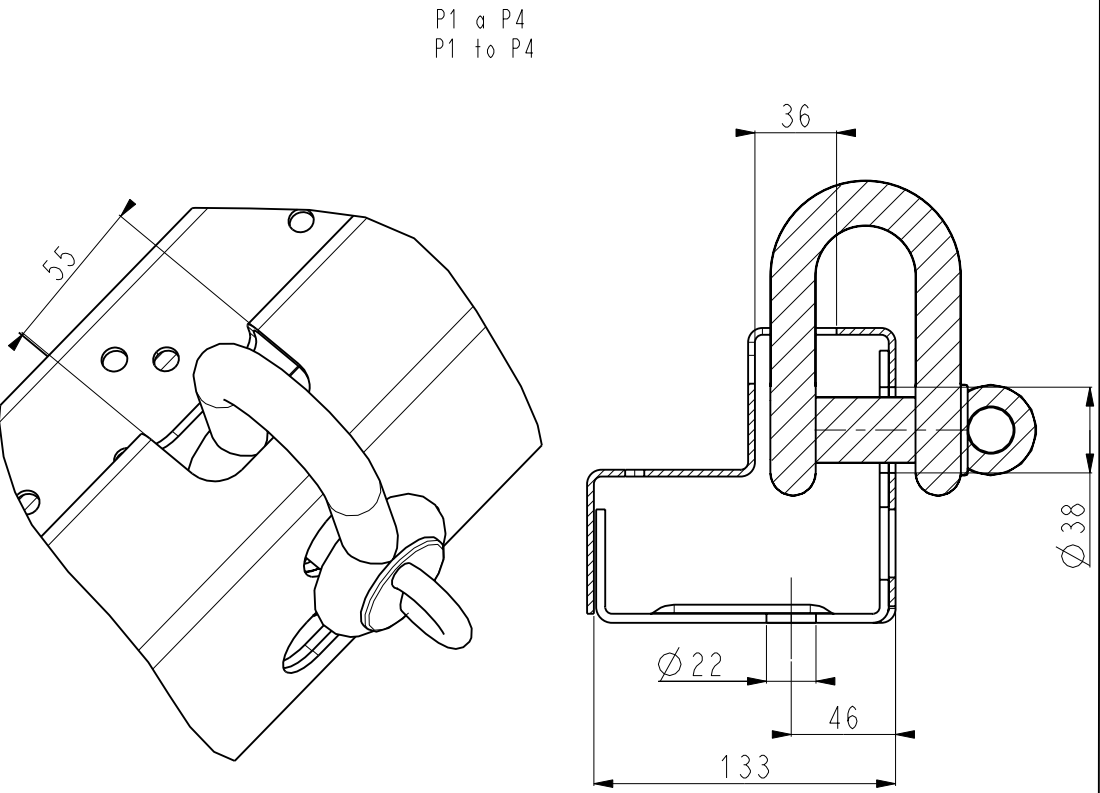

OPT 266

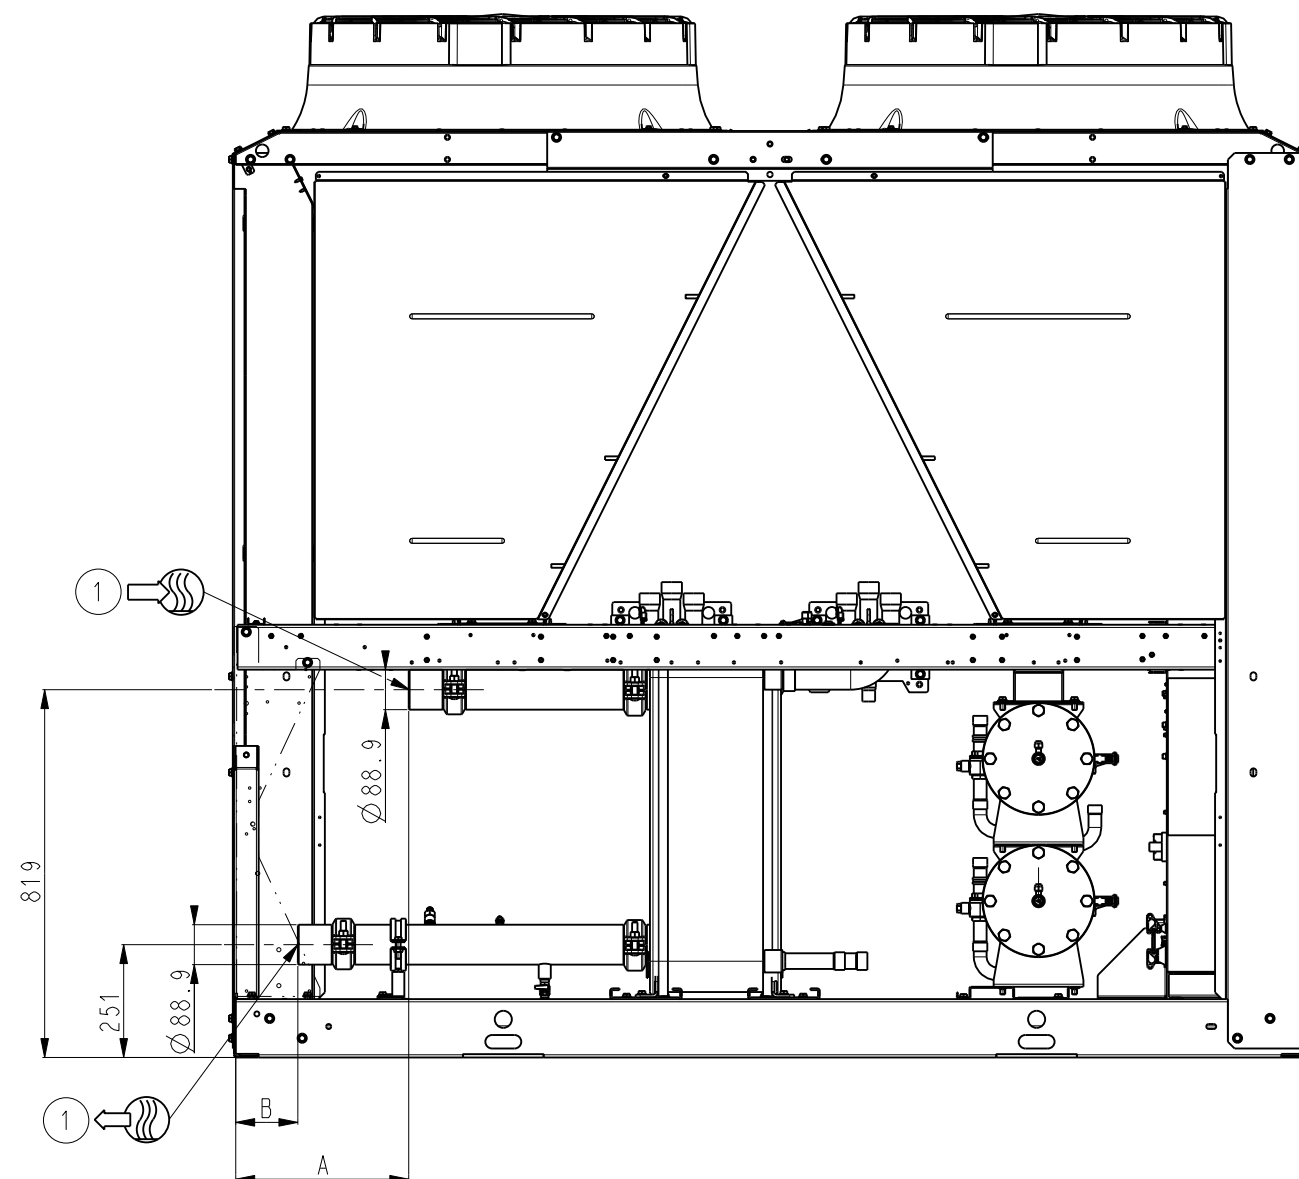

SIZE	A (mm)	B (mm)
165-180R	440	193
210R	440	193
230R	389	142
270R	389	142

