

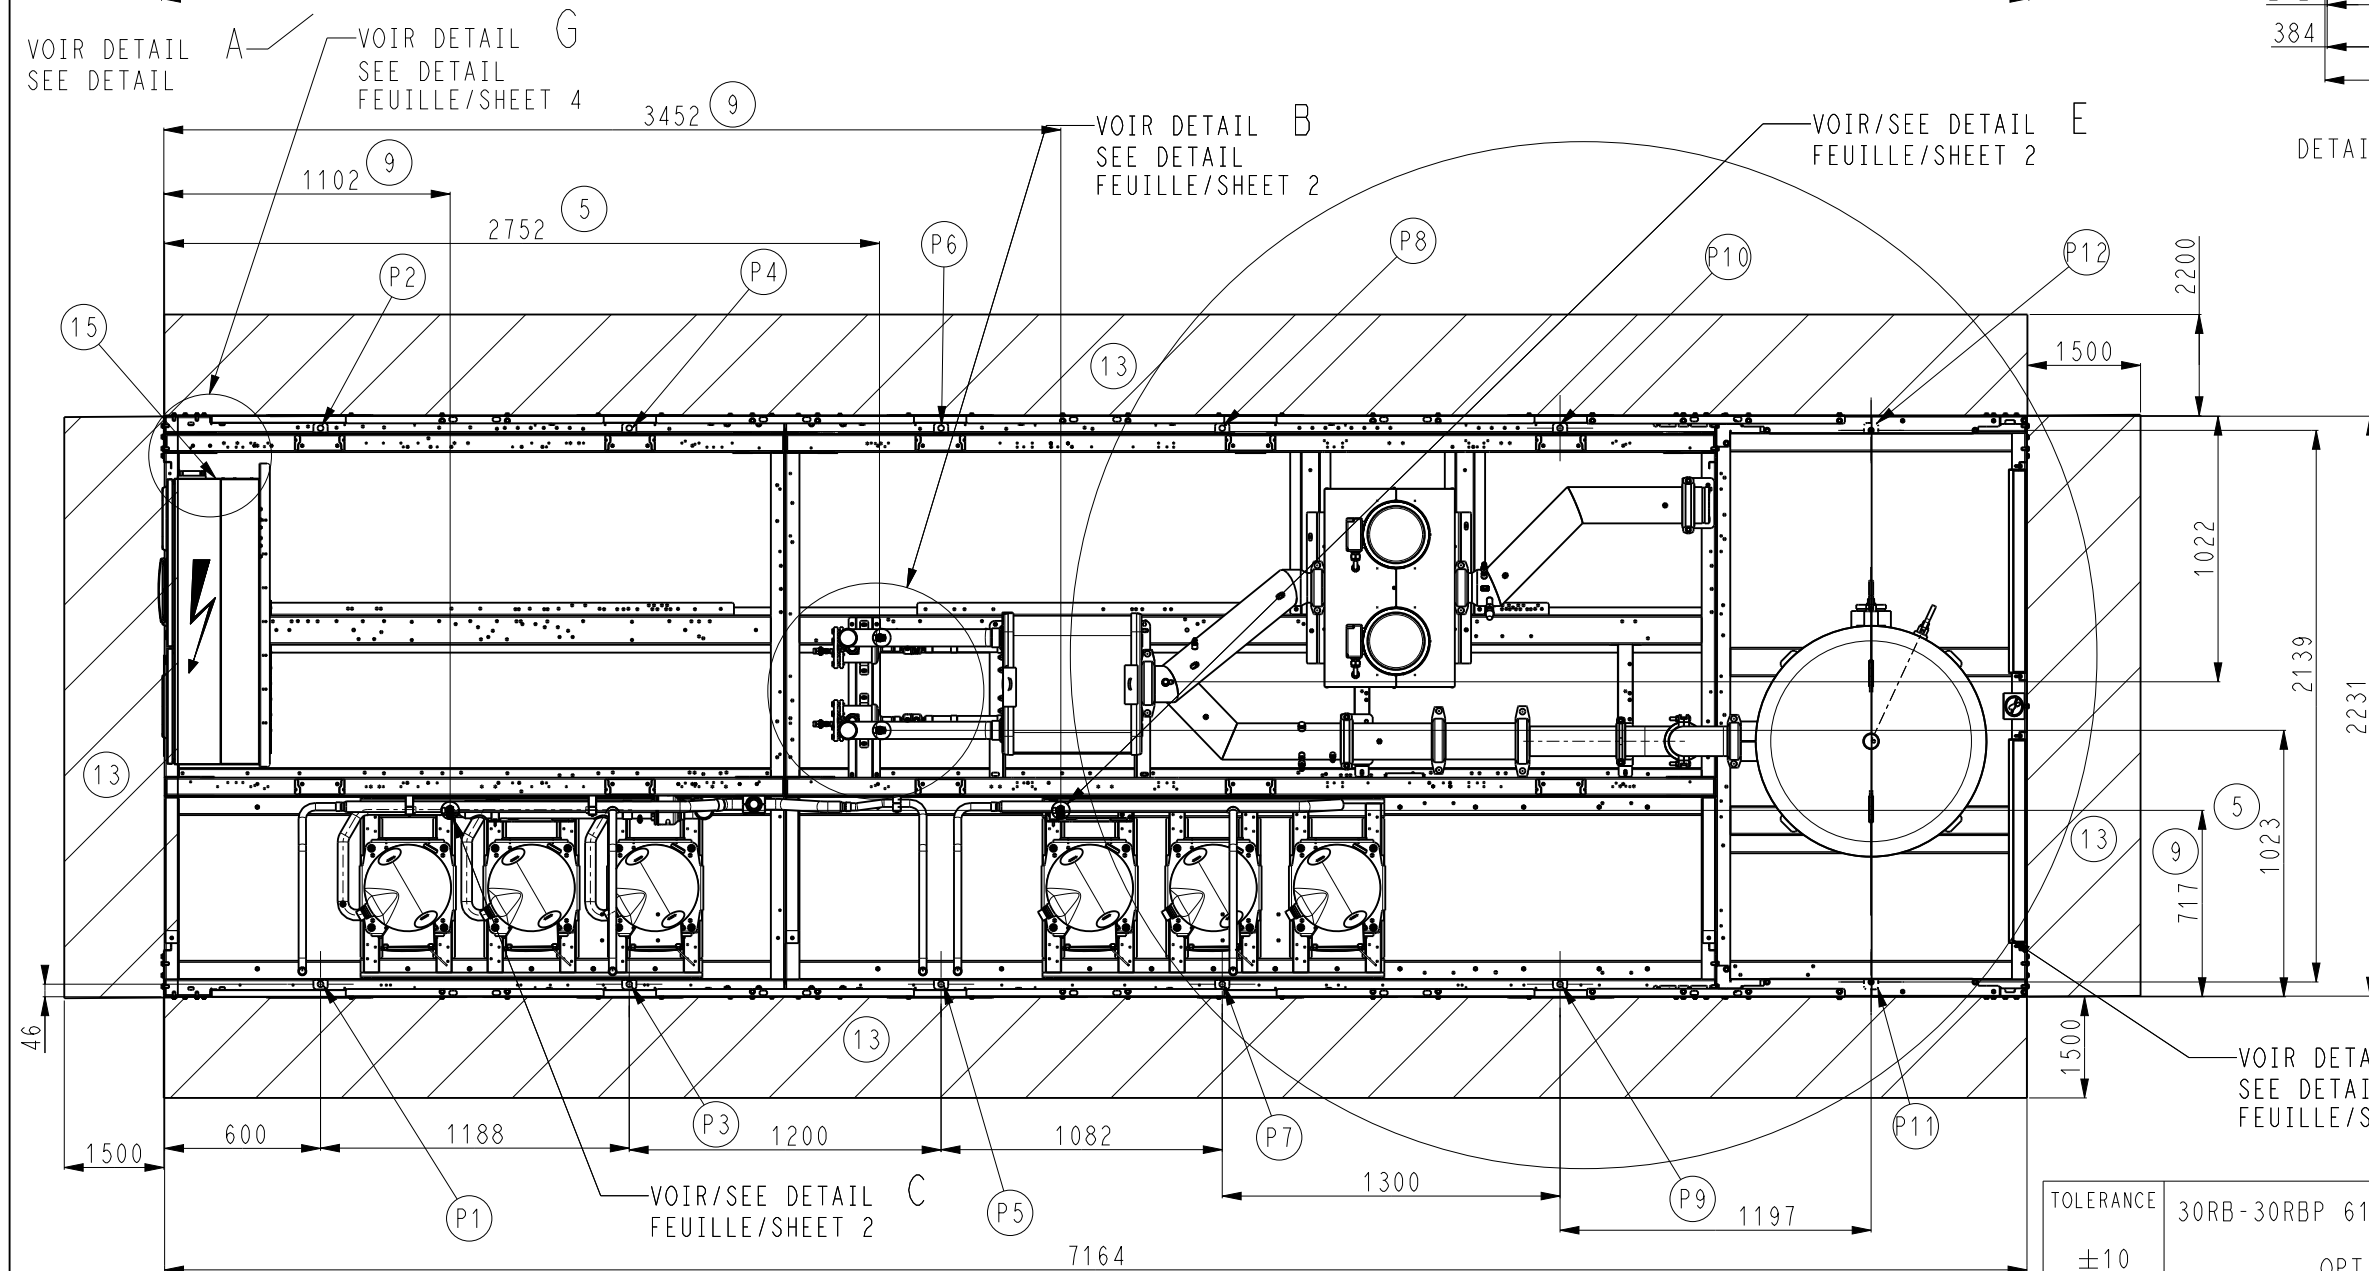
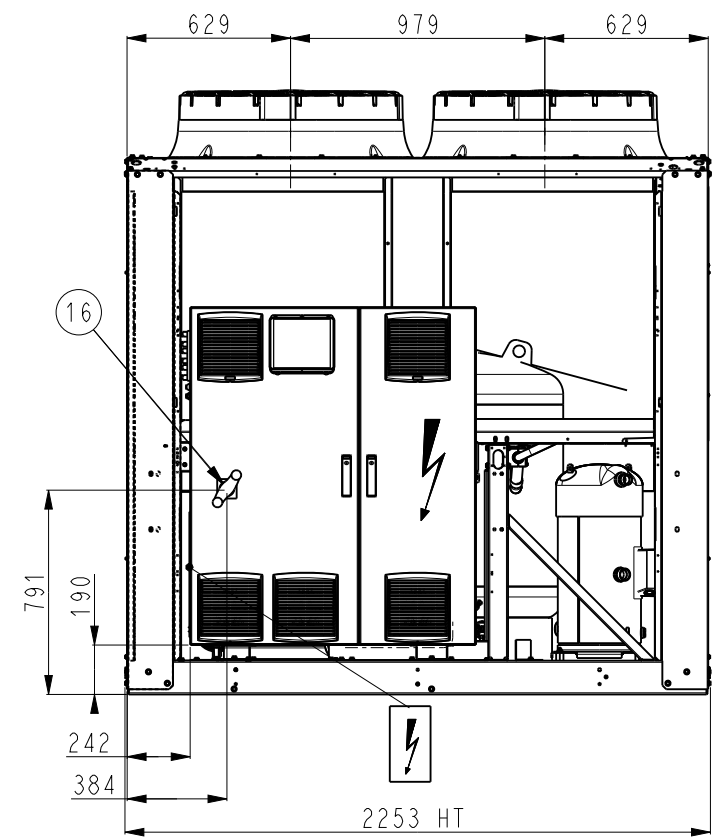
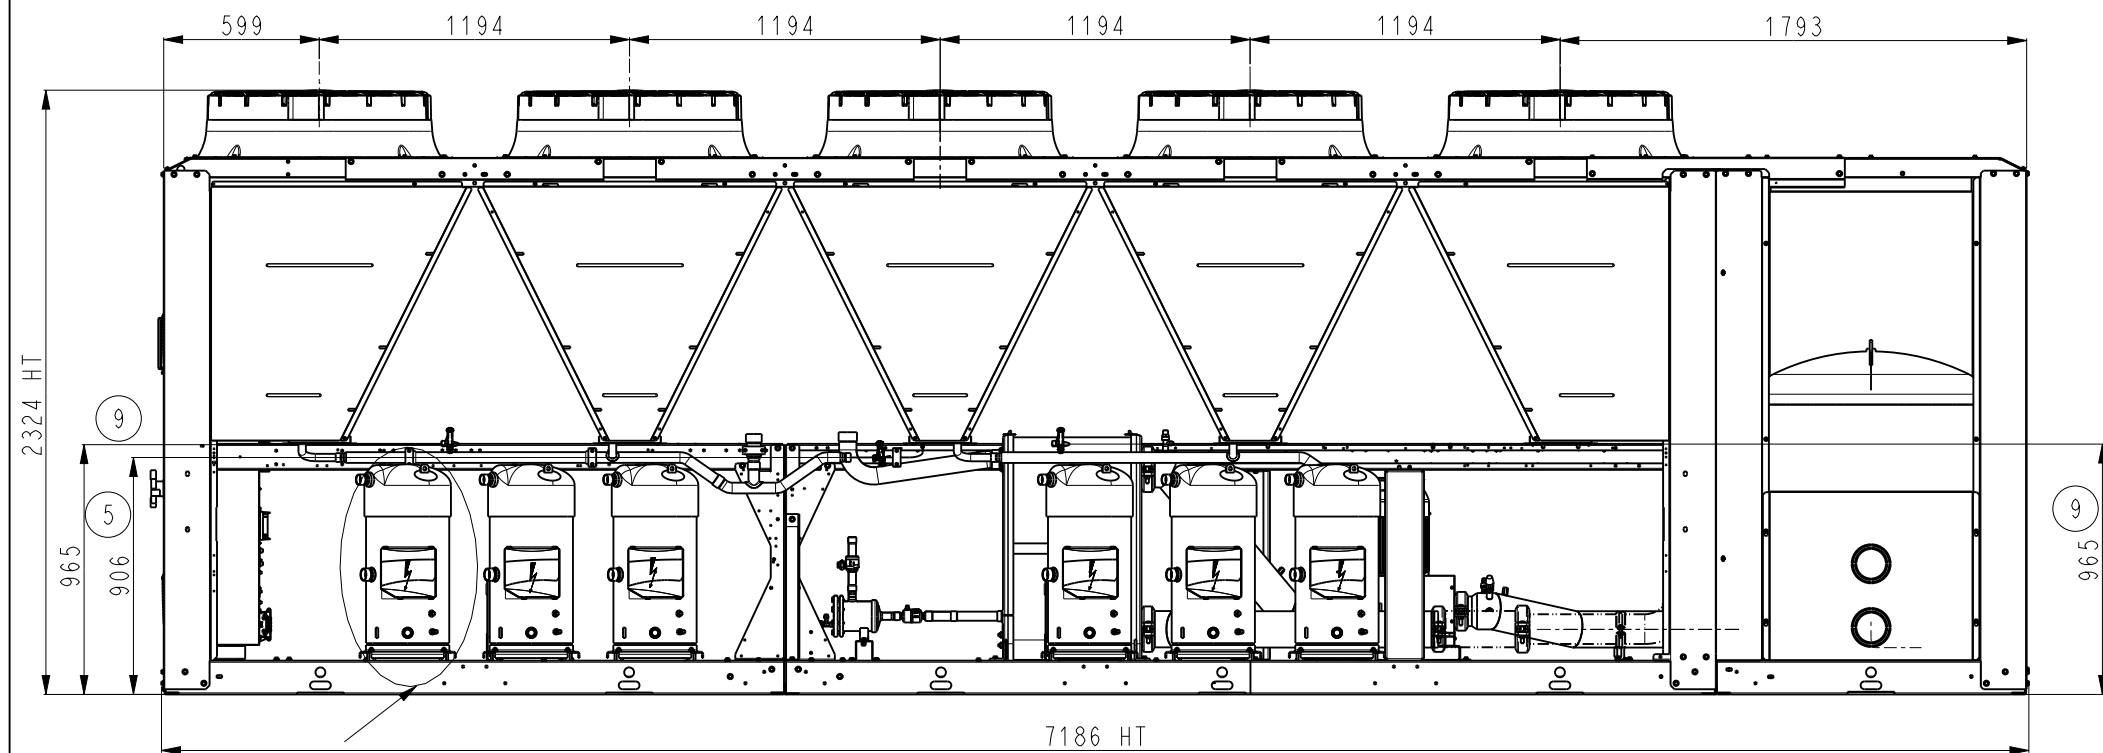


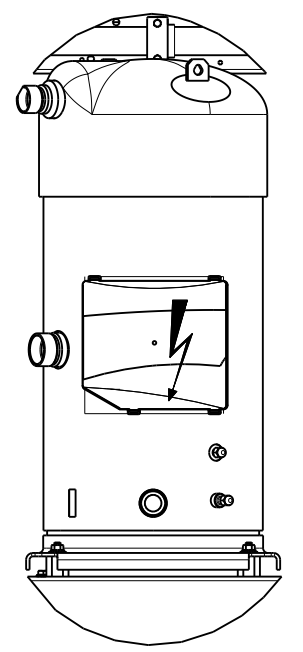

DETAIL SOUPAPE ⑤ & ⑨

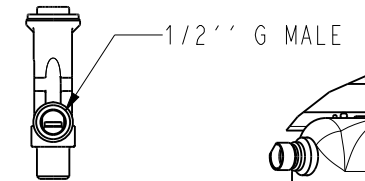


ECHELLE 29:320

VOIR DETAIL D
SEE DETAIL
FEUILLE/SHEET 2


TOLERANCE	30RB-30RBP 610R-----> 720R
±10	OPT 307

Carrier	DATE	Feuille
	19-Sep-22	Sheet
00DCG000378700		1/6
		Indice
		F

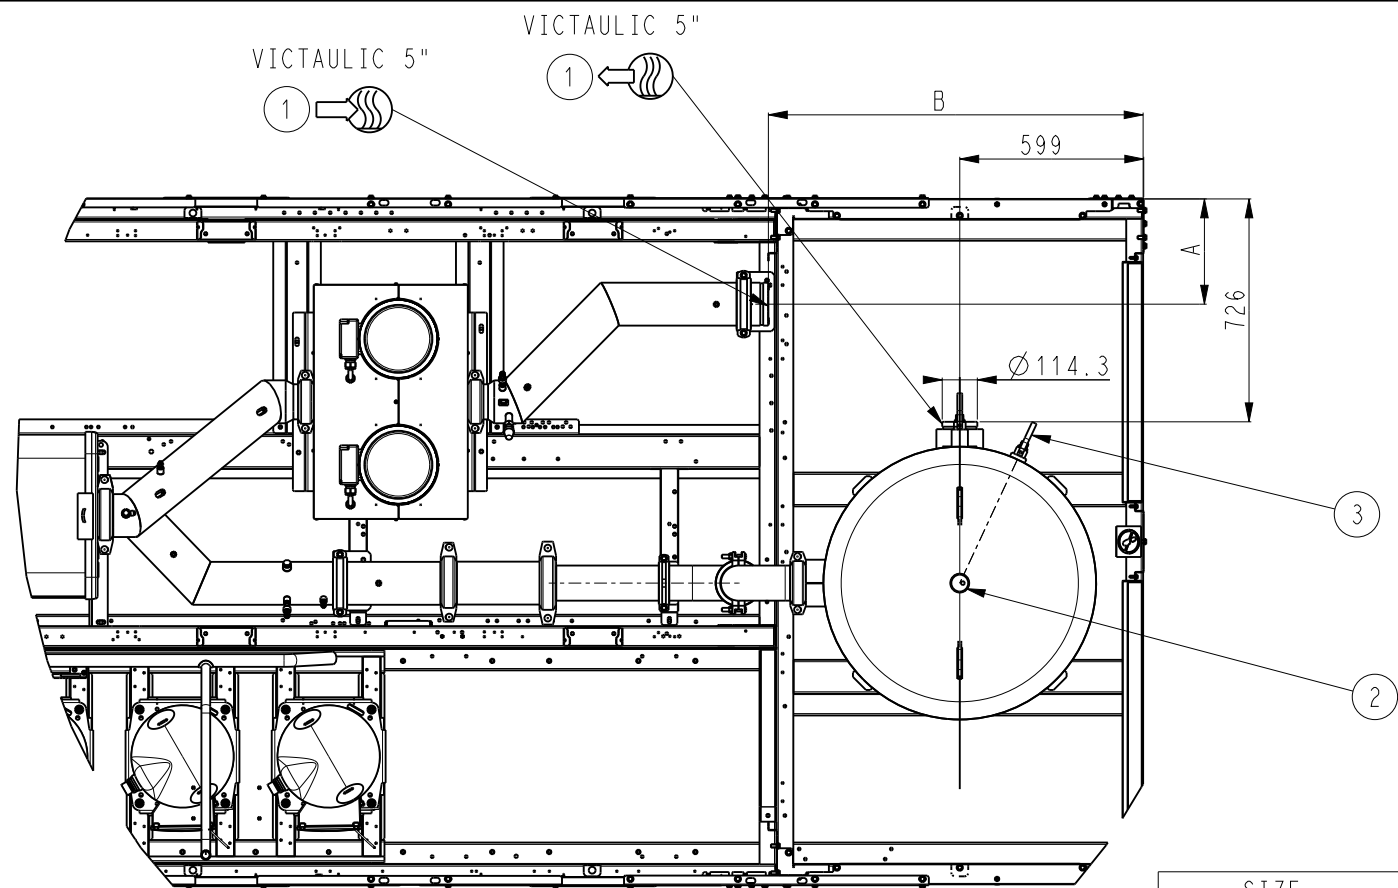

DETAIL D
ECHELLE 13:320



SIZE	OPTION	A (mm)	B (mm)
610R-670R-720R	116V	416	1551
	116W	343	1220

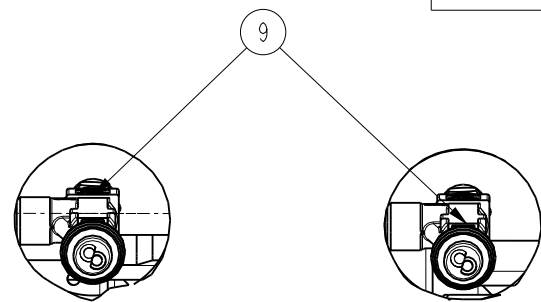


DETAIL C
ECHELLE 3:10


DETAIL E
ECHELLE 3:10

TAILLE 610R
SIZE 610R

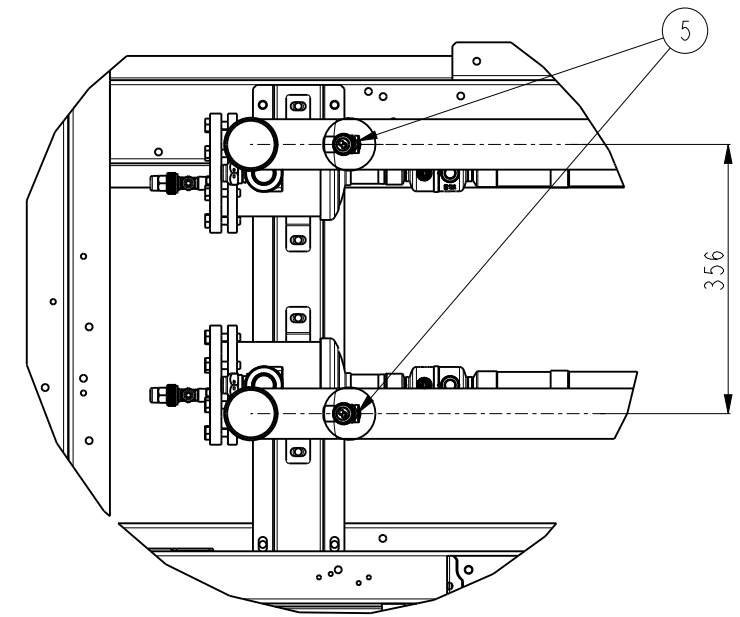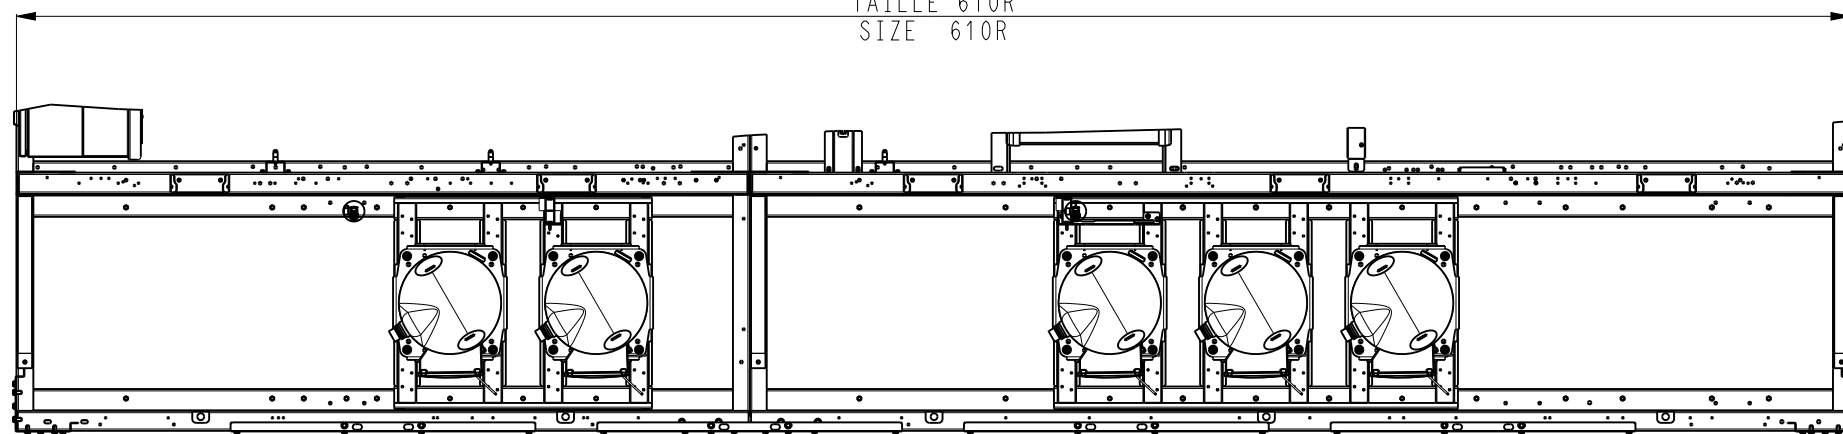



DETAIL B
ECHELLE 1:10

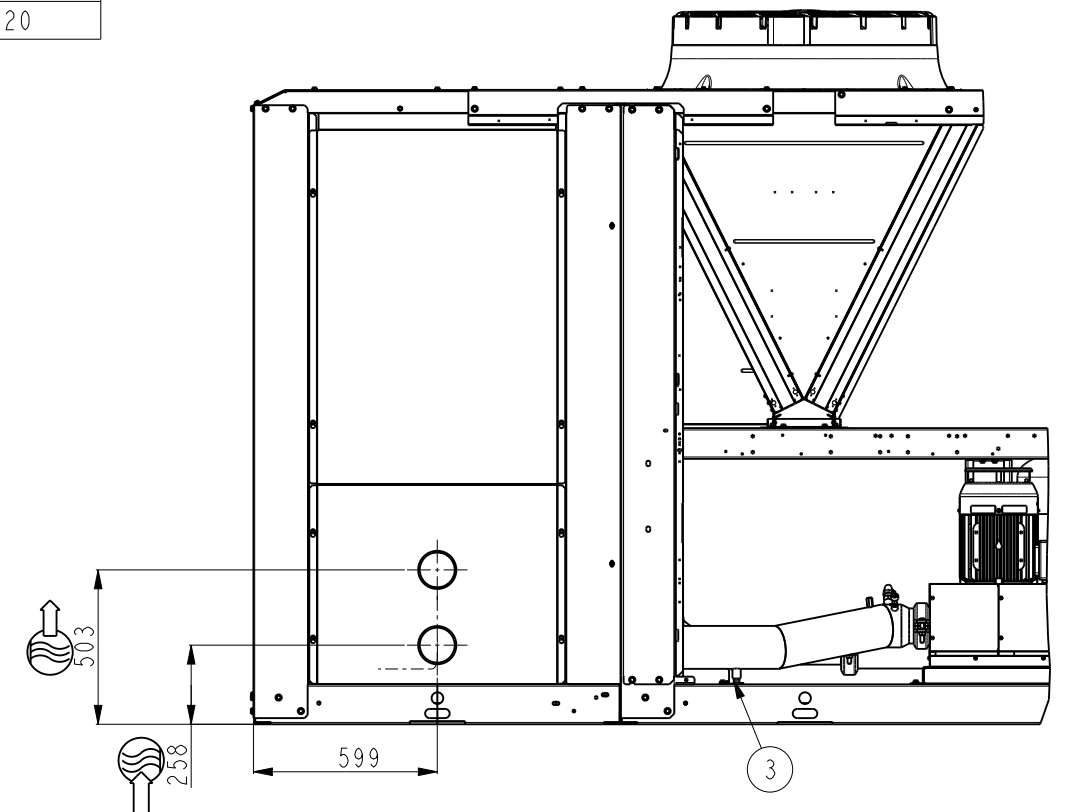

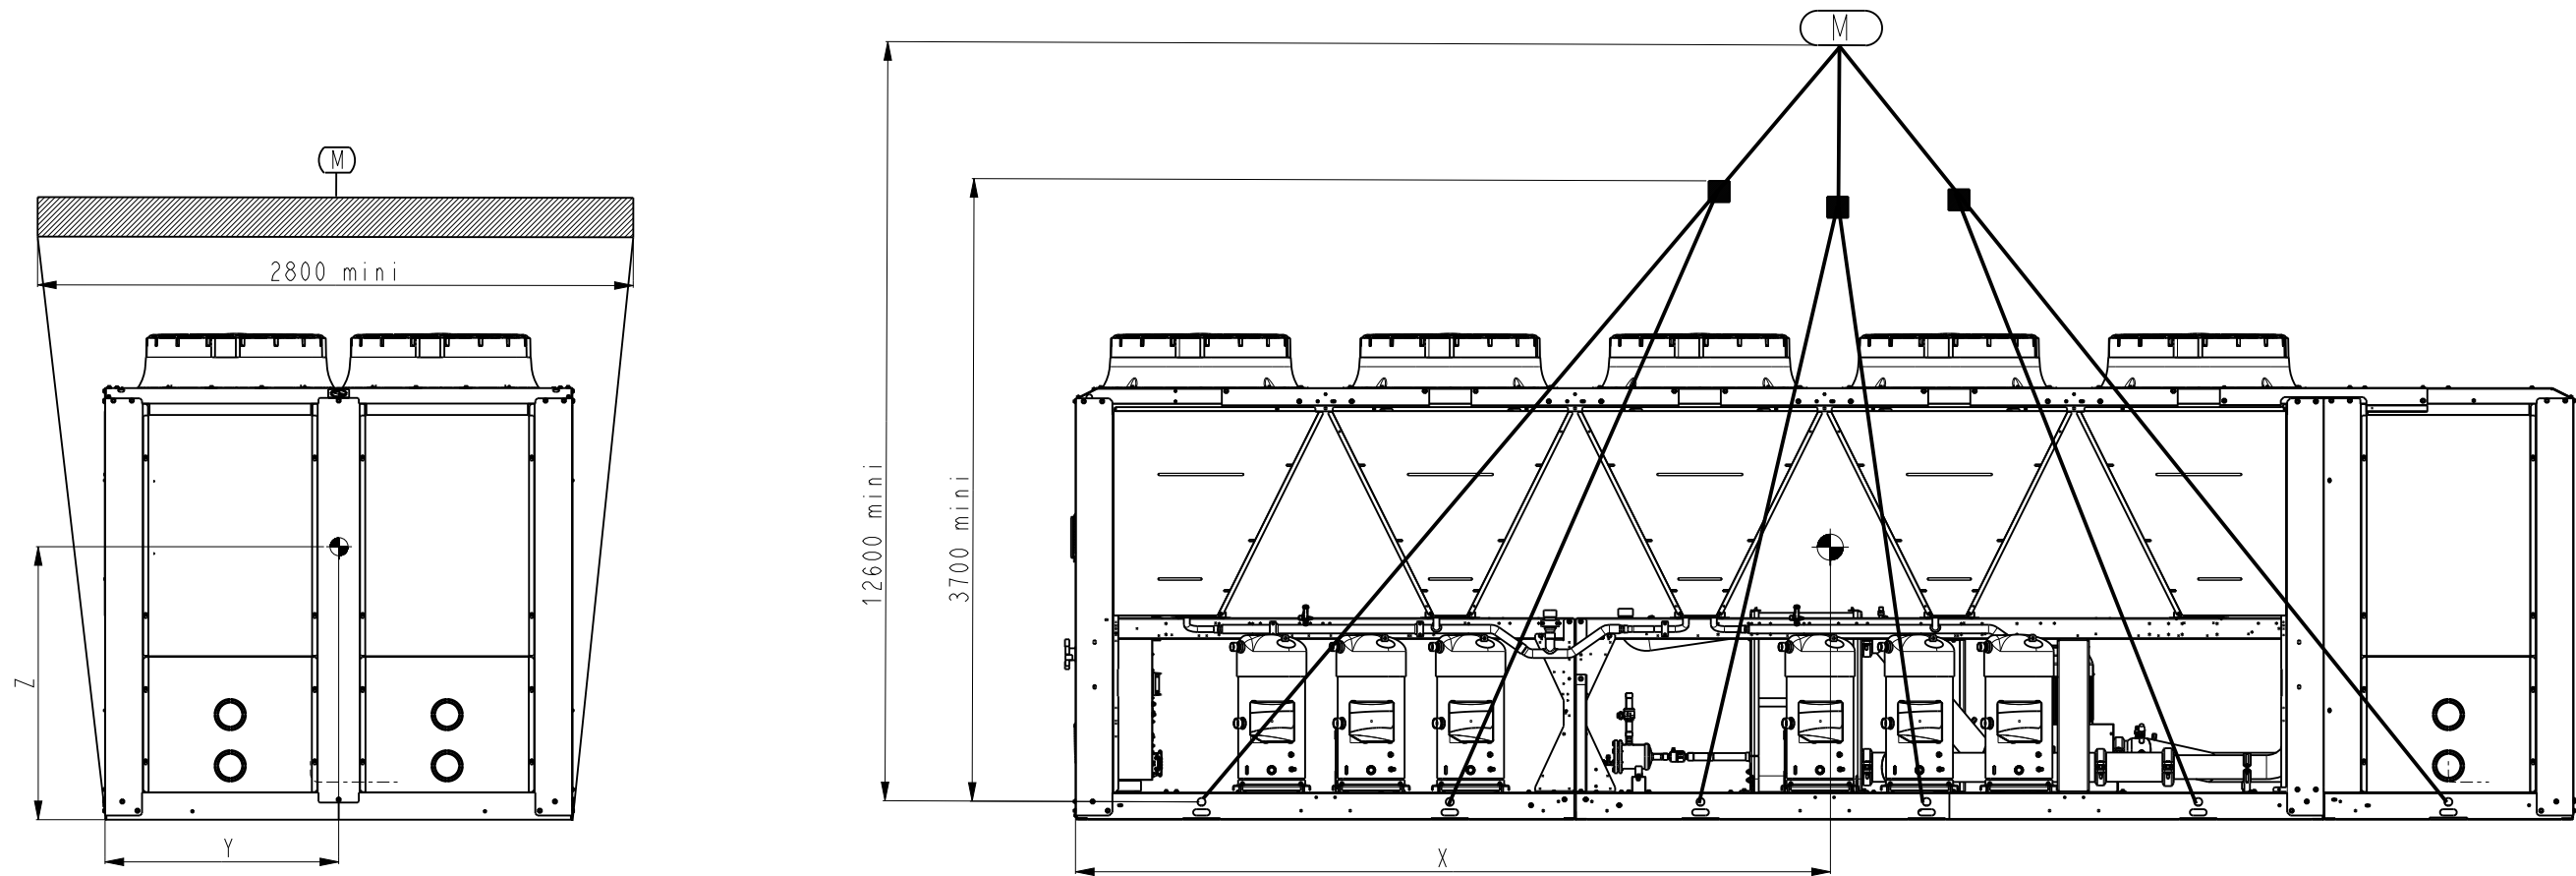


X (mm)	Y (mm)	Z (mm)
3661±65	1000±15	834±5

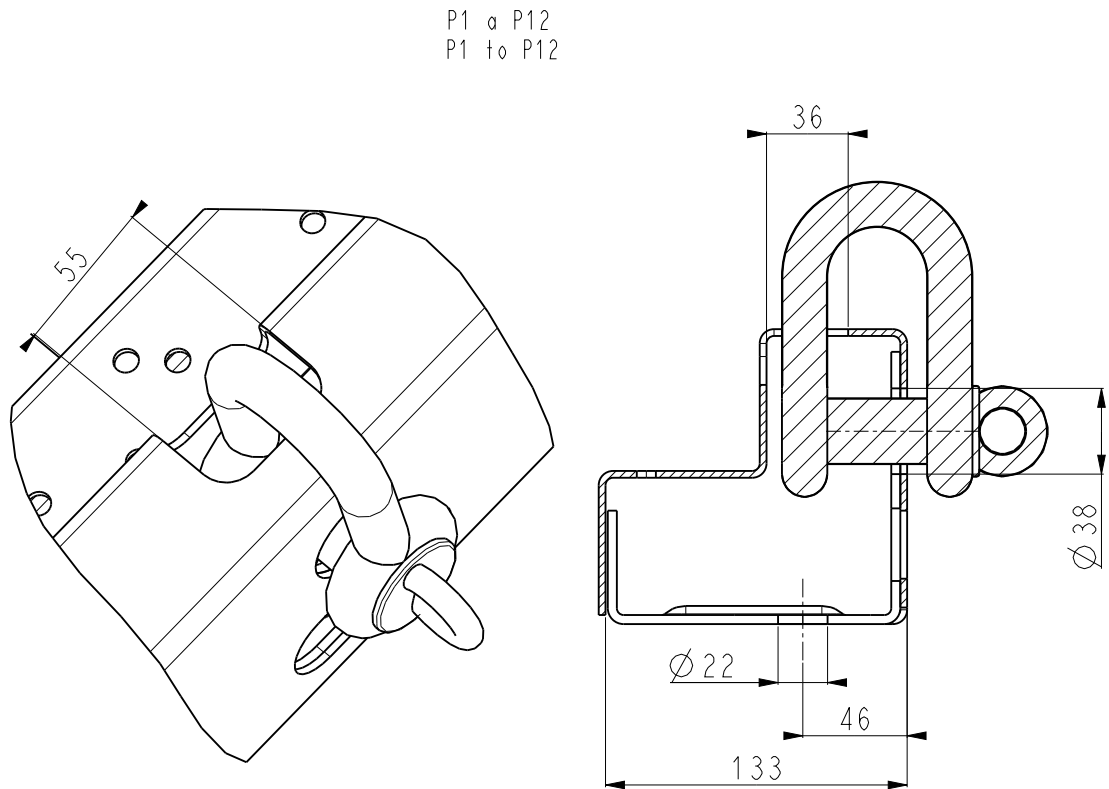

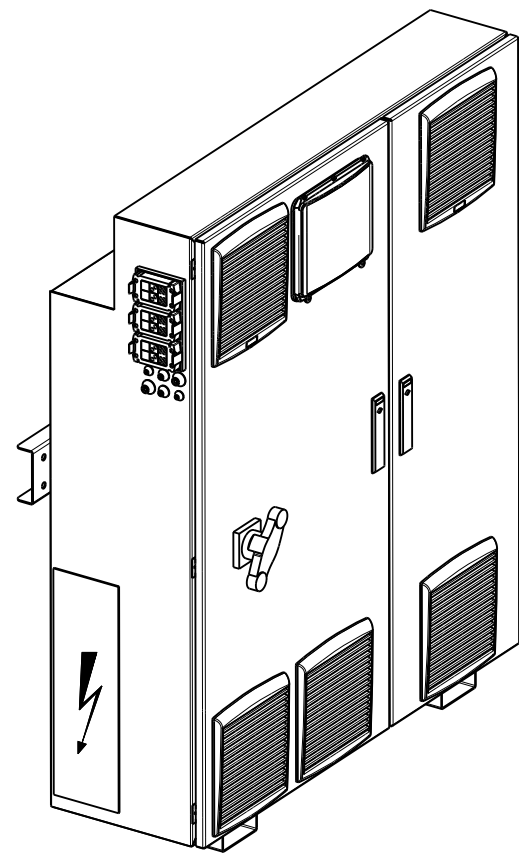

ECHELLE 11:160


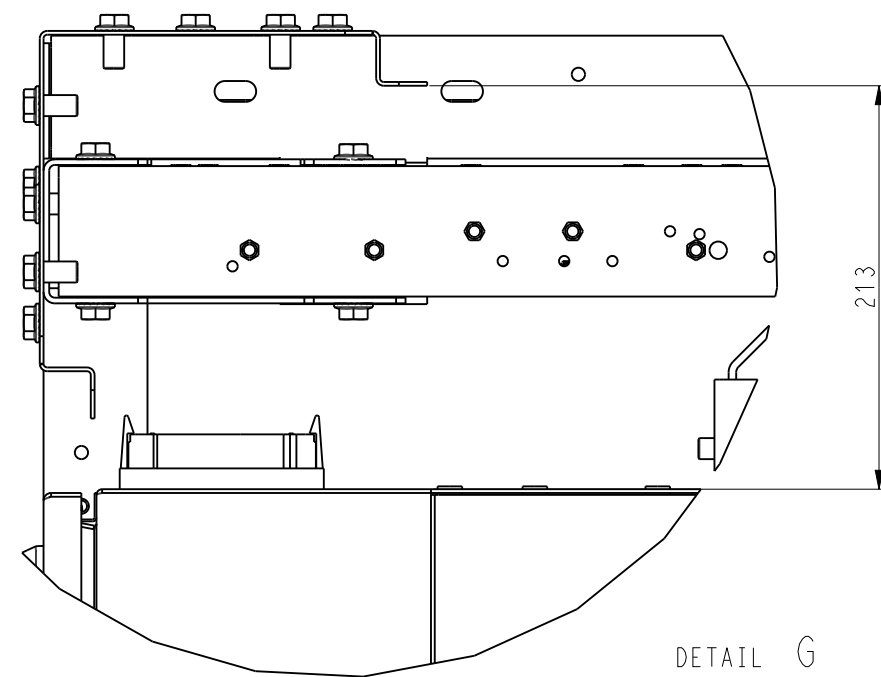


DETAIL G
ECHELLE 1:4

STANDARD



3 TROUS Ø11.0
HOLES

2x PE CLIENT FILETE M8
PE CUSTOMER THREADED M8

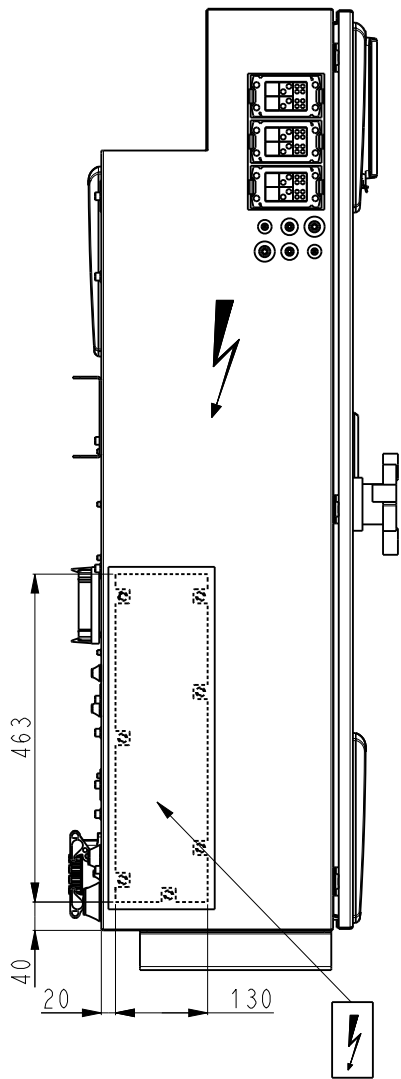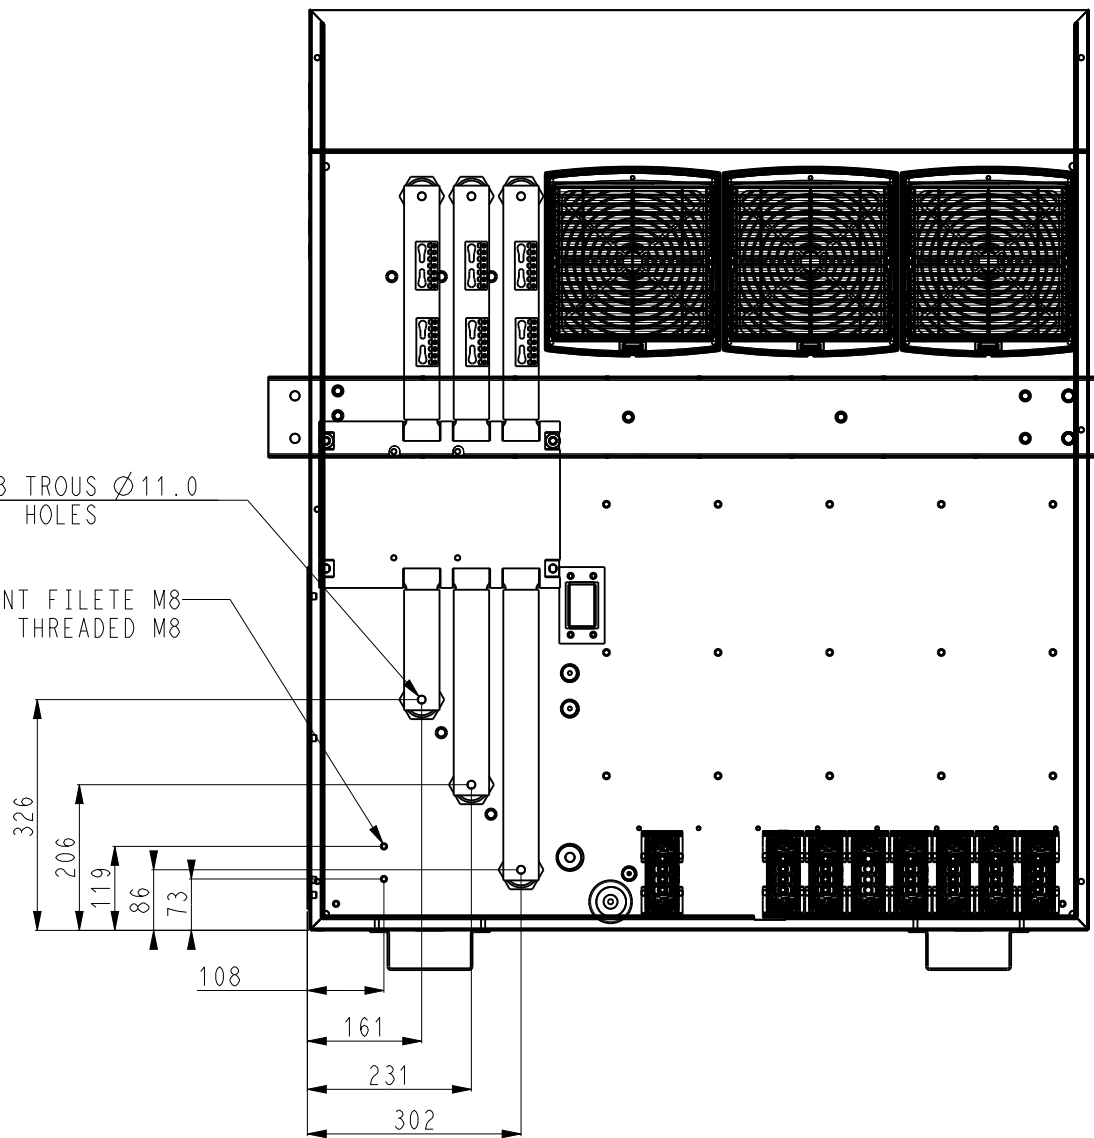

TOLERANCE ±10	30RB-30RBP 610R-----> 720R OPT 307	 00DCG000378700	DATE 19-Sep-22	Feuille Sheet 4/6 Indice F

OPT 266

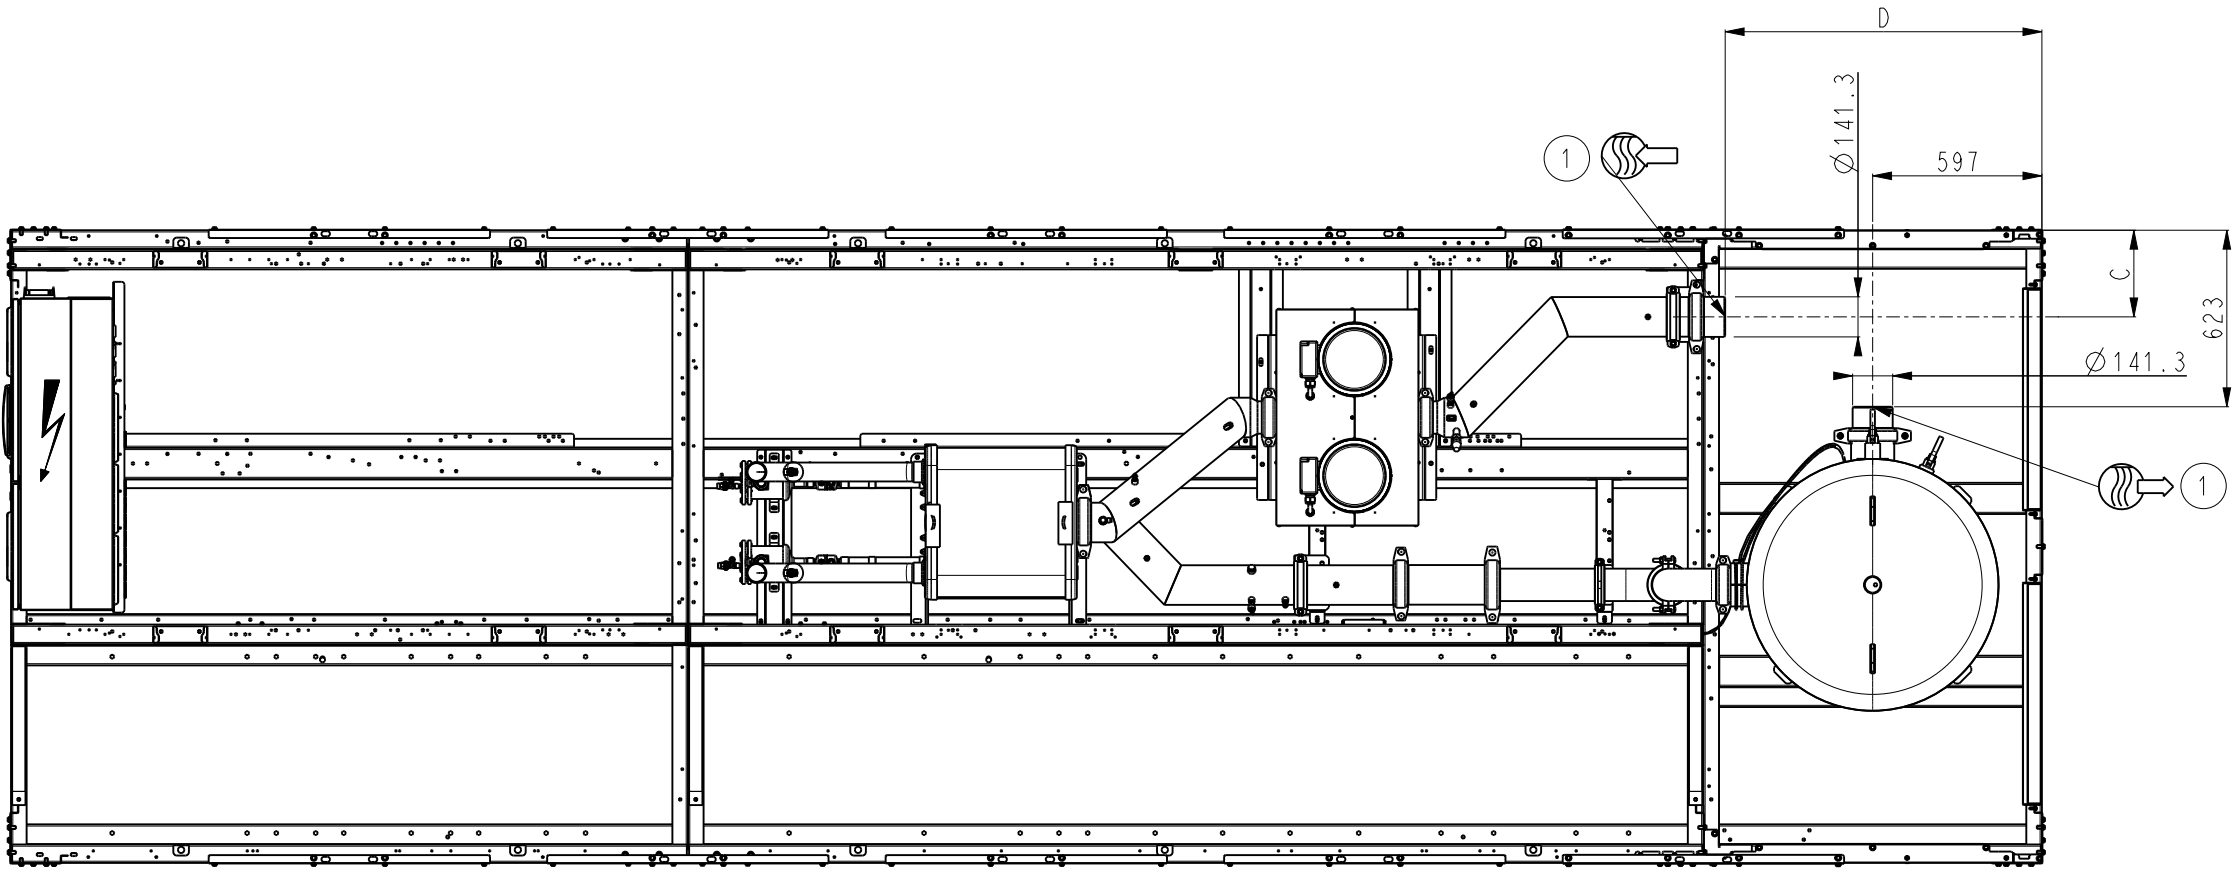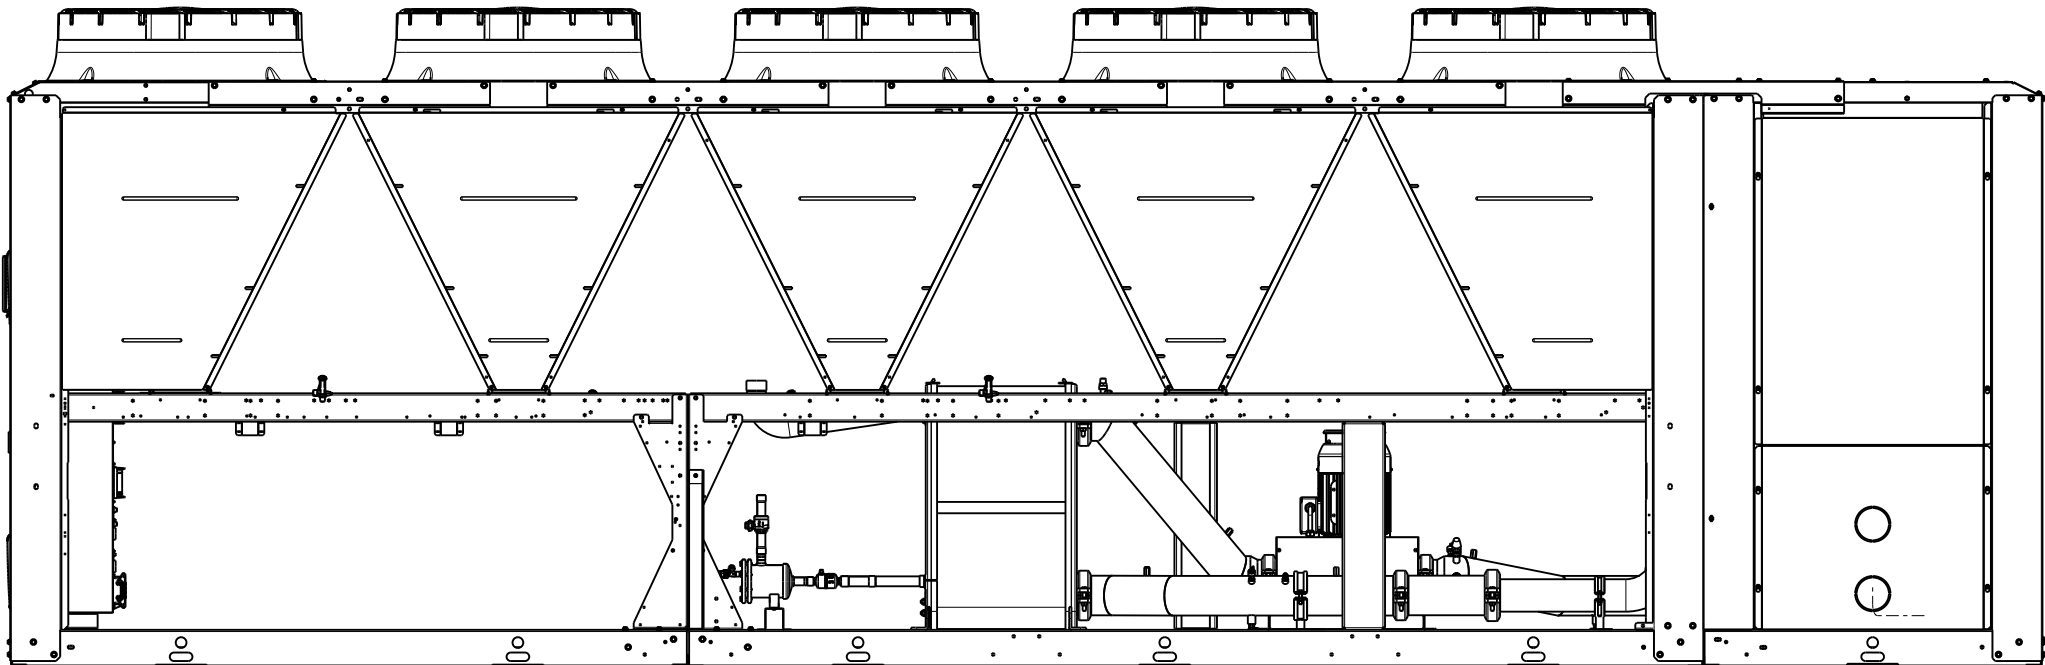

SIZE	OPTION	C (mm)	D (mm)
610R-670R-720R	116V	416	1447
	116W	343	1120

