



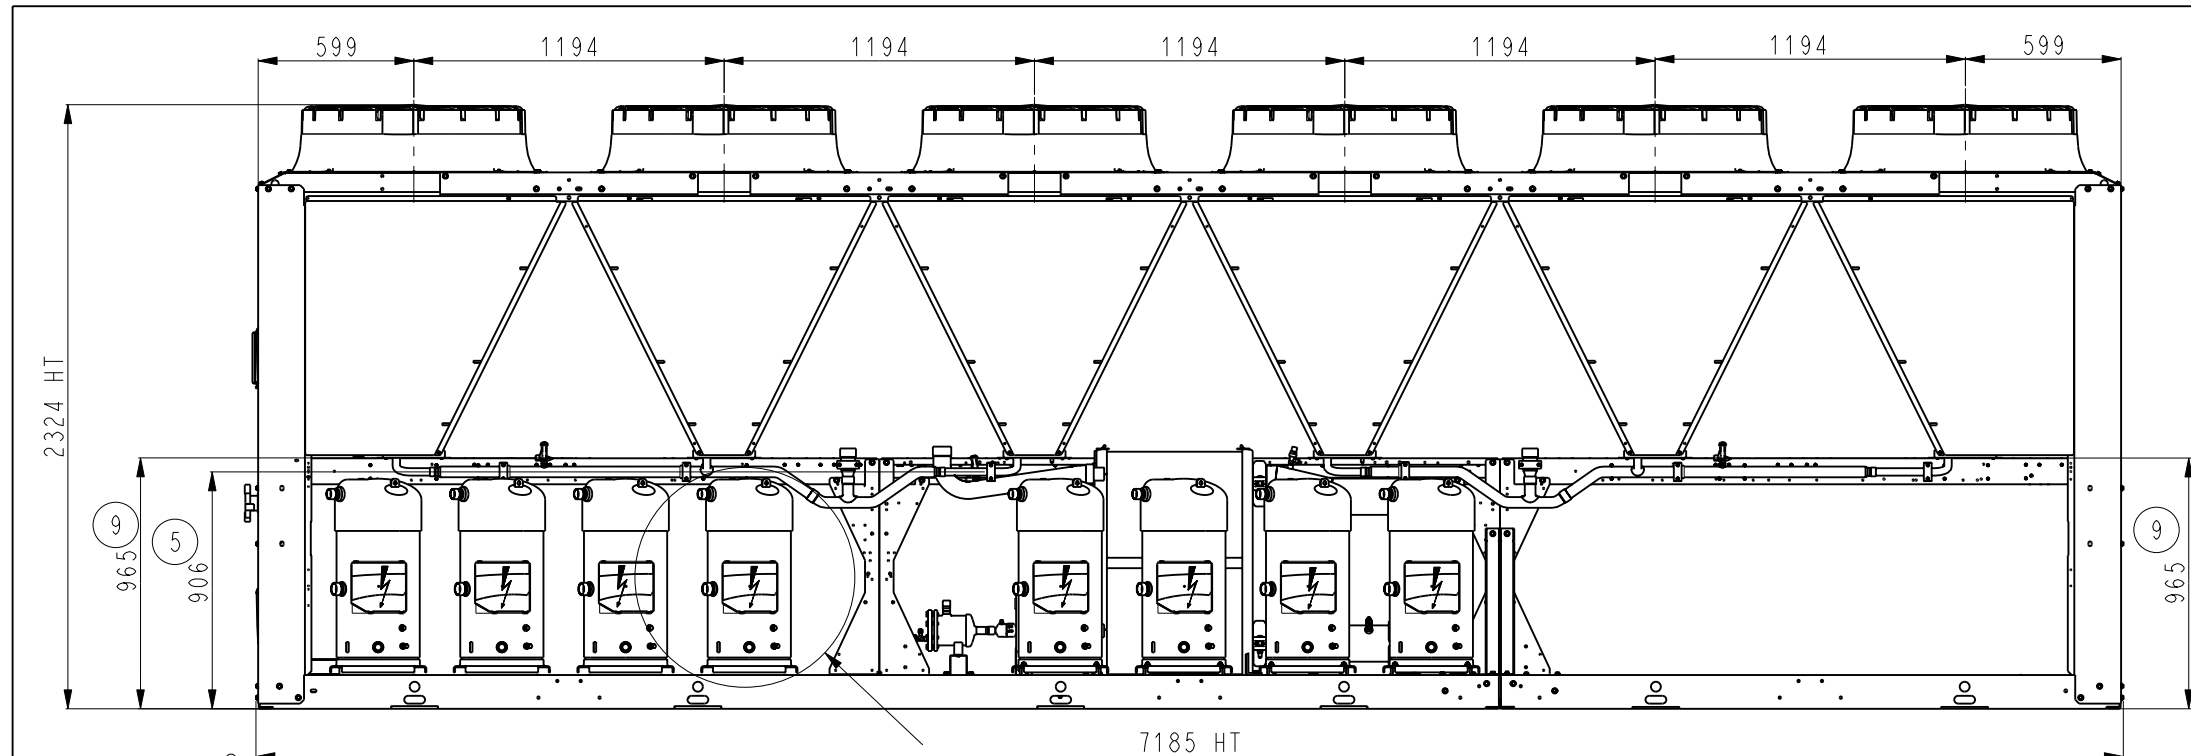

VOIR DETAIL G
SEE DETAIL
FEUILLE/SHEET 4



VOIR DETAIL A
SEE DETAIL
5633

VOIR DETAIL B
SEE DETAIL
FEUILLE/SHEET 2

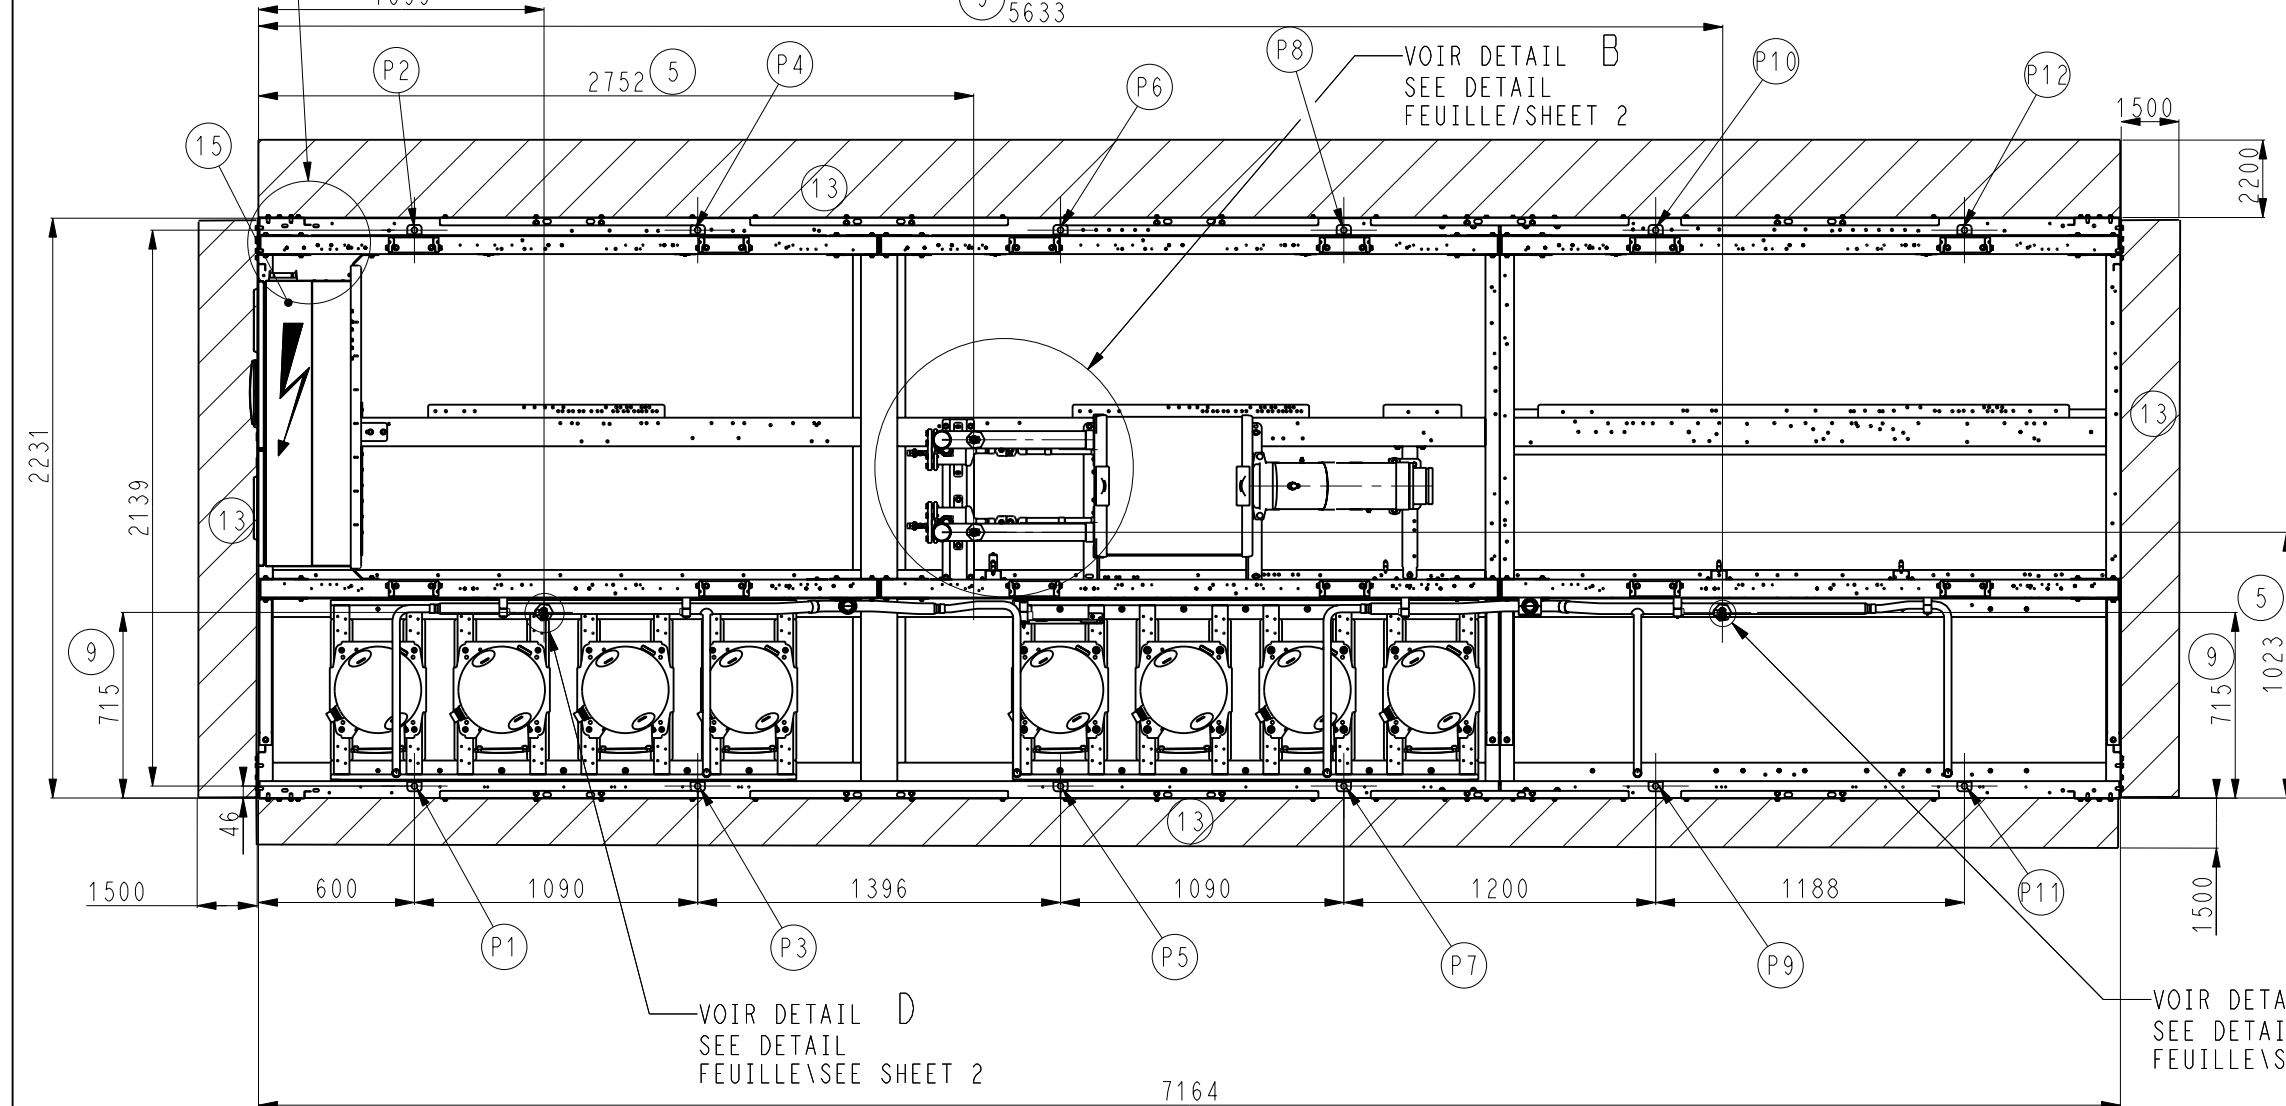

VOIR DETAIL D
SEE DETAIL
FEUILLE/SEE SHEET 2


VOIR DETAIL E
SEE DETAIL
FEUILLE/SEE SHEET 2

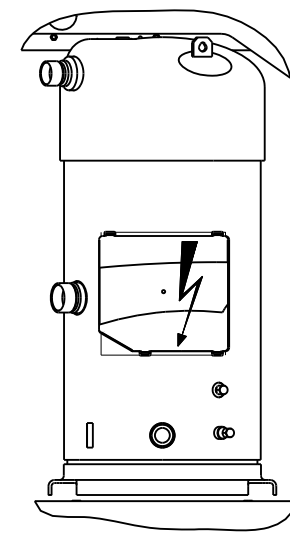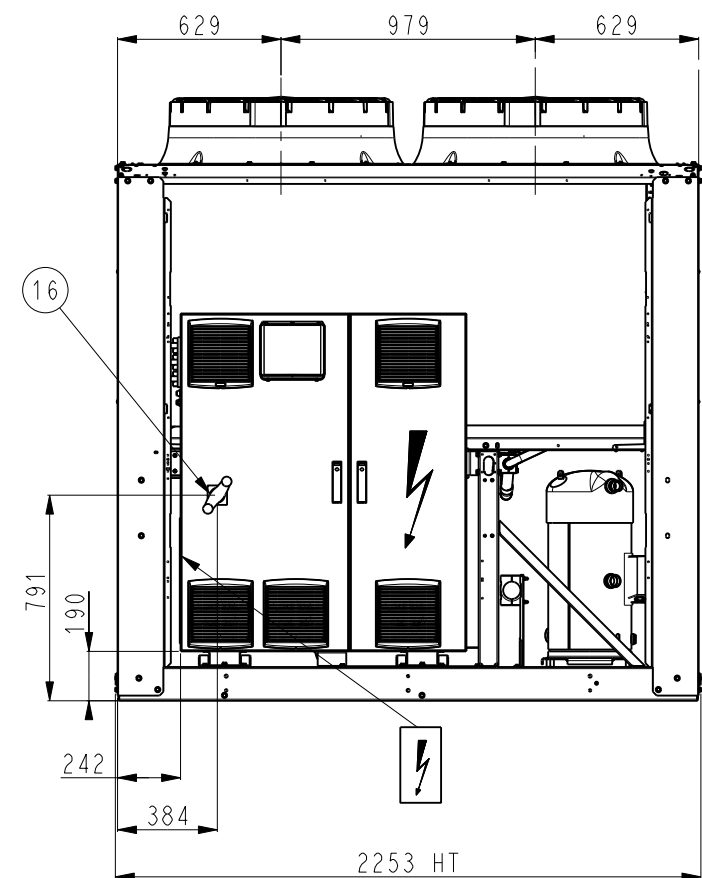


DETAIL A
ECHELLE 13:160

TOLERANCE	30RB-30RBP 770R-----> 950R
±10	

	DATE	Feuille
	29-Aug-22	Sheet 1/6
00DCG000378800		Indice E

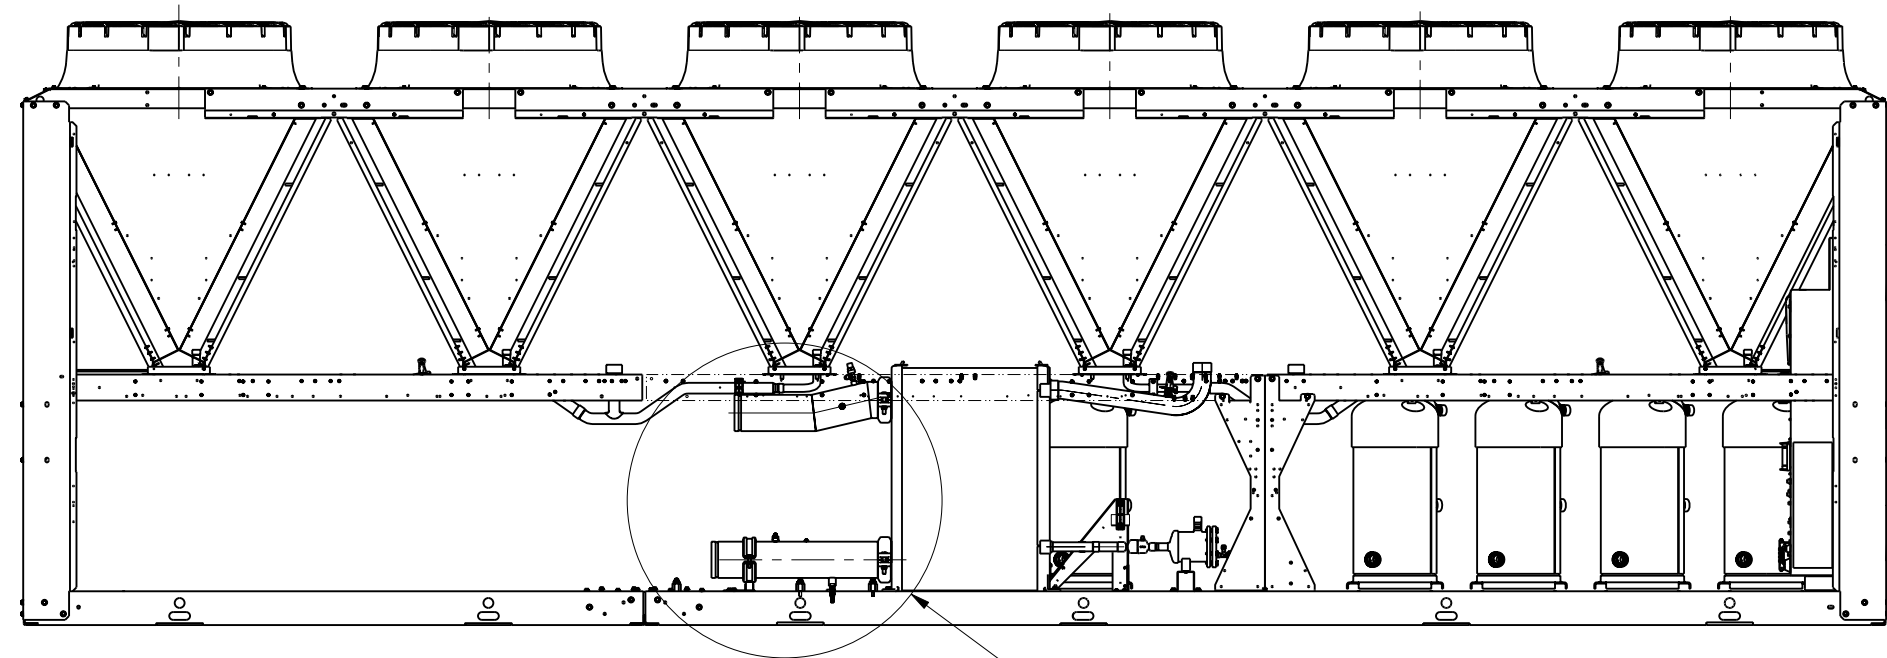


VOIR DETAIL C
SEE DETAIL

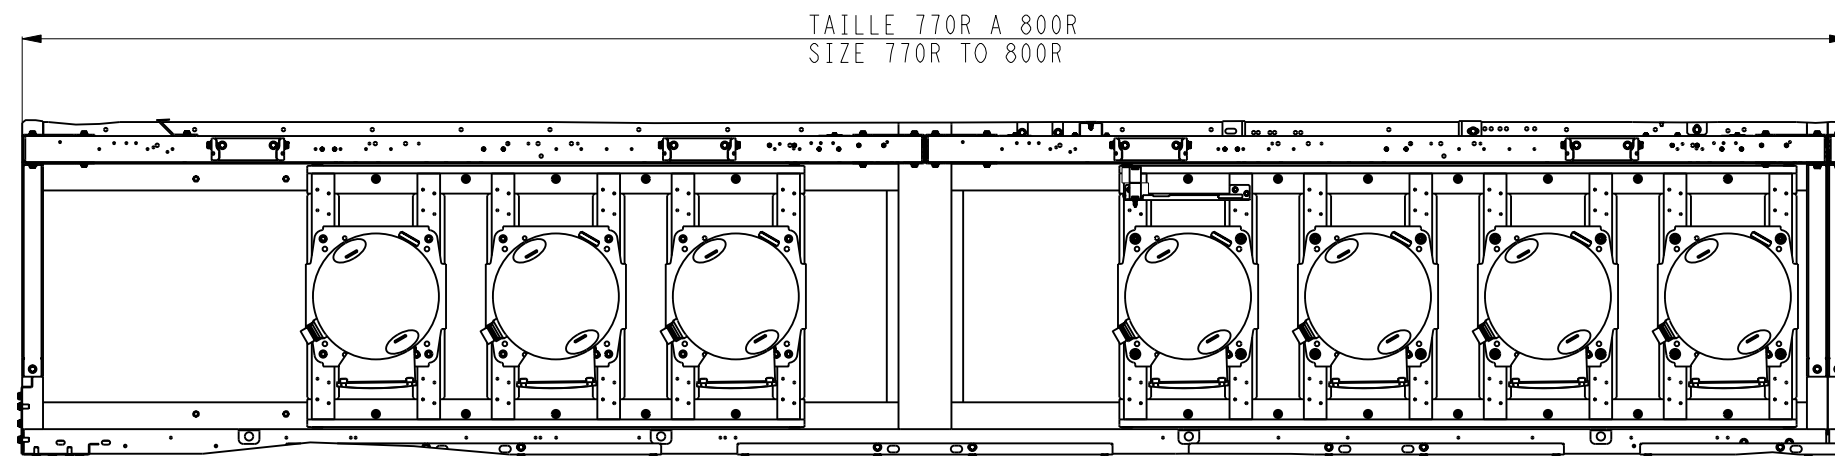


TAILLE 770R A 800R
SIZE 770R TO 800R


DETAIL SOUPAPE ⑤ & ⑨




1/2" G MALE

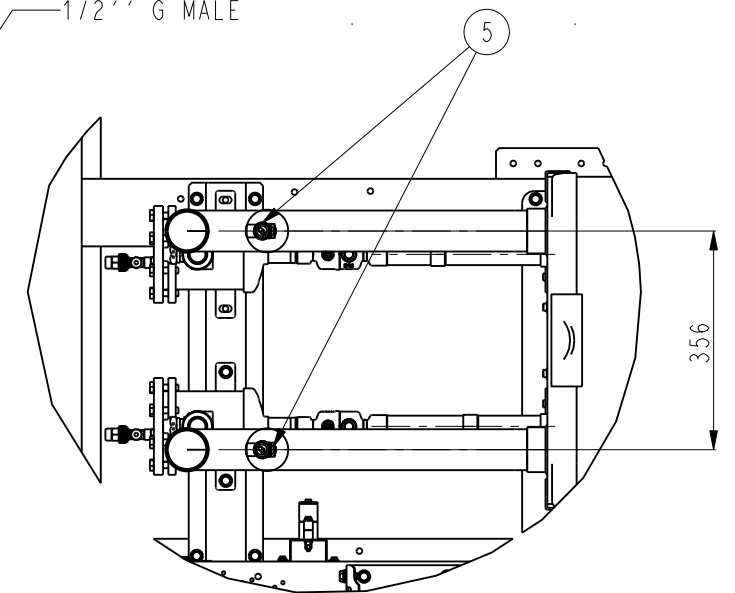

DETAIL B
ECHELLE 13:160





DETAIL D
ECHELLE 1:5



DETAIL E
ECHELLE 1:4




VICTAULIC 5"

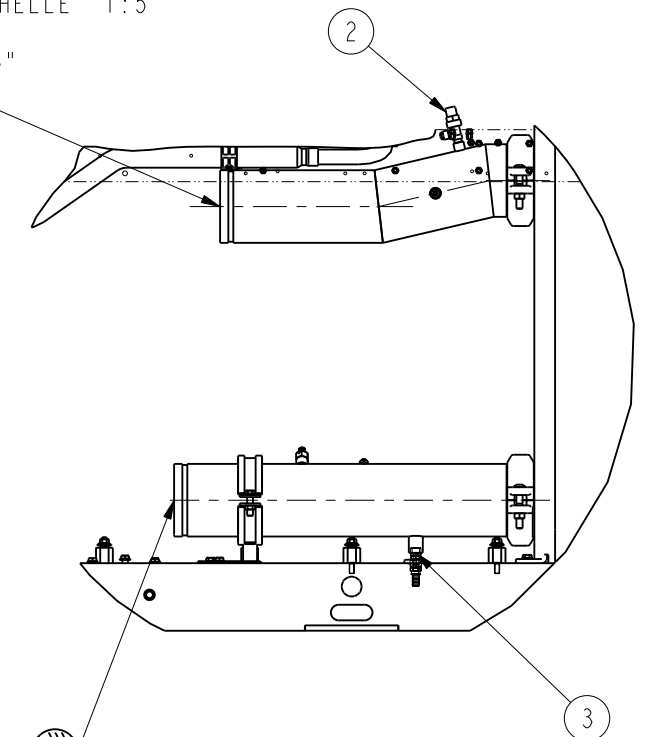


VICTAULIC 5"

DETAIL C
ECHELLE 11:160

TOLERANCE ±10	30RB-30RBP 770R-----> 950R		DATE	Feuille Sheet 2/6
			29-Aug-22	Indice
			00DCG000378800	E

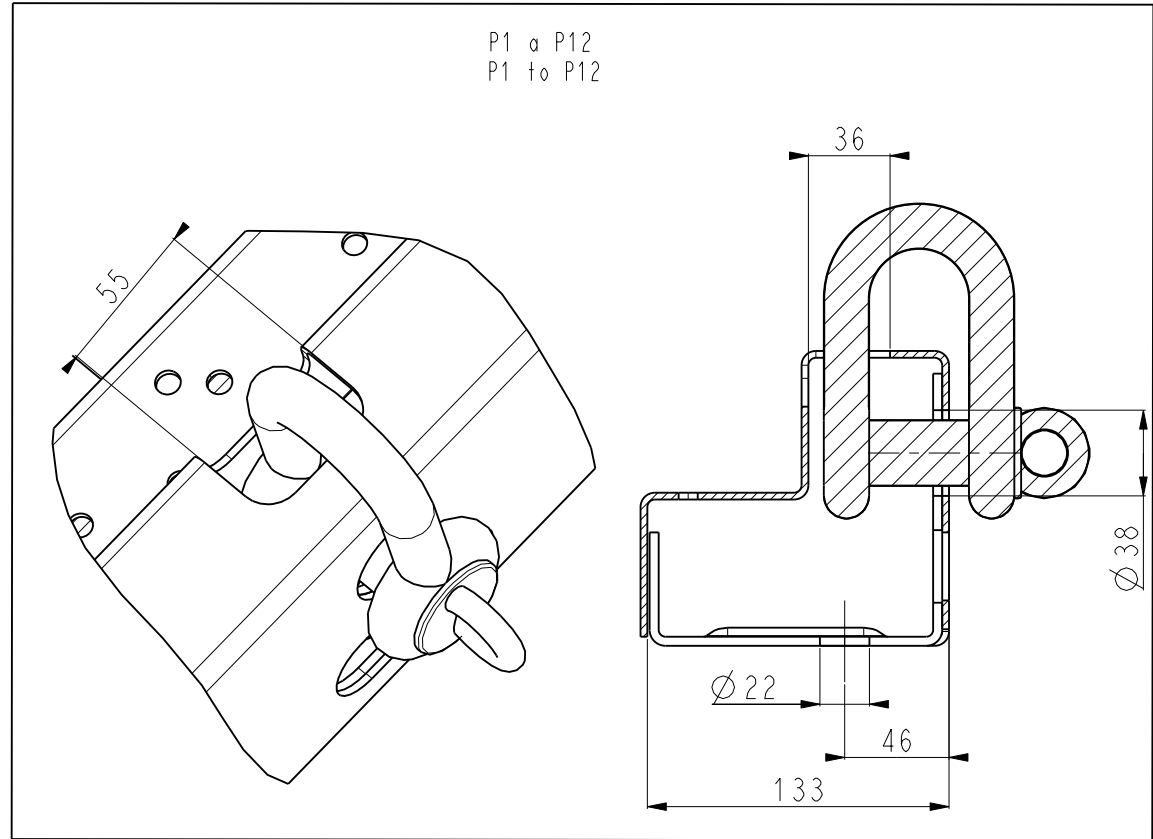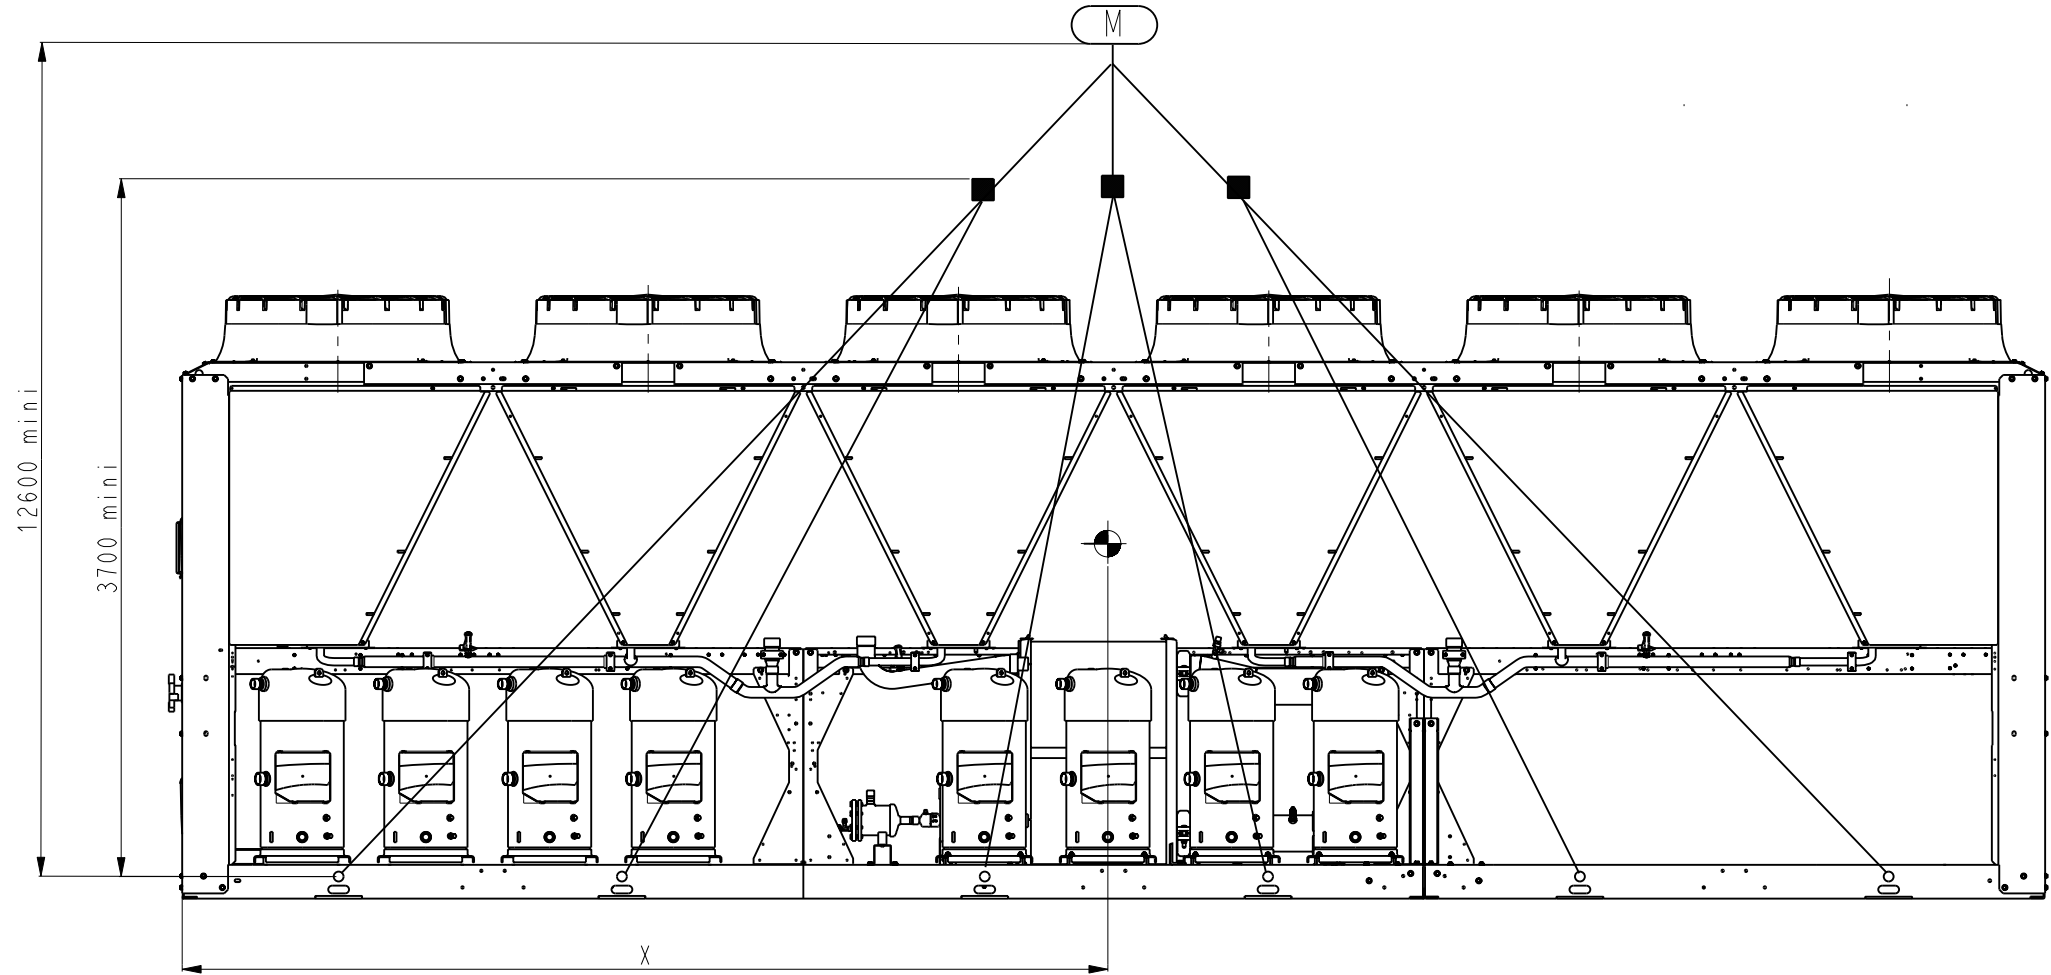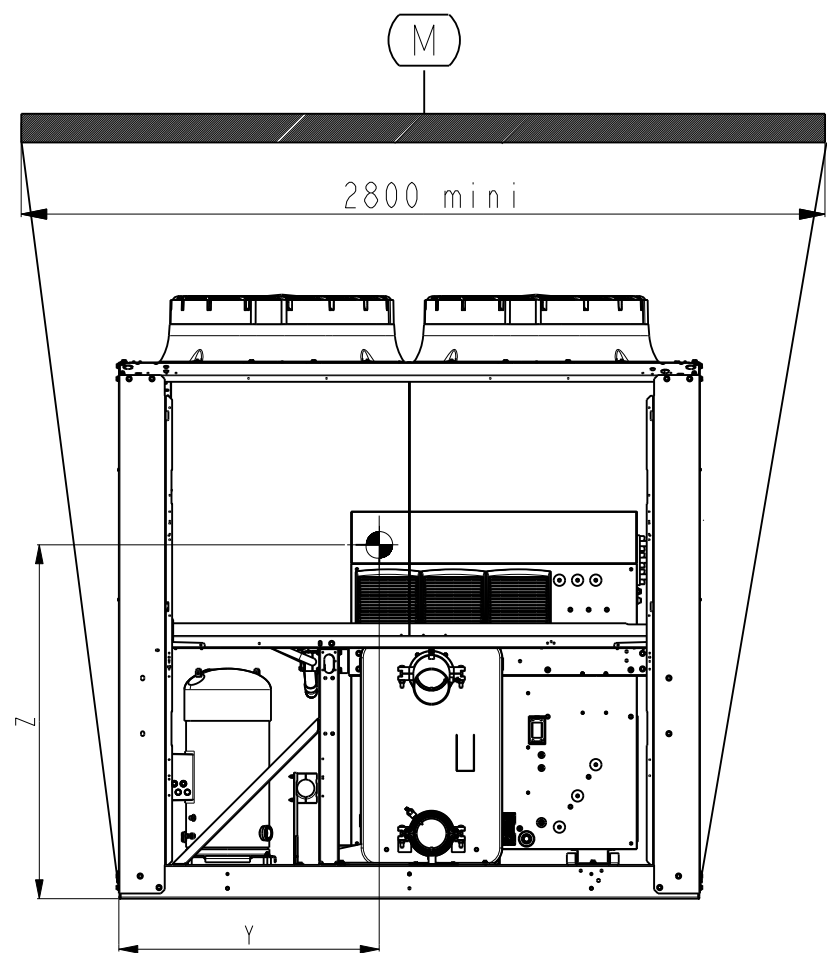


X (mm)	Y (mm)	Z (mm)
3050±150	879±45	930±35

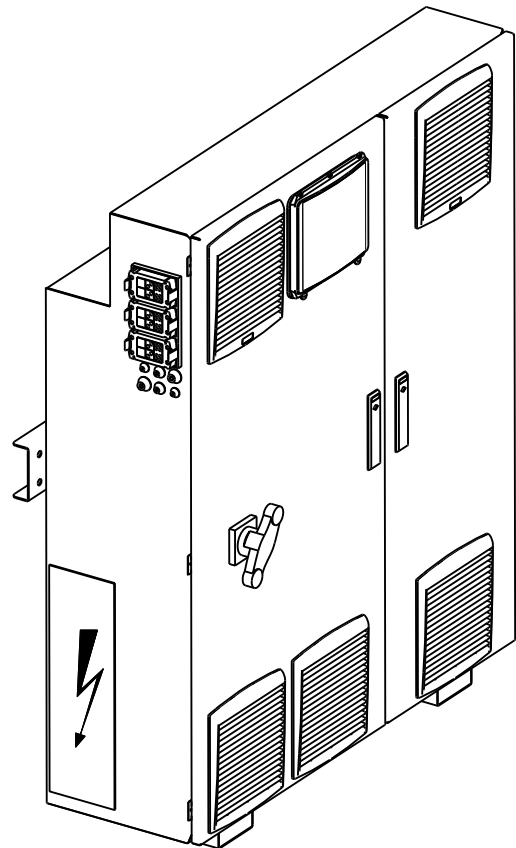


ECHELLE 11:160

STANDARD

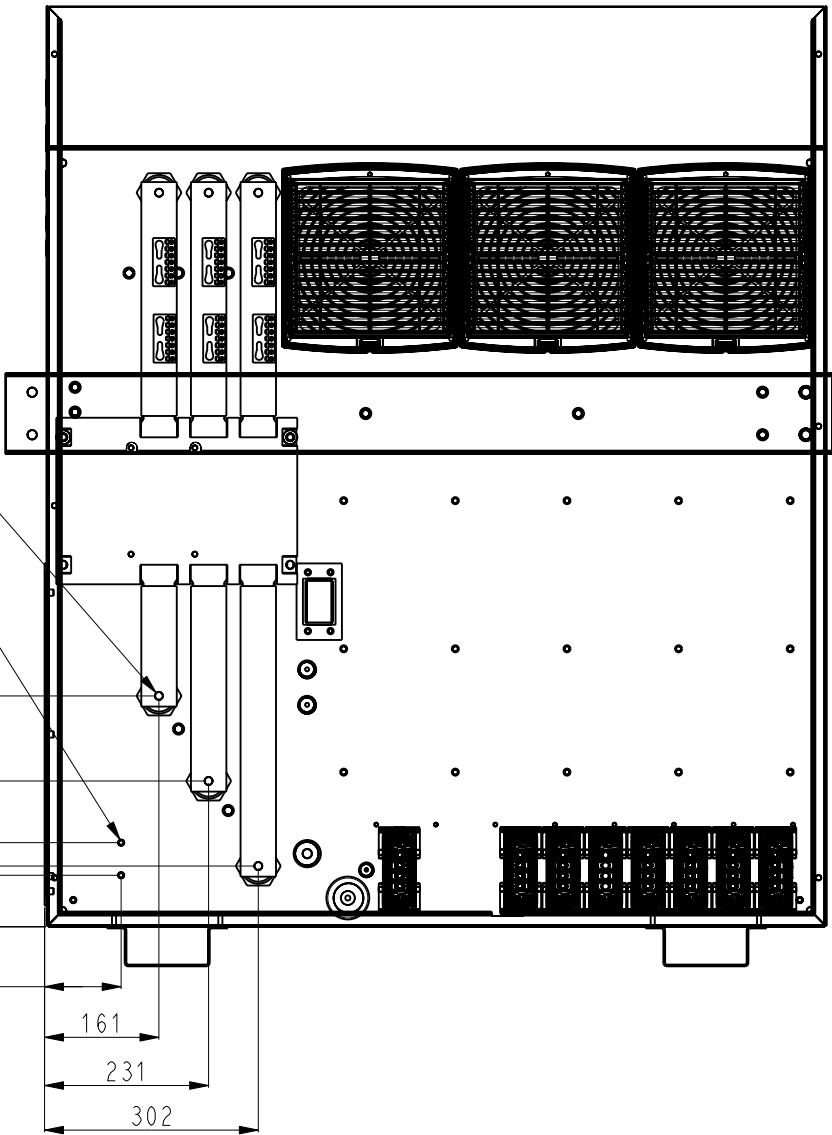


3 TROUS Ø11.0
HOLES

2x PE CLIENT FILETE M8
PE CUSTOMER THREADED M8

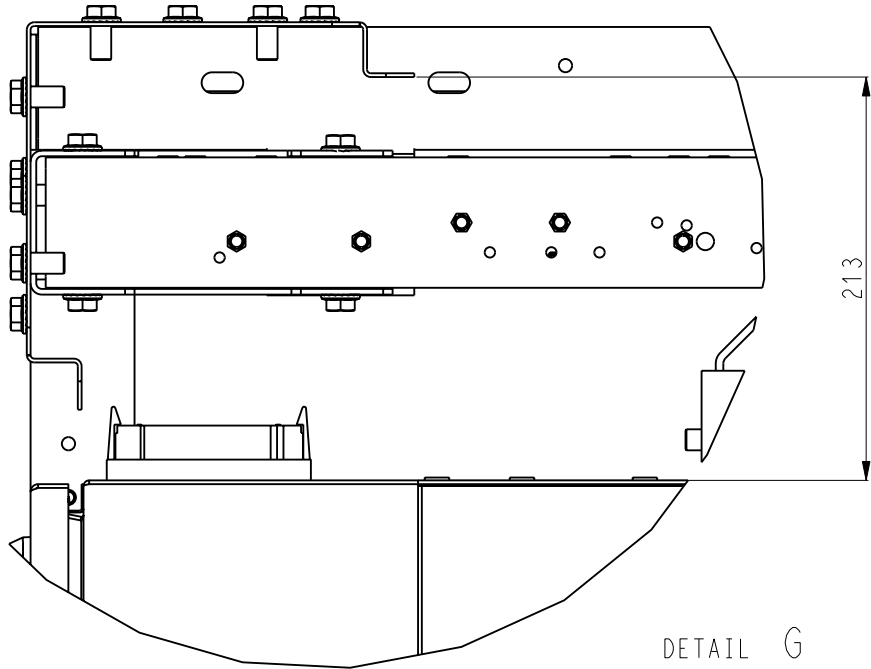

DETAIL G
ECHELLE 1:4

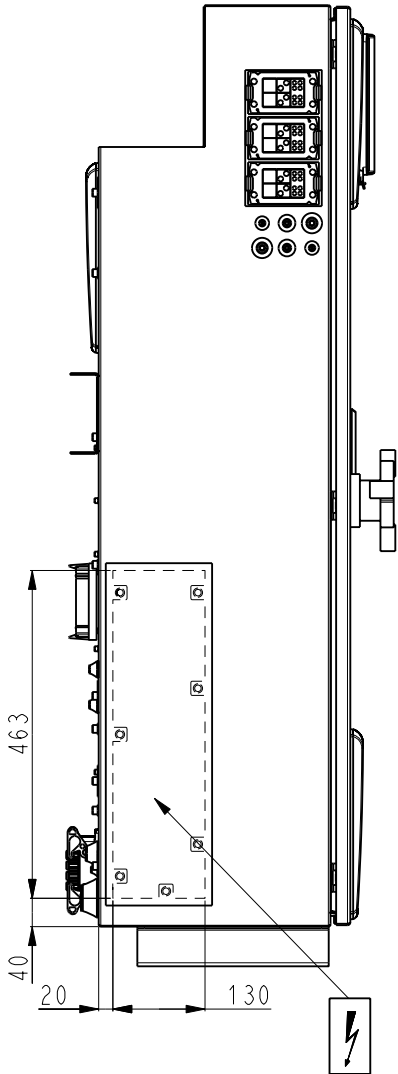

OPT 266

