





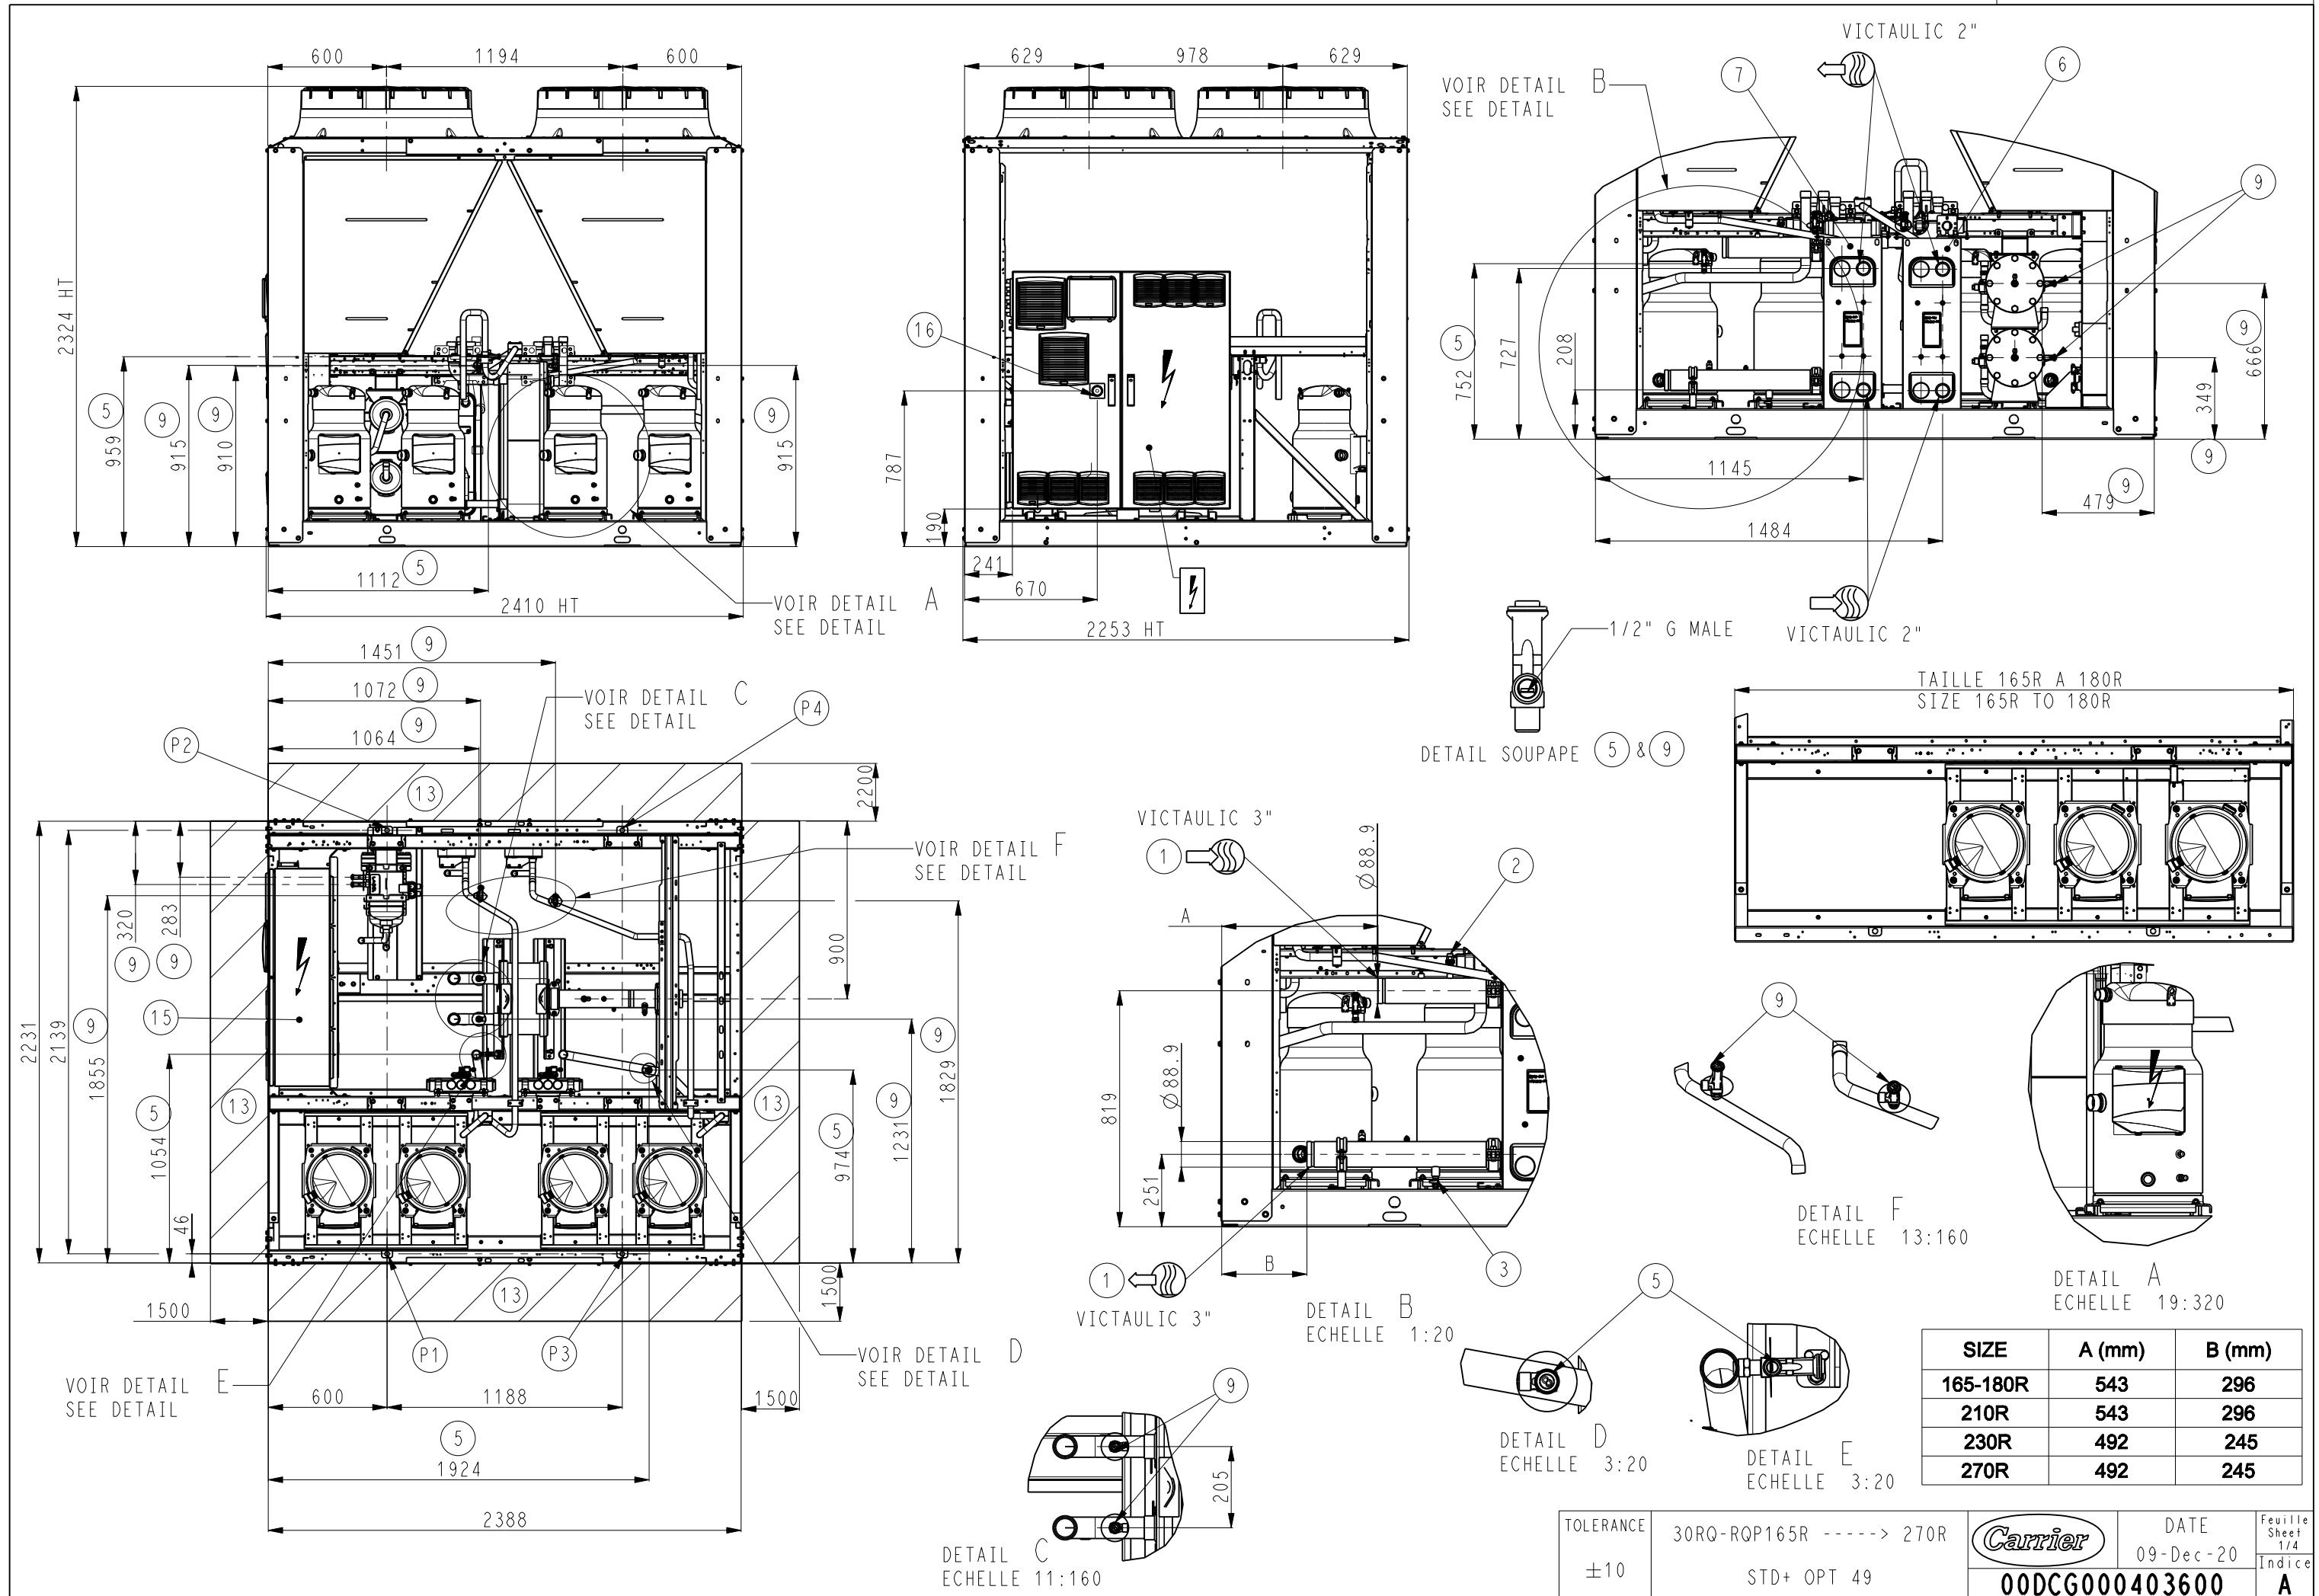


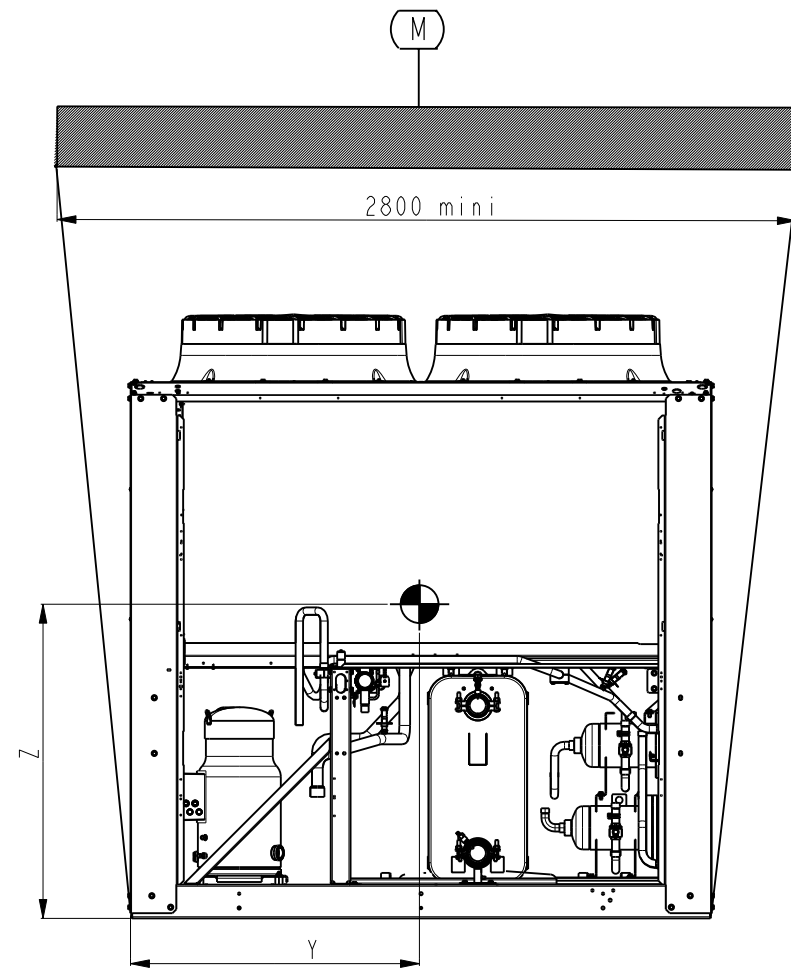

X (mm)	Y (mm)	Z (mm)
1127±55	974±25	819±15

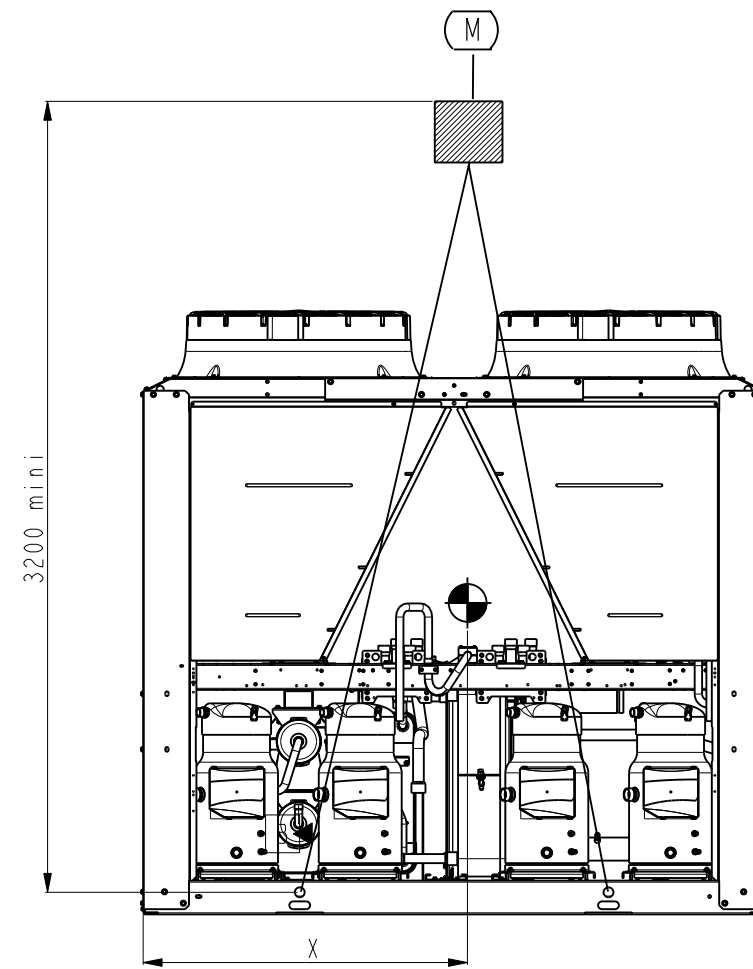


STANDARD

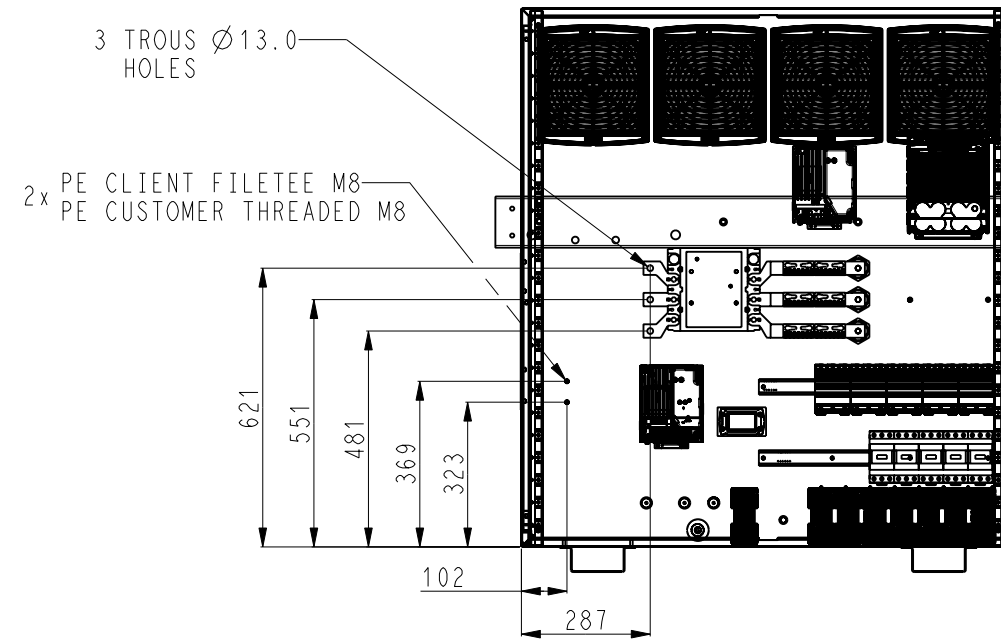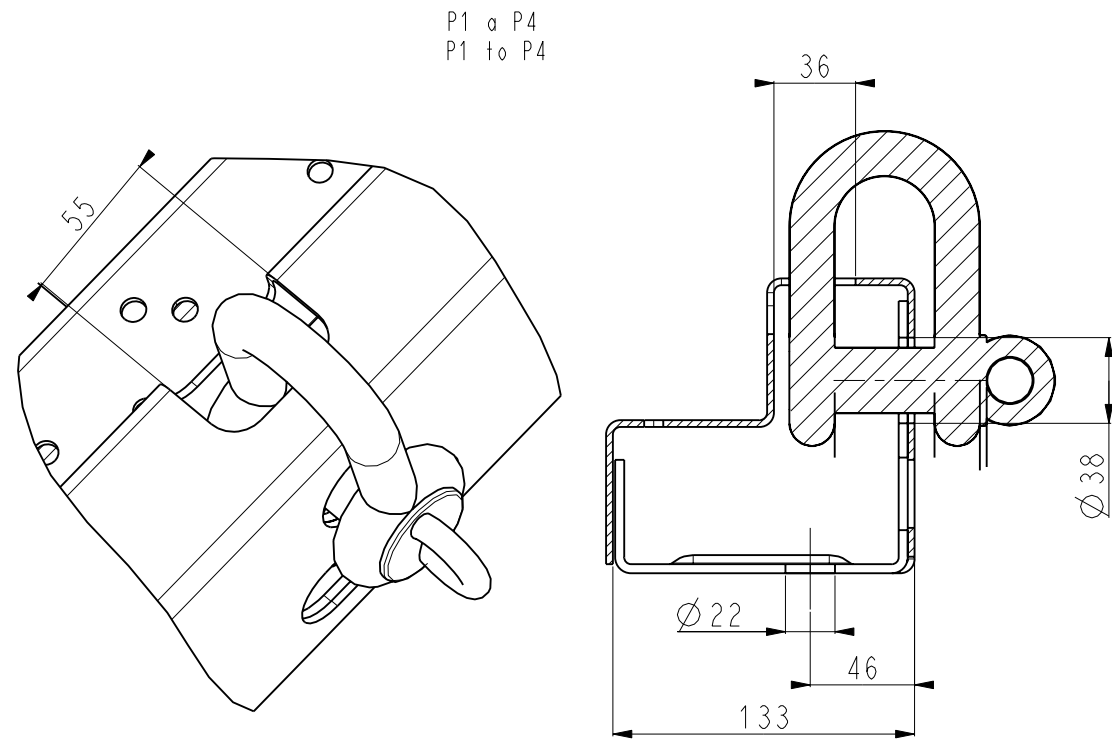

TOLERANCE	30RQ-RQP165R -----> 270R
±10	STD+ OPT 49

Carrier	DATE	Feuille Sheet 2/4
	09-Dec-20	
00DCG000403600		Indice A

OPT 266

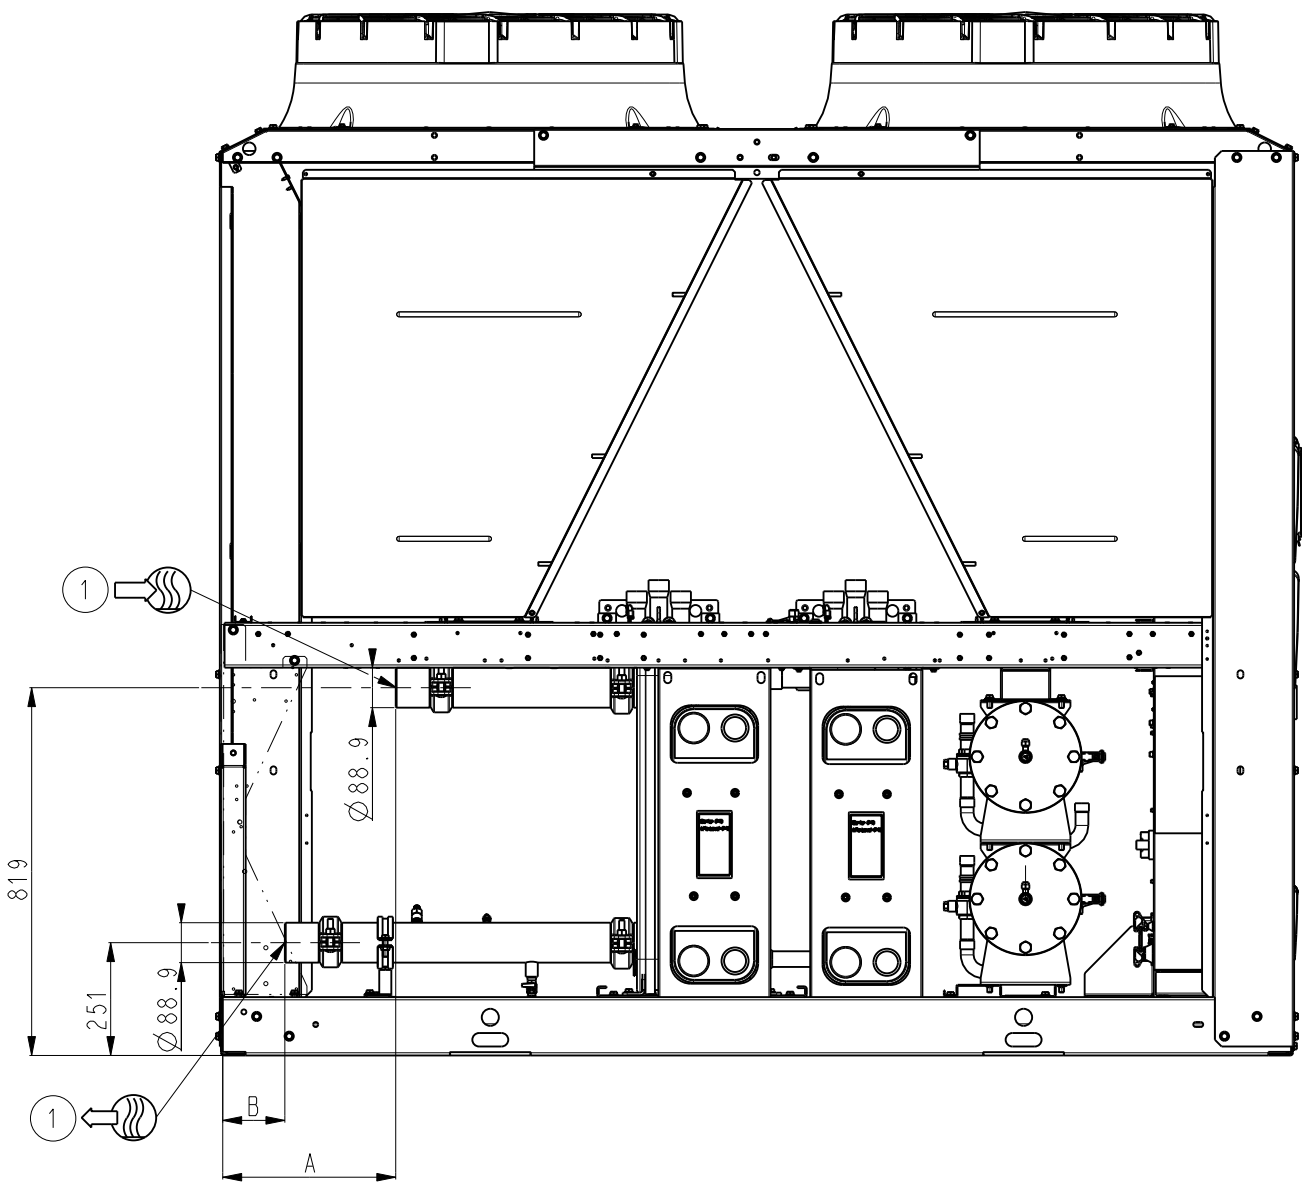

SIZE	A (mm)	B (mm)
165-180R	440	193
210R	440	193
230R	389	142
270R	389	142

