


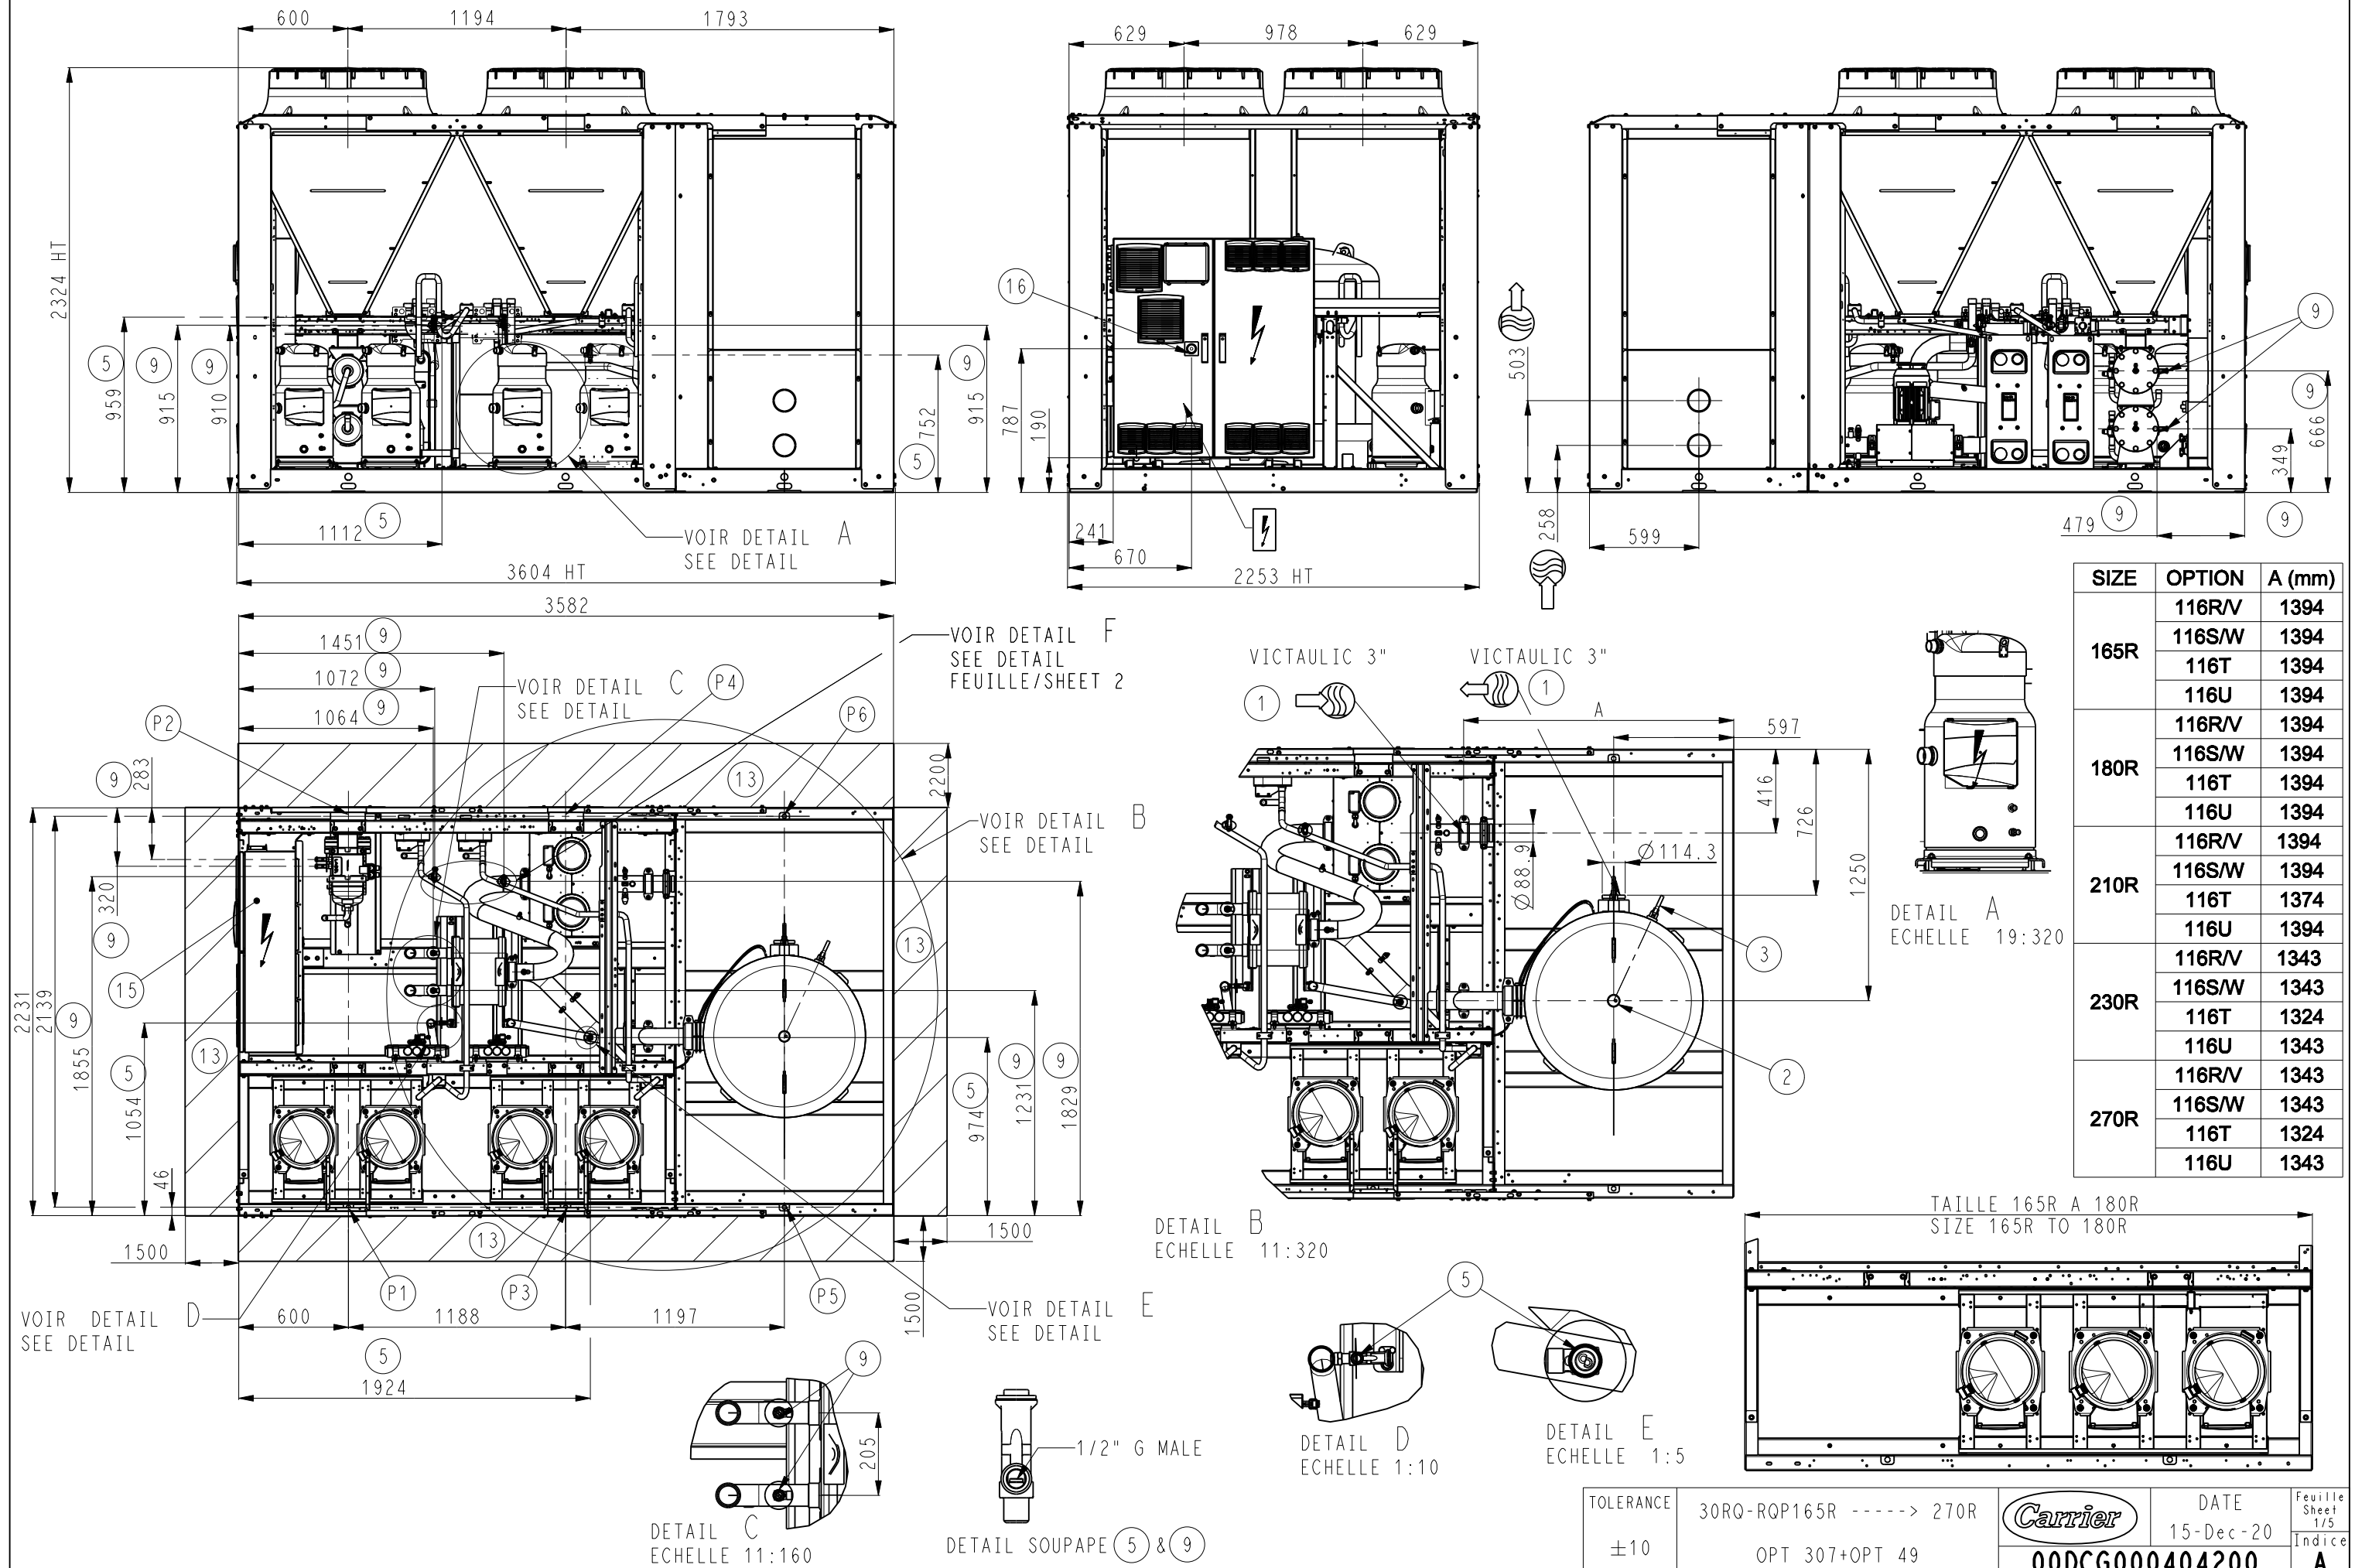


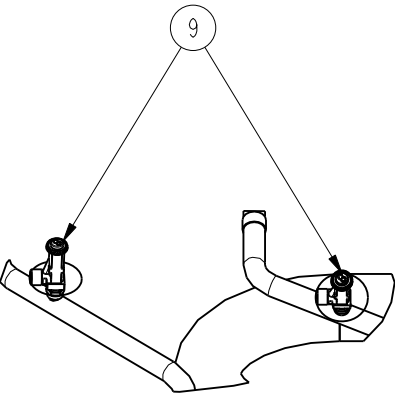


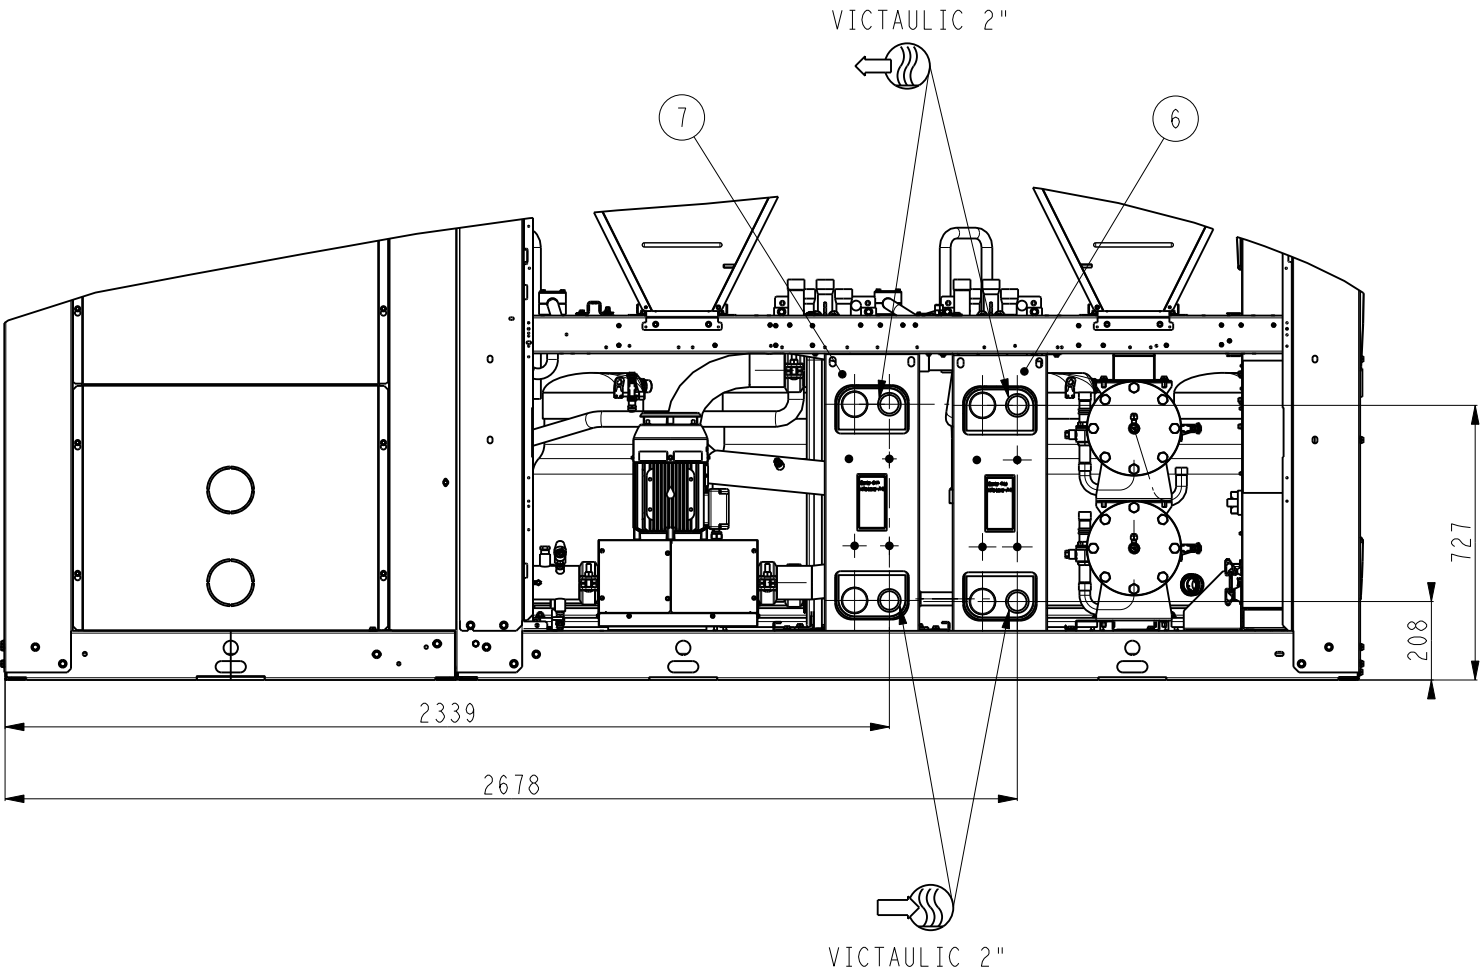


DETAIL F
ECHELLE 1:10

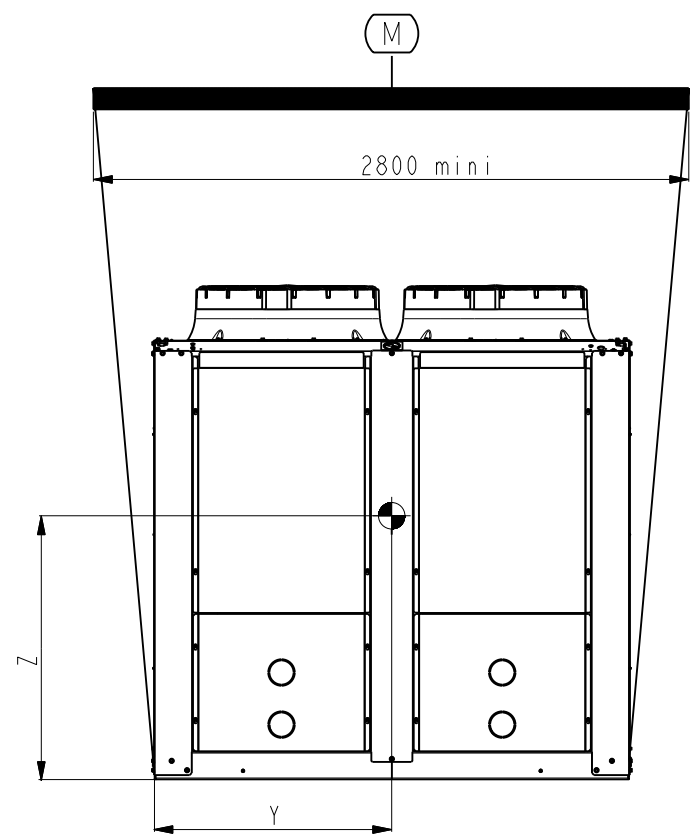


X (mm)	Y (mm)	Z (mm)
1798±65	1053±20	761±15

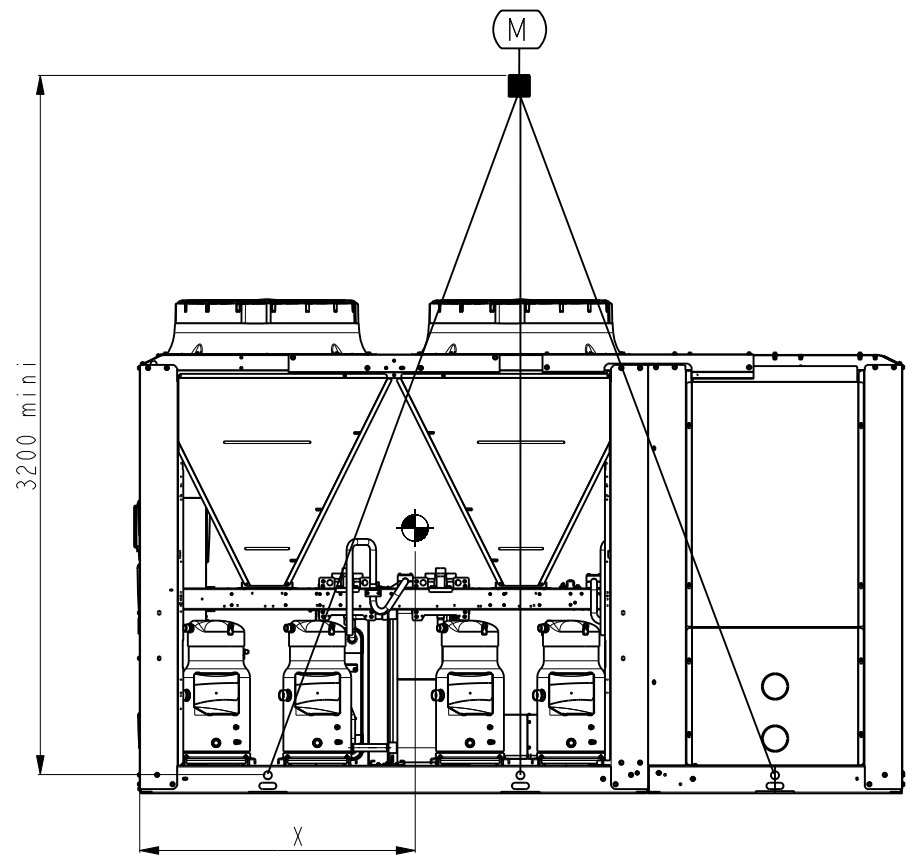

P1 α P6
P1 to P6

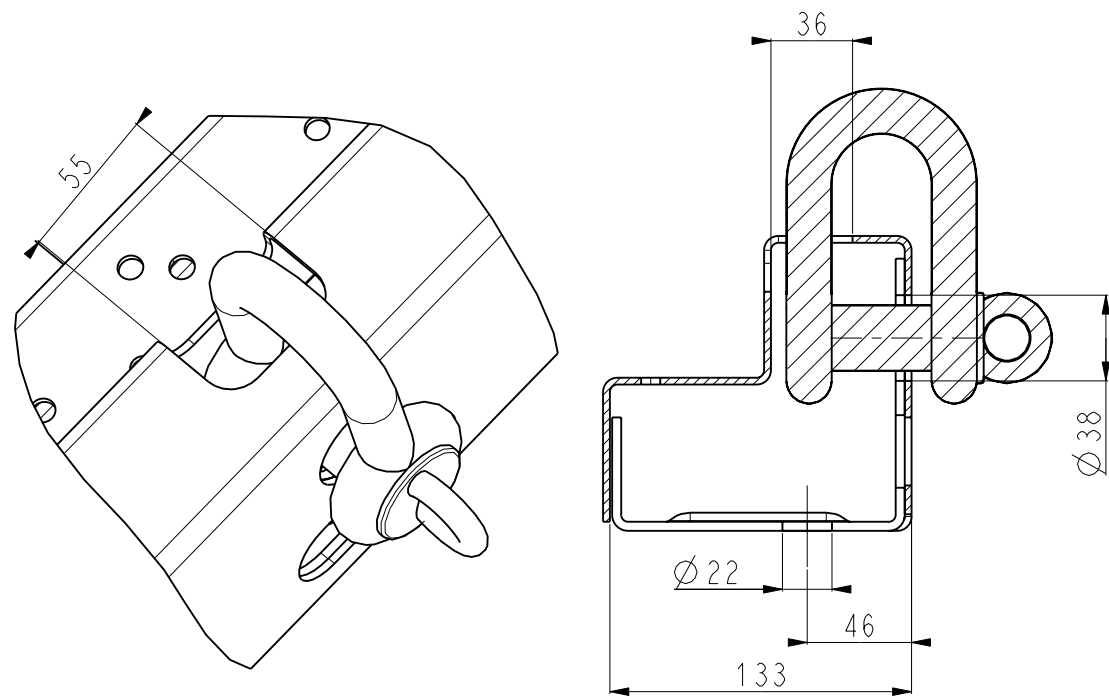



STANDARD

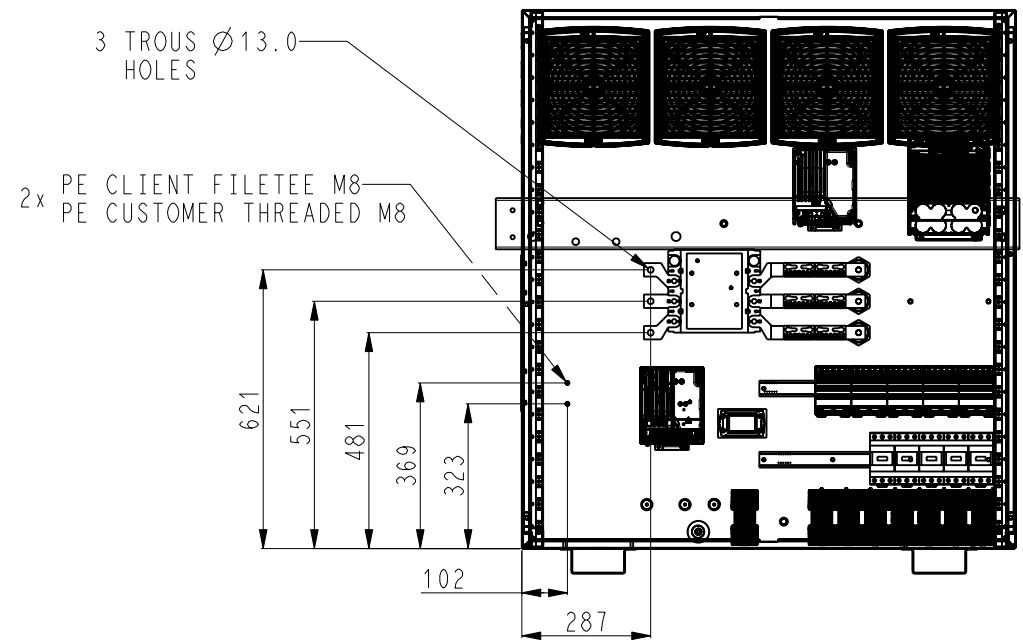

TOLERANCE	30RQ-RQP165R -----> 270R
±10	OPT 307+OPT 49

	DATE	Feuille
	15-Dec-20	Sheet 3/5
00DCG000404200		Indice A

OPT 266

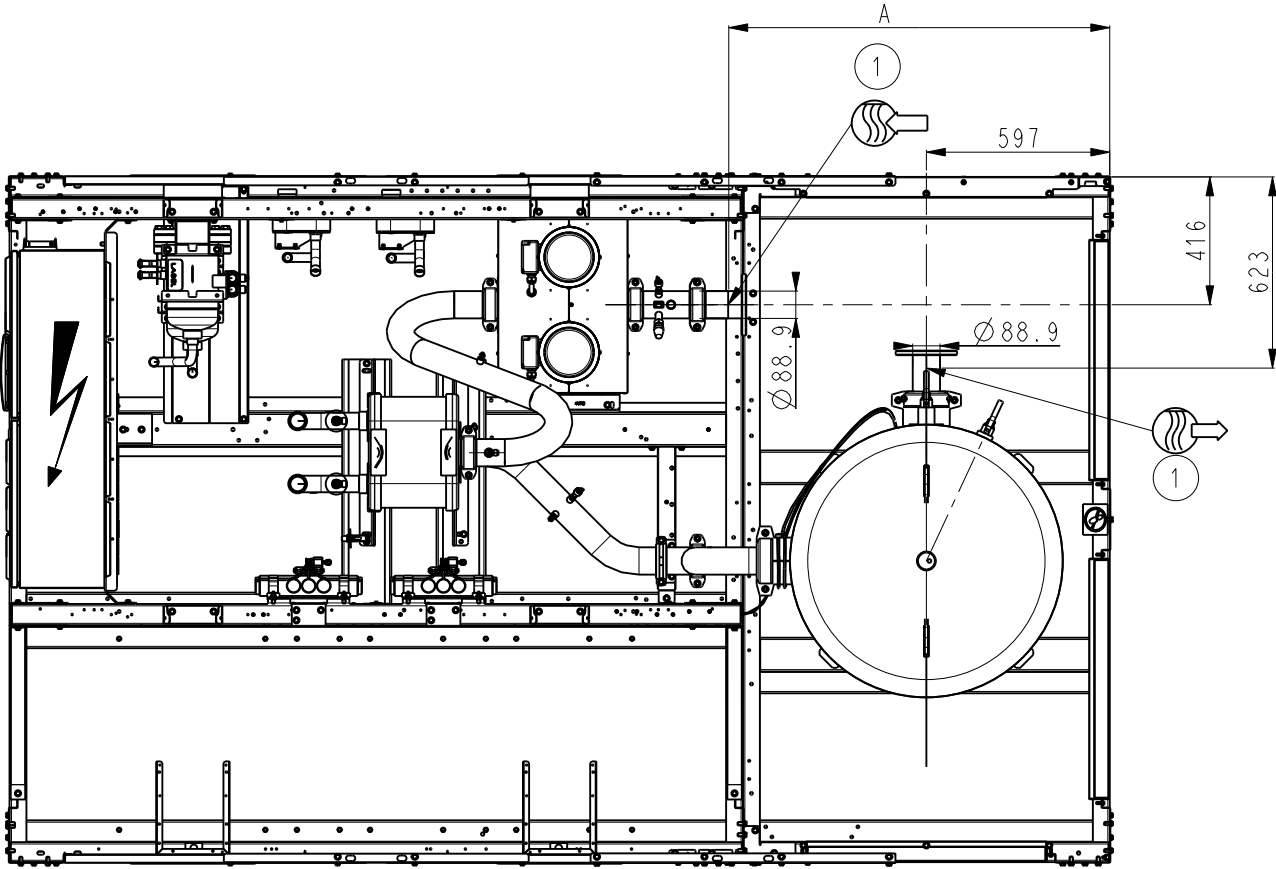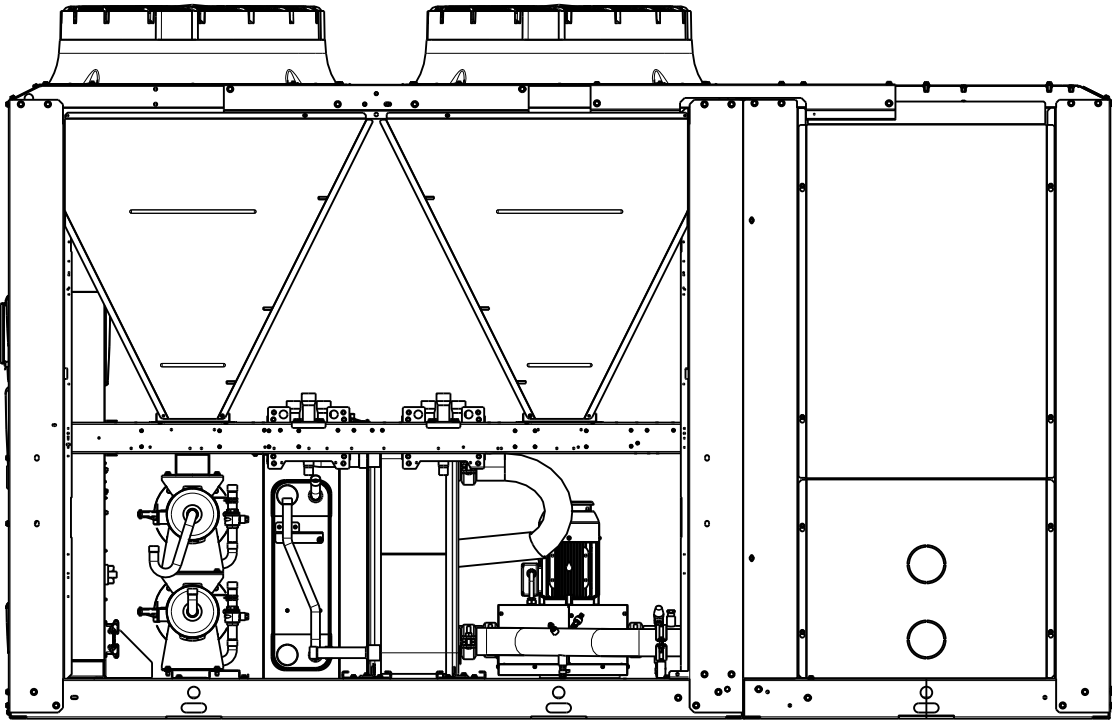

SIZE	OPTION	A (mm)
165R	116R/V	1291
	116S/W	1291
	116T	1291
	116U	1291
180R	116R/V	1291
	116S/W	1291
	116T	1291
	116U	1291
210R	116R/V	1291
	116S/W	1291
	116T	1271
	116U	1291
230R	116R/V	1240
	116S/W	1240
	116T	1221
	116U	1240
270R	116R/V	1240
	116S/W	1240
	116T	1221
	116U	1240

