

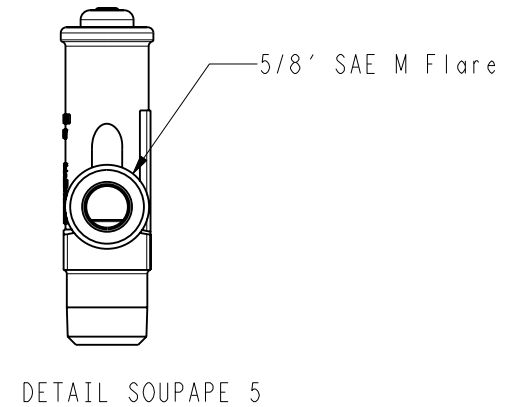
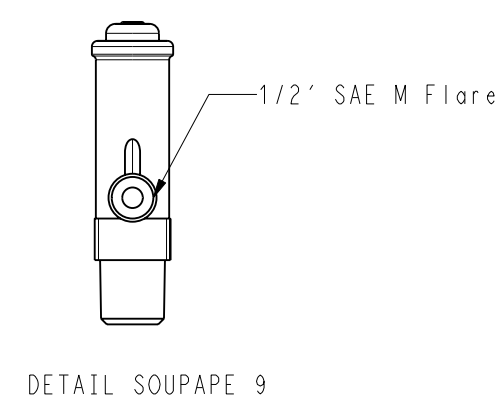
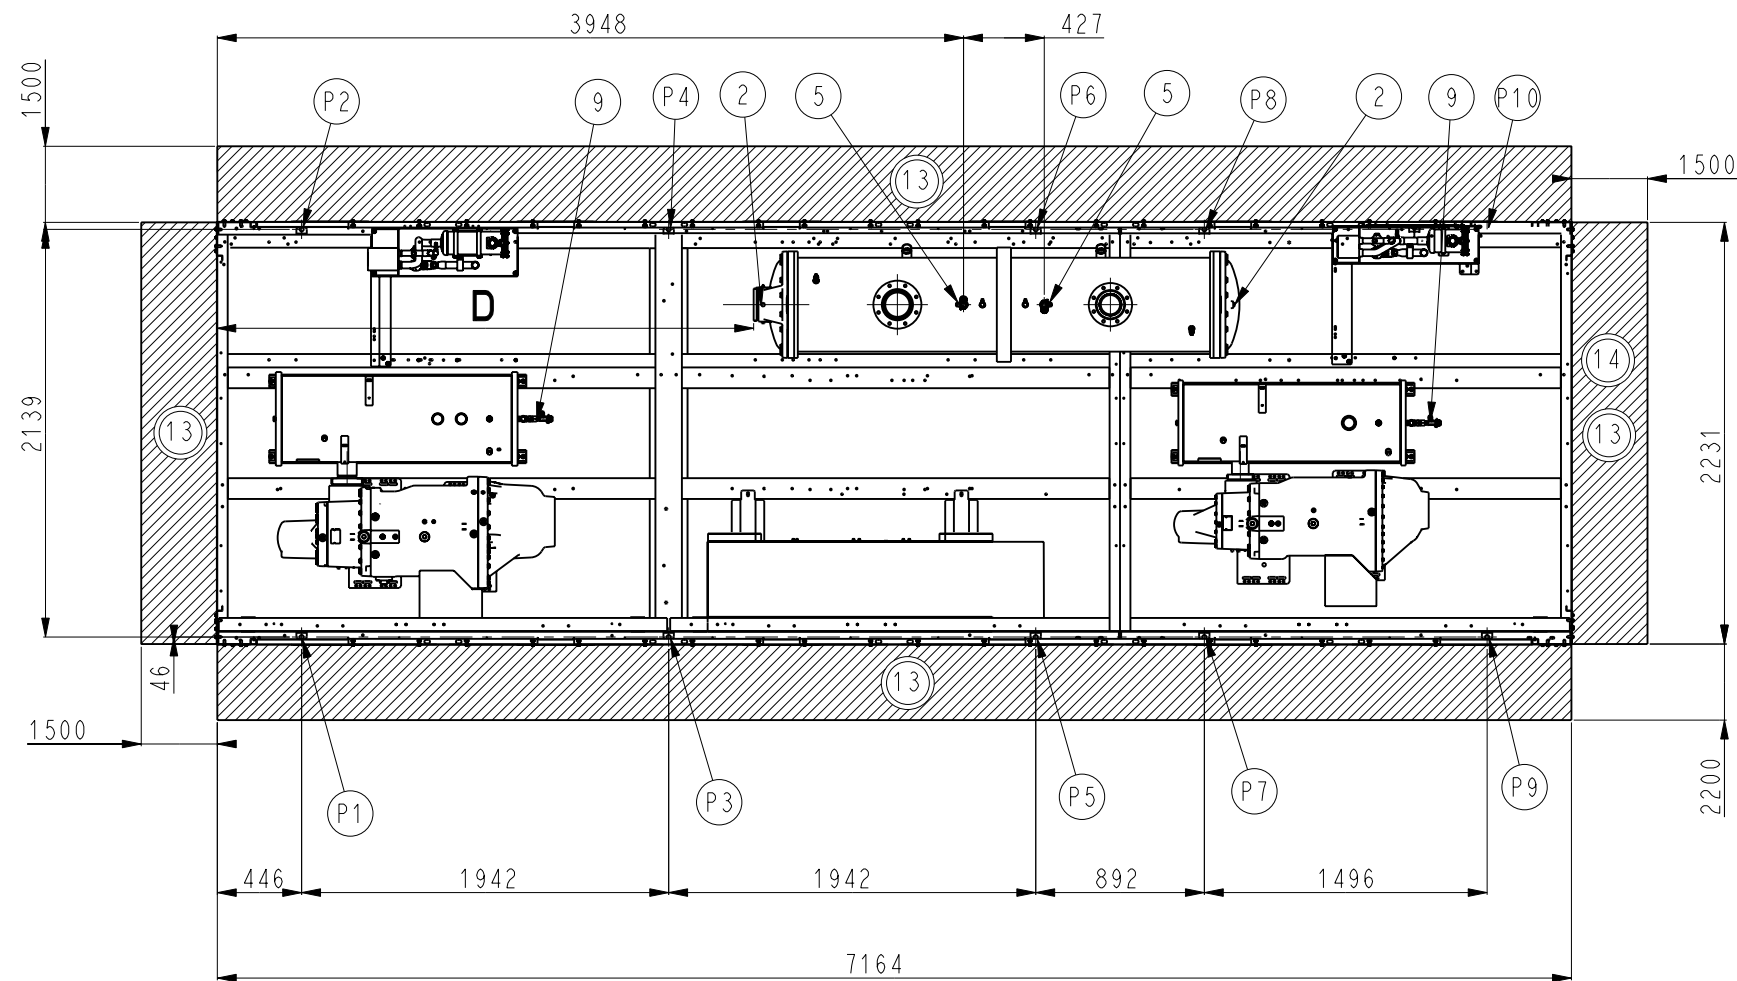


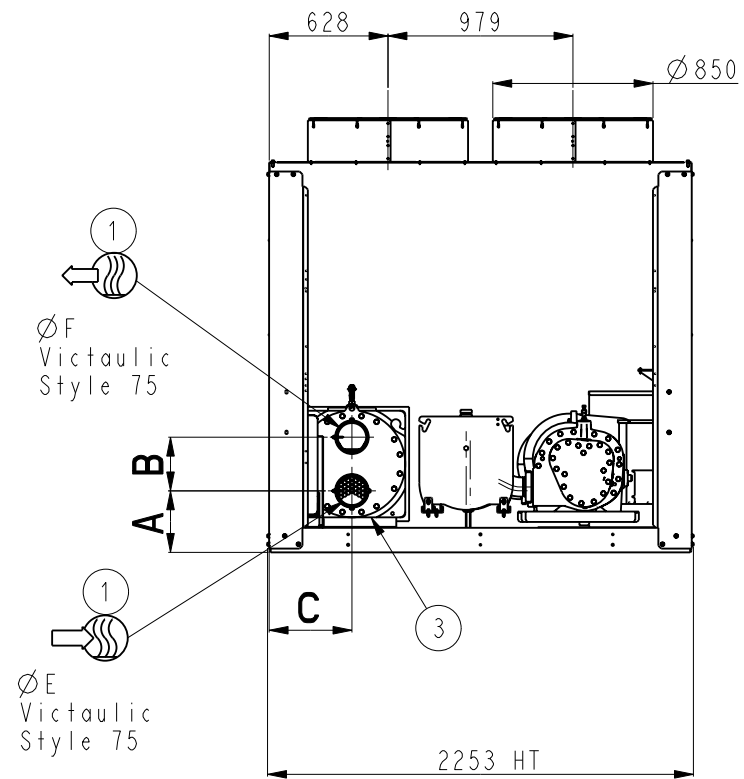

	30XBE0600	30XBE0700	30XBE0750	30XBE0800	30XBE0850
A	356	372	372	325	325
B	272	242	242	284	284
C	438	438	438	438	438
D	2852	2852	2852	2838	2838
ØE	141,3	168,3	168,3	168,3	168,3
ØF	141,3	168,3	168,3	168,3	168,3

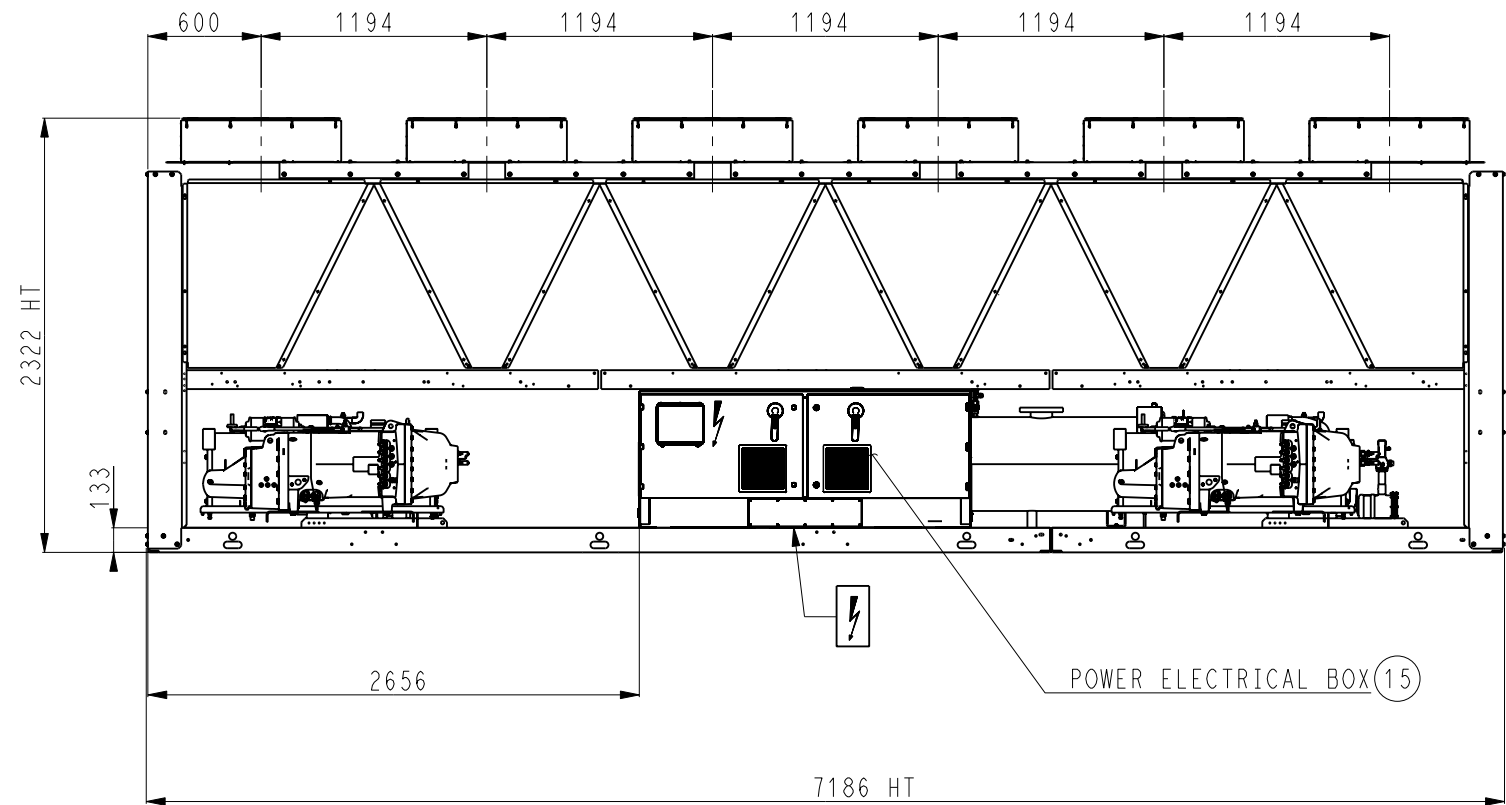

THE OUTLET CONNECTING PIPE CAN'T BE STRAIGHT, DUE TO OTHER PARTS' PROXIMITY IN THIS AREA


OPTION 100A

OR

OPTION 5


OR

OPTION 6

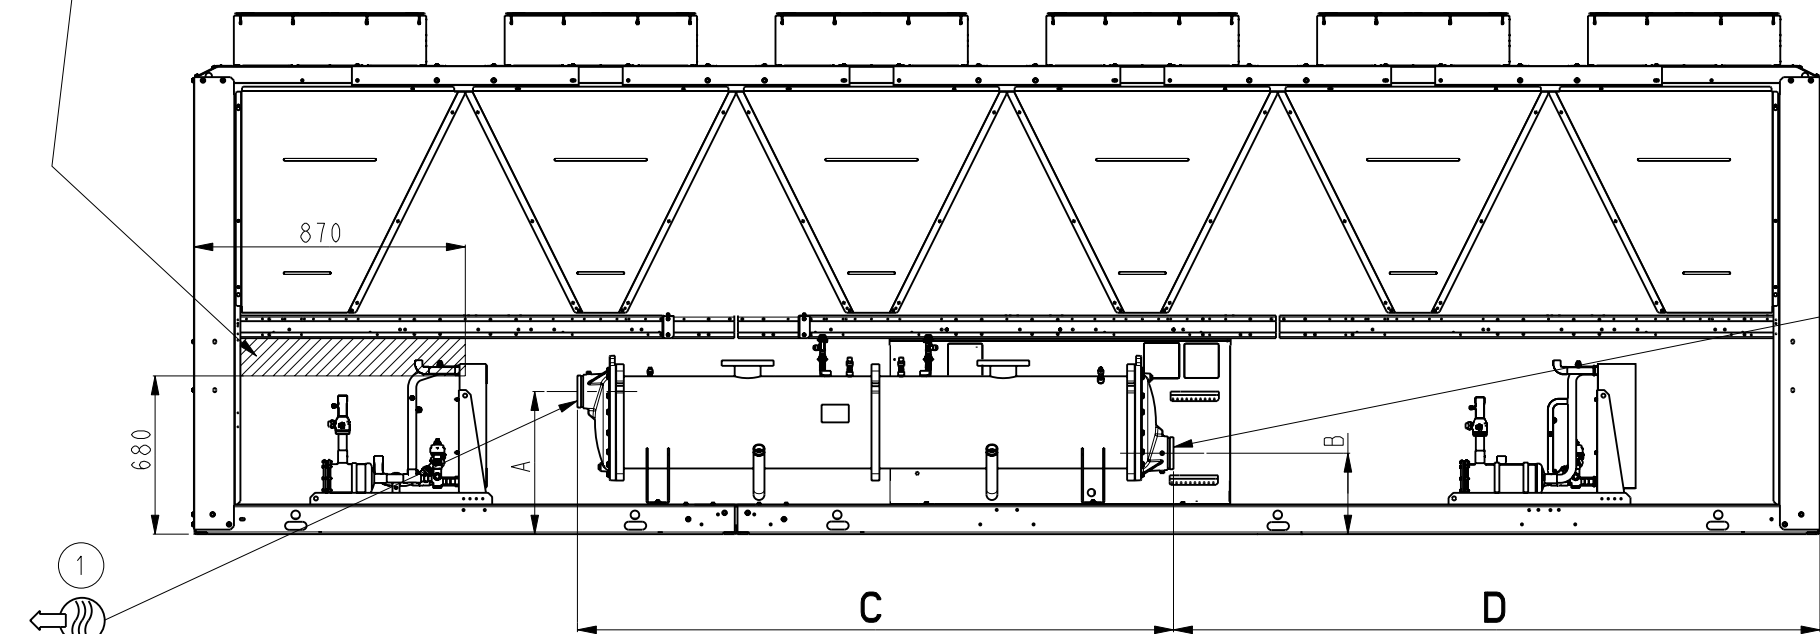

Ø141.3
VICTAULIC STYLE 75

Ø141.3
VICTAULIC STYLE 75

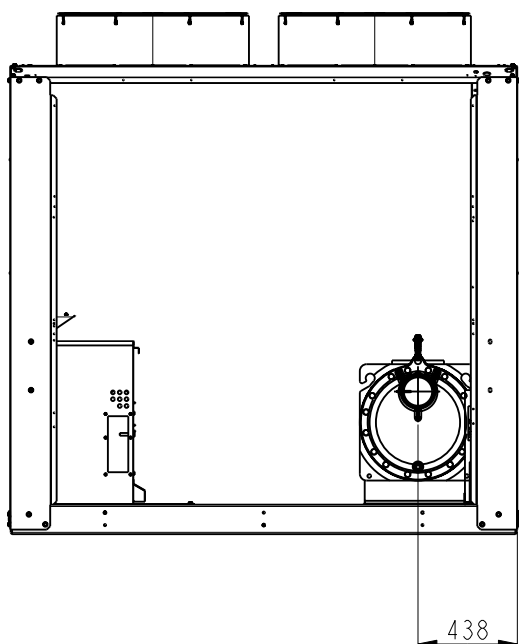


OPTION 100A + 107

OR

OPTION 5 + 107


OR

OPTION 6 + 107

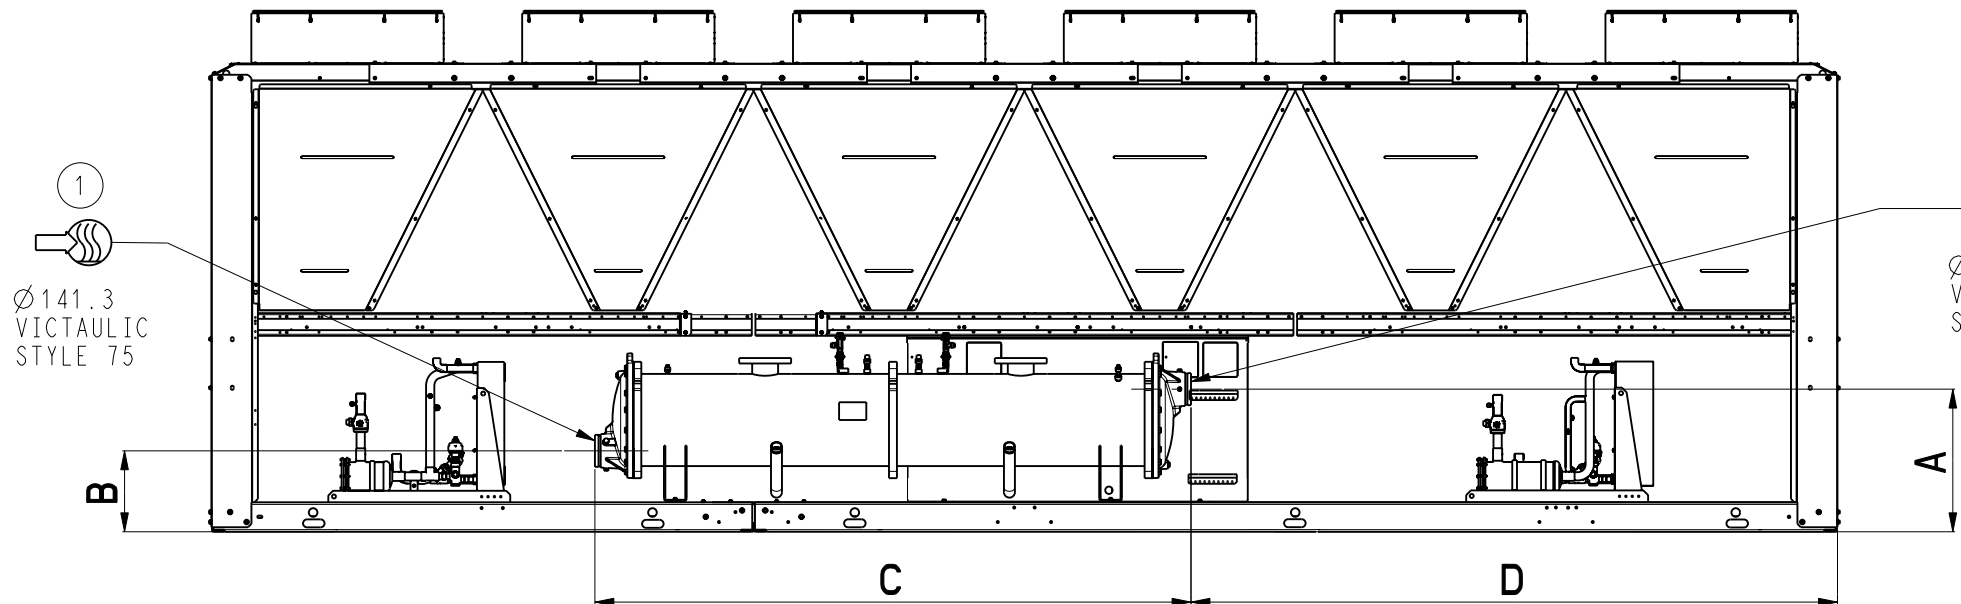

Ø141.3
VICTAULIC STYLE 75

Ø141.3
VICTAULIC STYLE 75

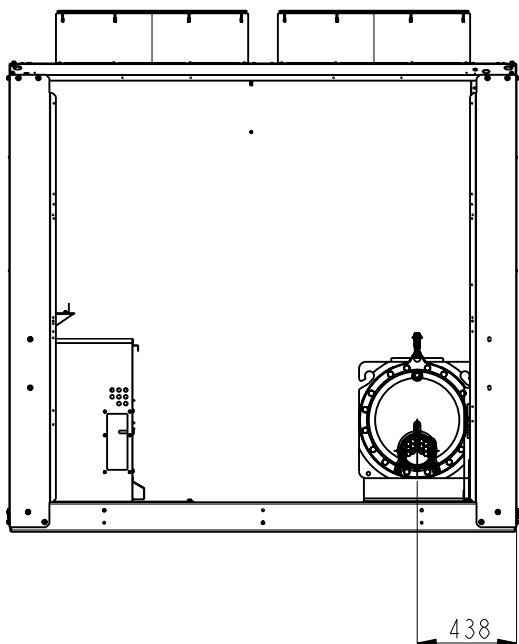

	30XBE0600	30XBE0700	30XBE0750	30XBE0800	30XBE0850
A	629	629	629	609	609
B	357	357	357	325	325
C	2628	2628	2628	2767	2767
D	2850	2850	2850	2780	2780

TOLERANCE
±10

30XBE0600-0700-0750-0800-0850

Carrier

DATE
20-Aug-20



00DCG000408100

Feuille
Sheet
2/7
Indice
A



THE OUTLET CONNECTING PIPE CAN'T BE STRAIGHT, DUE TO OTHER PARTS' PROXIMITY IN THIS AREA

OPTION 107

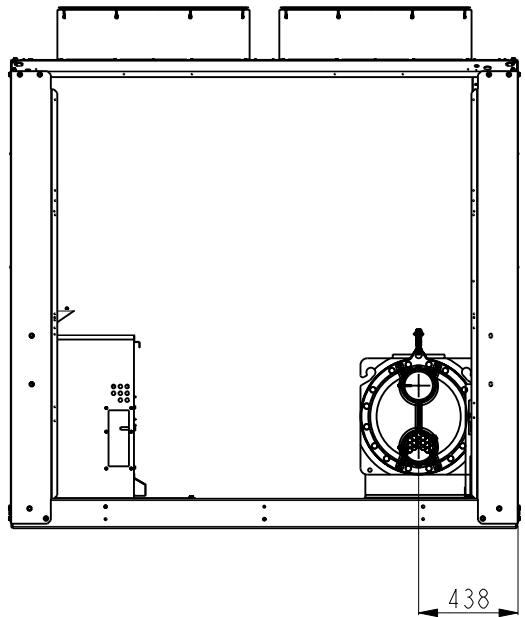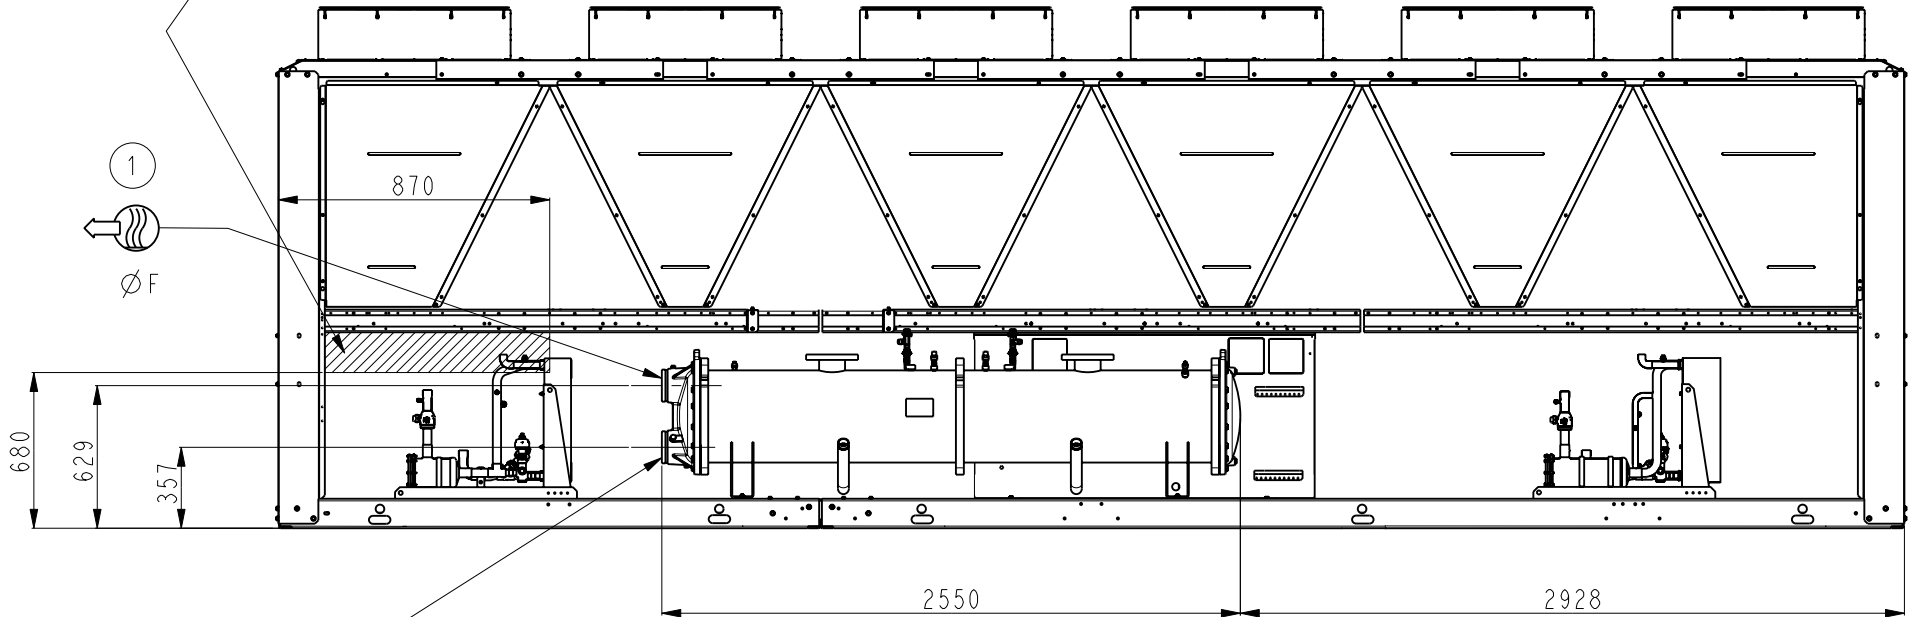


OPTION 100C

OPTION 107




1



Ø 168.3
VICTAULIC
STYLE 75

493

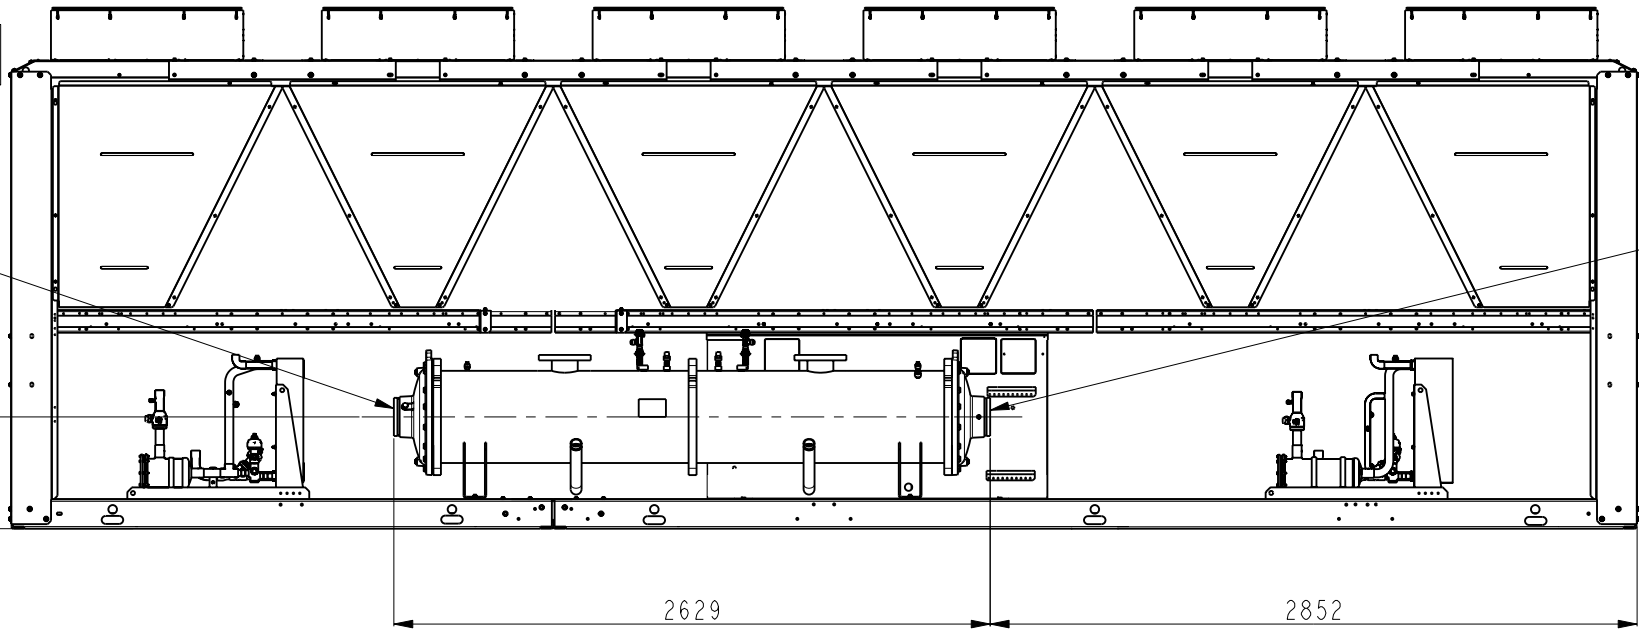


OPTION 107








1



Ø 168.3
VICTAULIC
STYLE 75

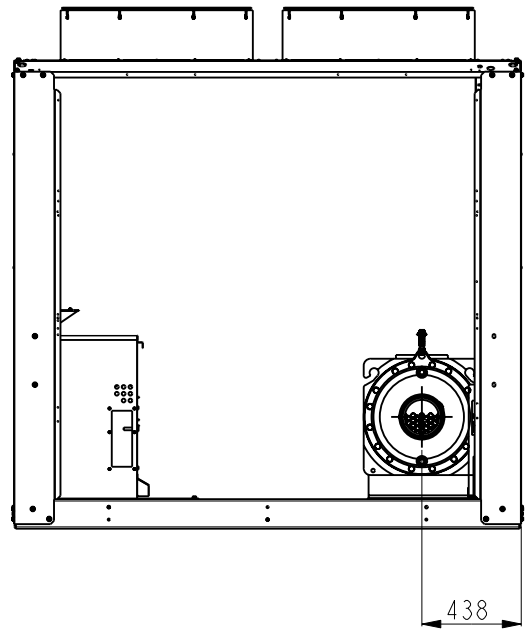


	30XBE0600	30XBE0700	30XBE0750	30XBE0800	30XBE0850
X	3594	3499	3388	3465	3499.817
Y	1100	1164	1096	1128	1122.63
Z	705	859	756	736	678.03

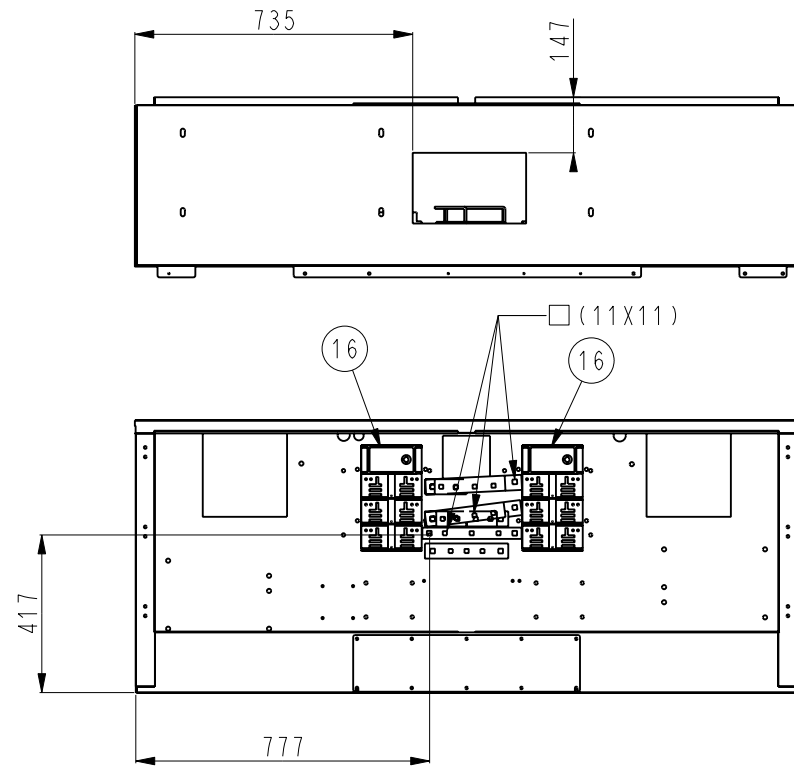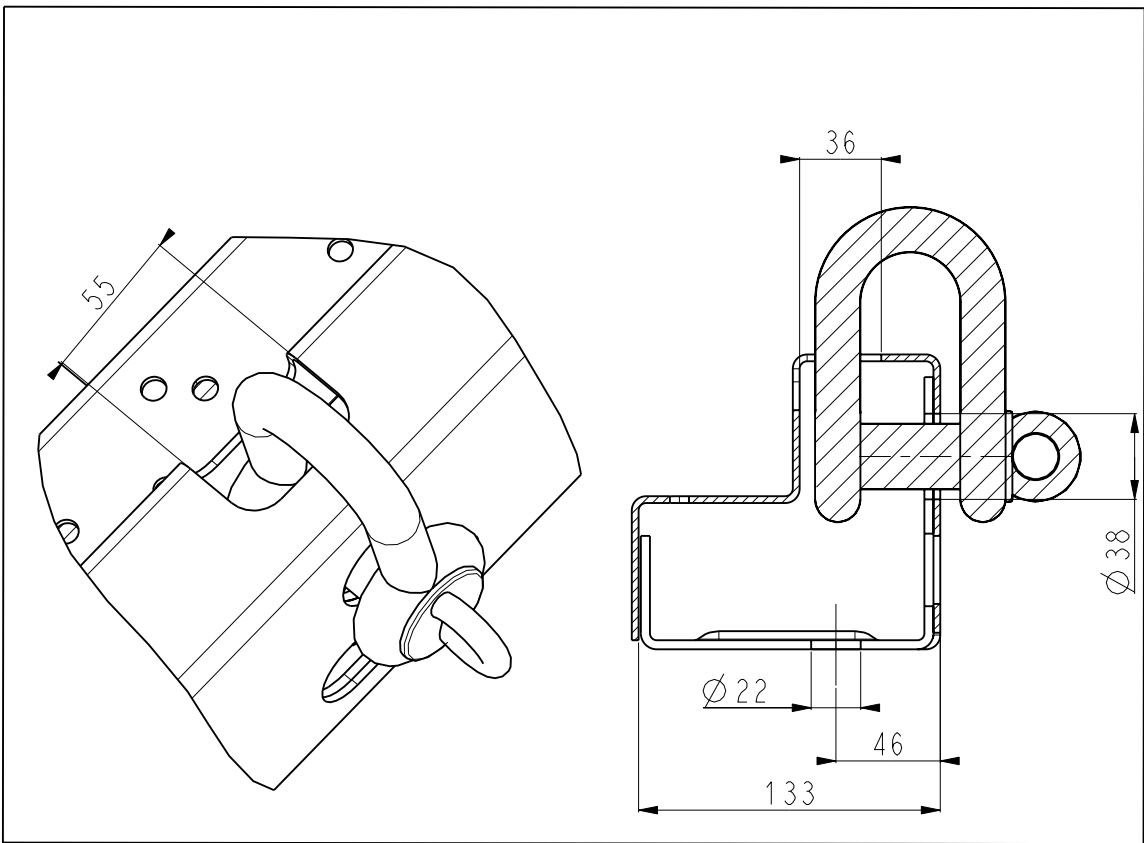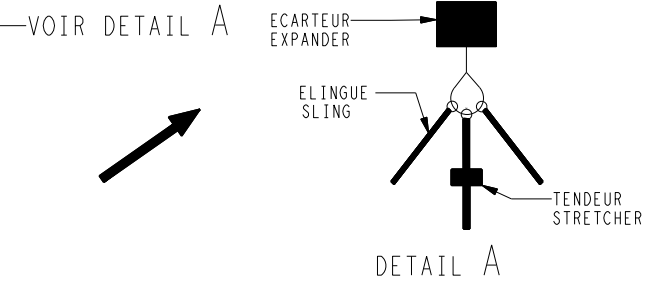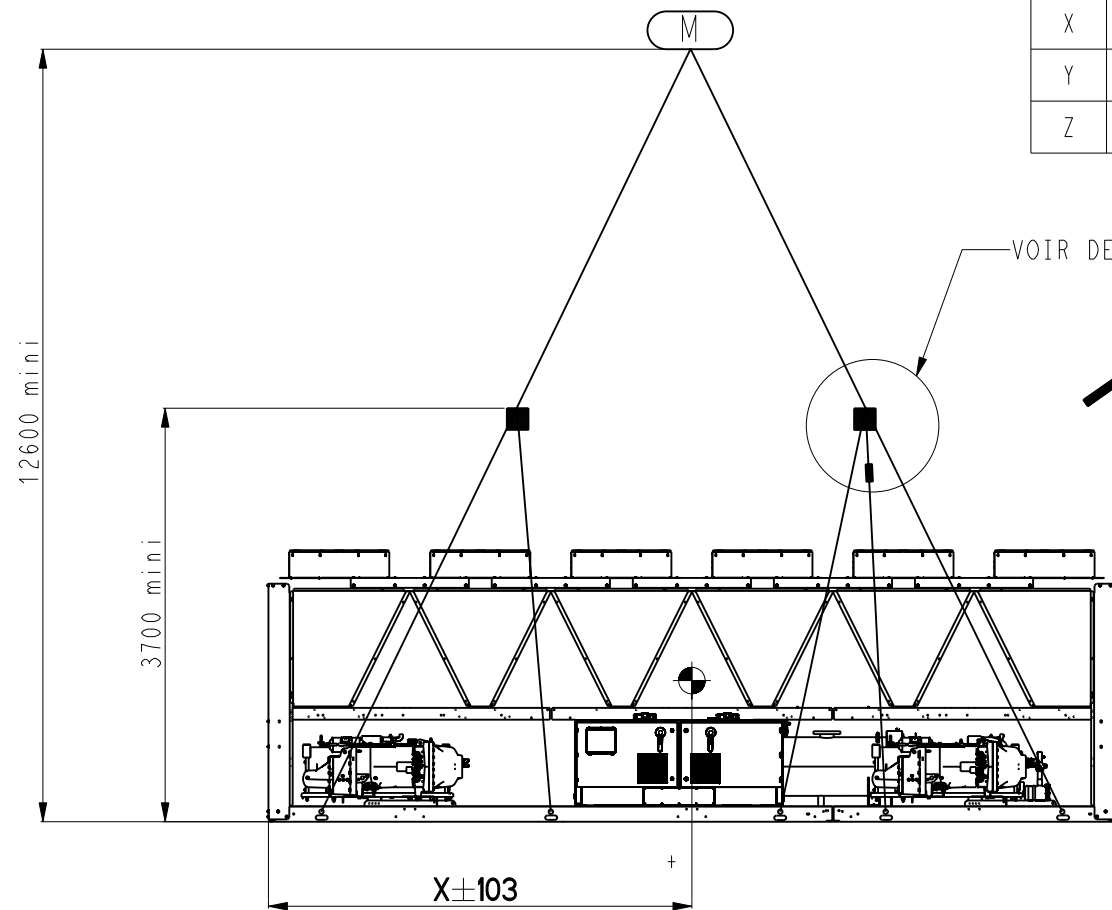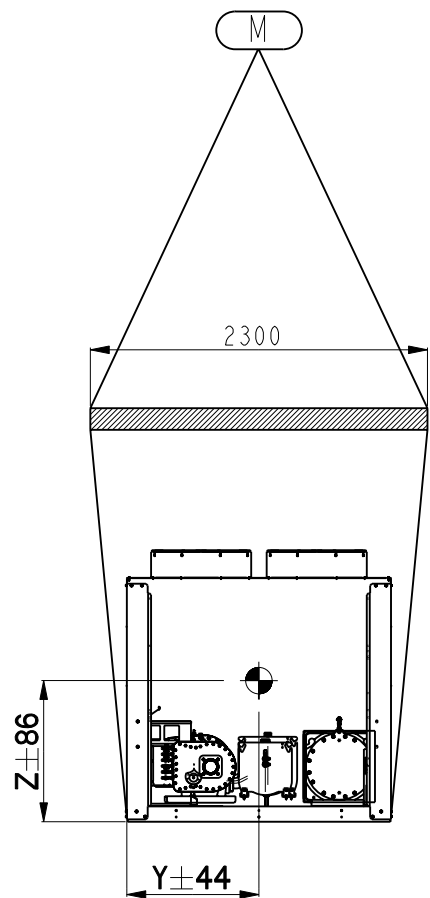


A400
ELECTRICAL BOX: POWER CONNECTION


OPT 266

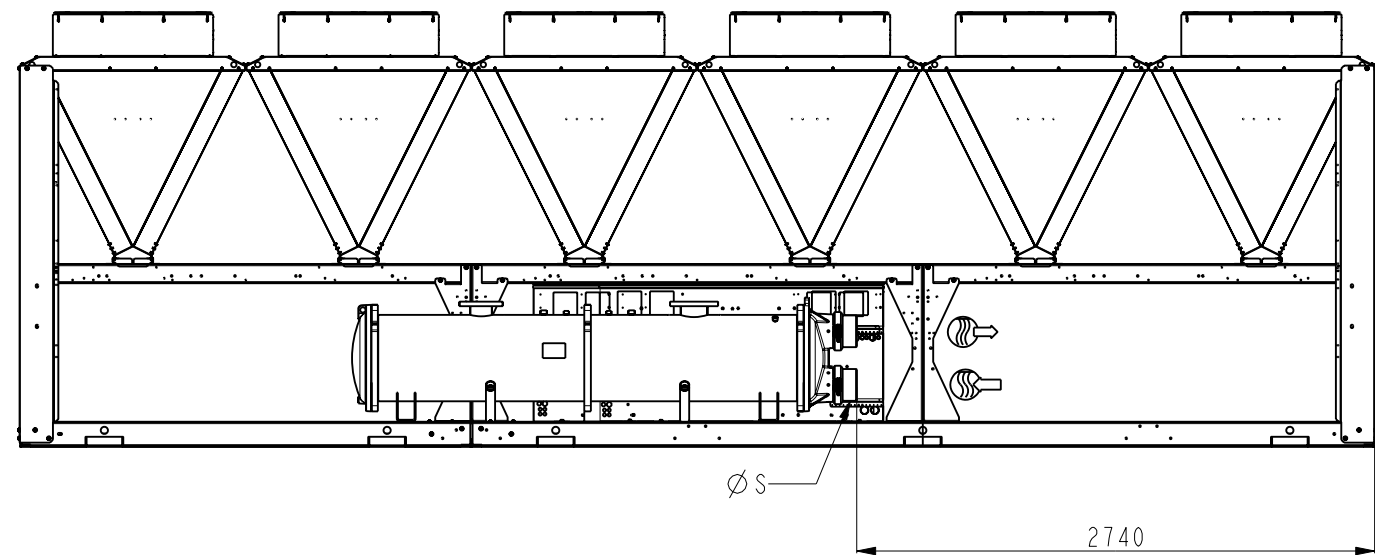


OPT 266:100C

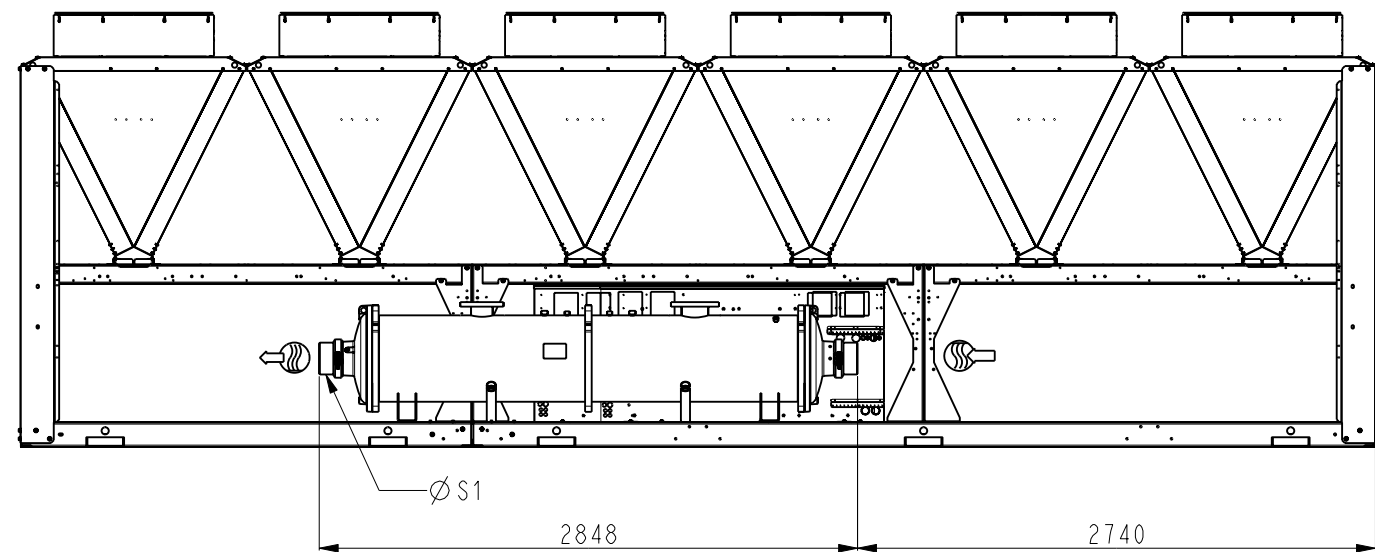

OPT 266:107

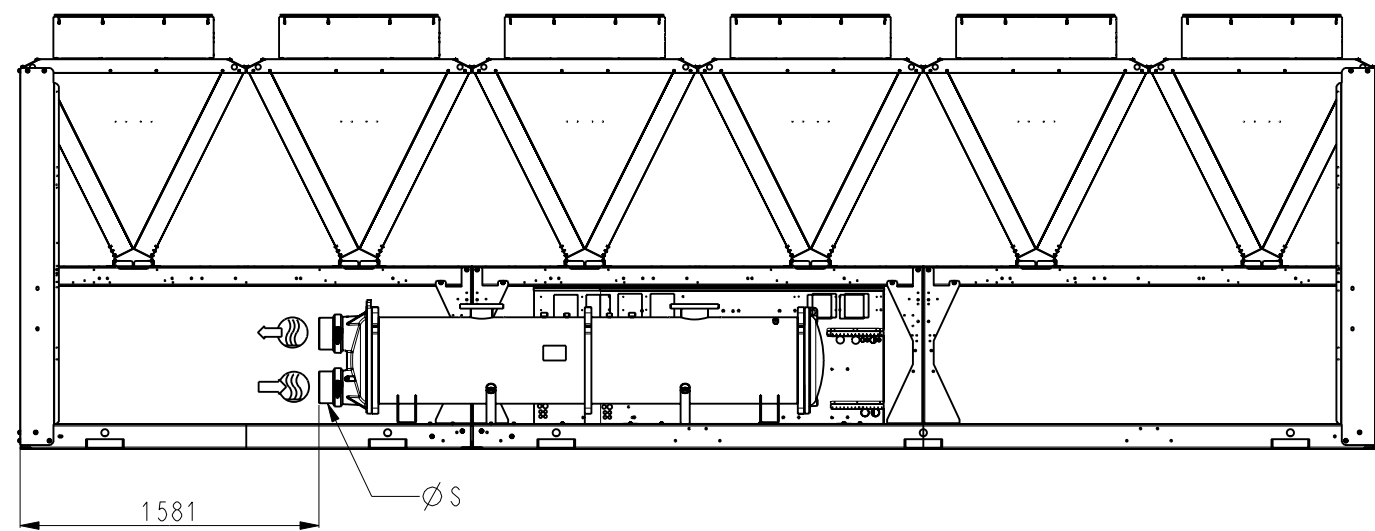


OPT 266:100C+107

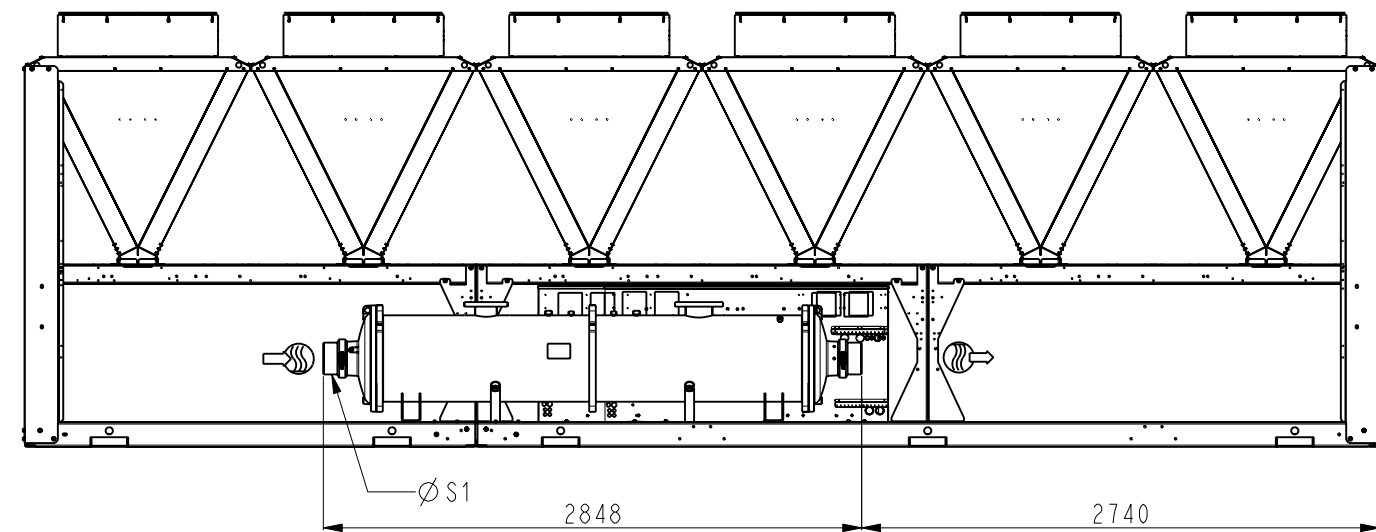


	Ø S mm	Ø S1 mm	Ø S2 mm
30XBE0600	141.3	168.3	141.3
30XBE0700-0750-0800-0850	168.3	168.3	141.3

OPT (5 OR 6 OR 100A) + 266

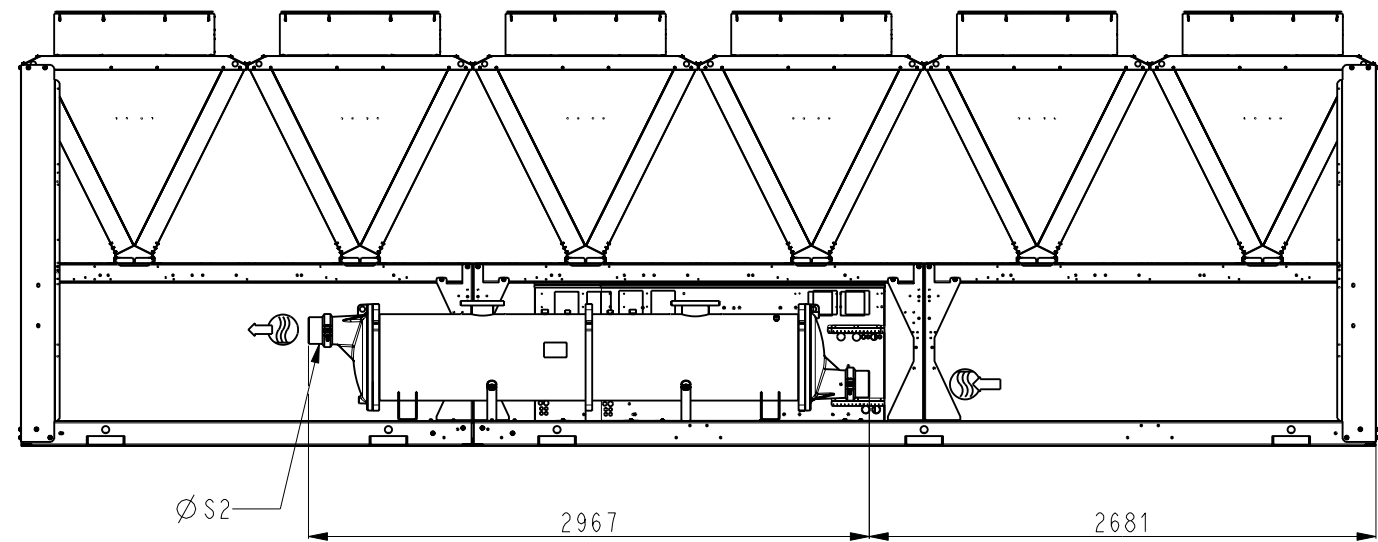

OPT (5+107 OR 6+107 OR 100A+107) + 266

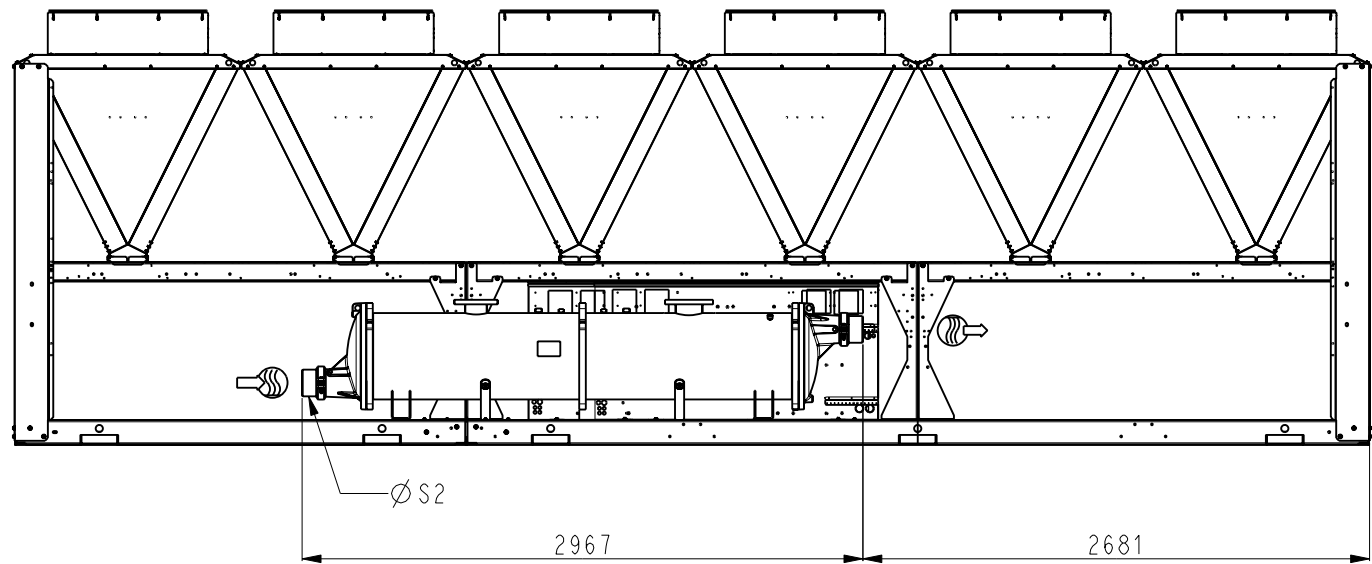

	Ø S mm	Ø S1 mm	Ø S2 mm
30XBE0600	141.3	168.3	141.3
30XBE0700-0750-0800-0850	168.3	168.3	141.3

