

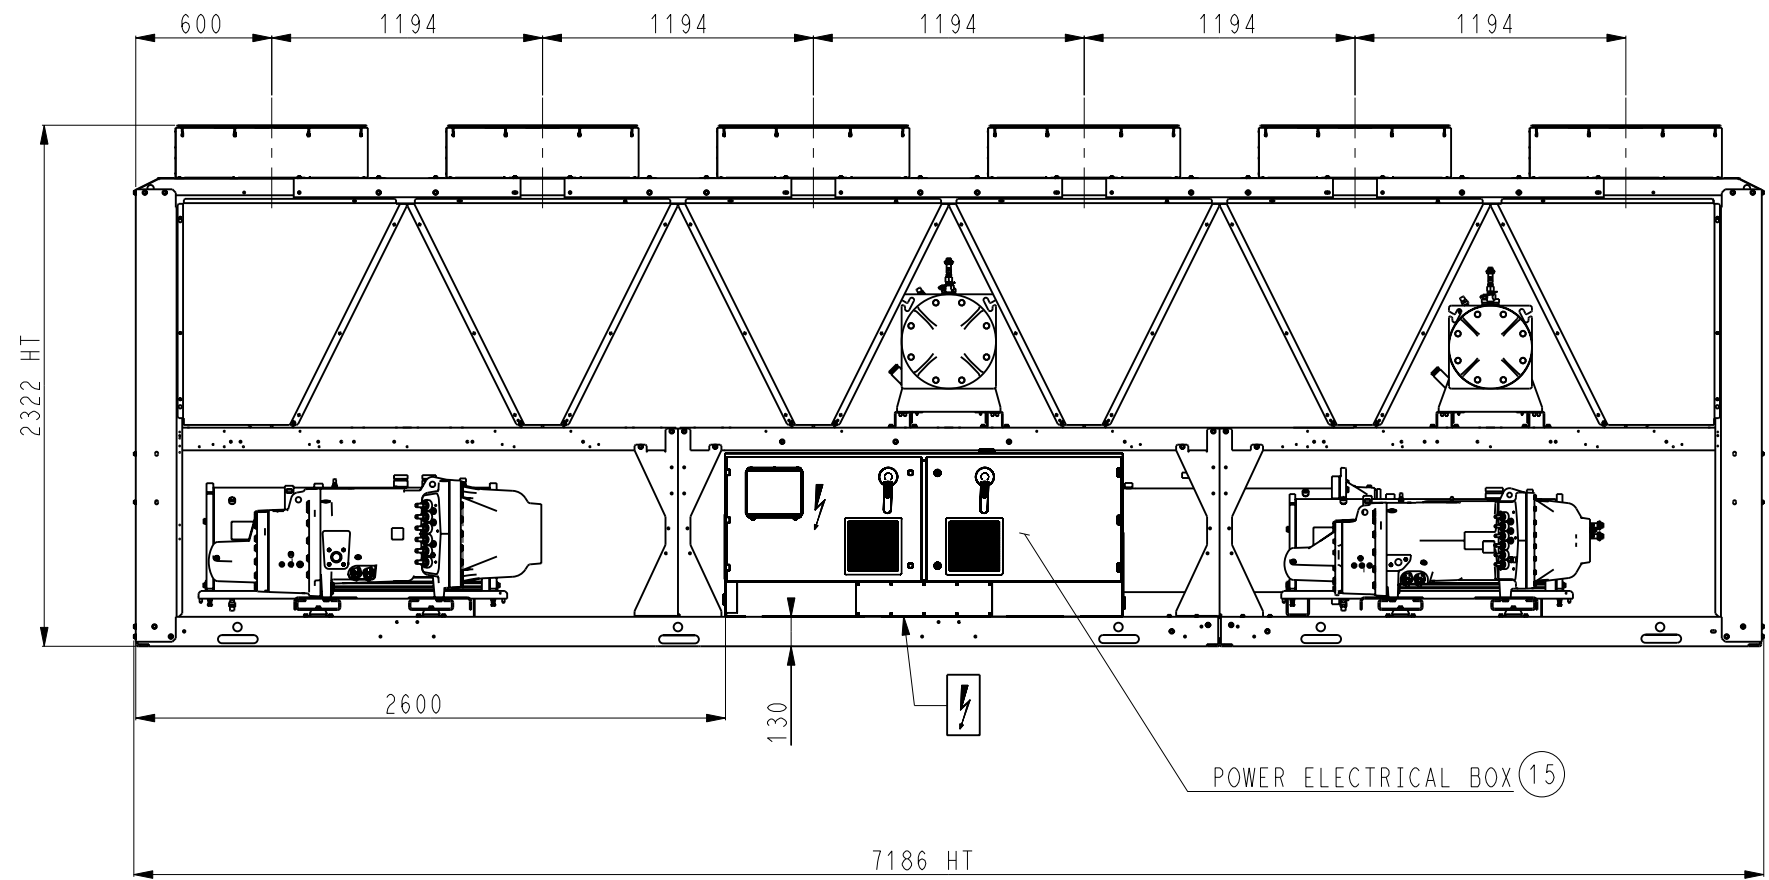



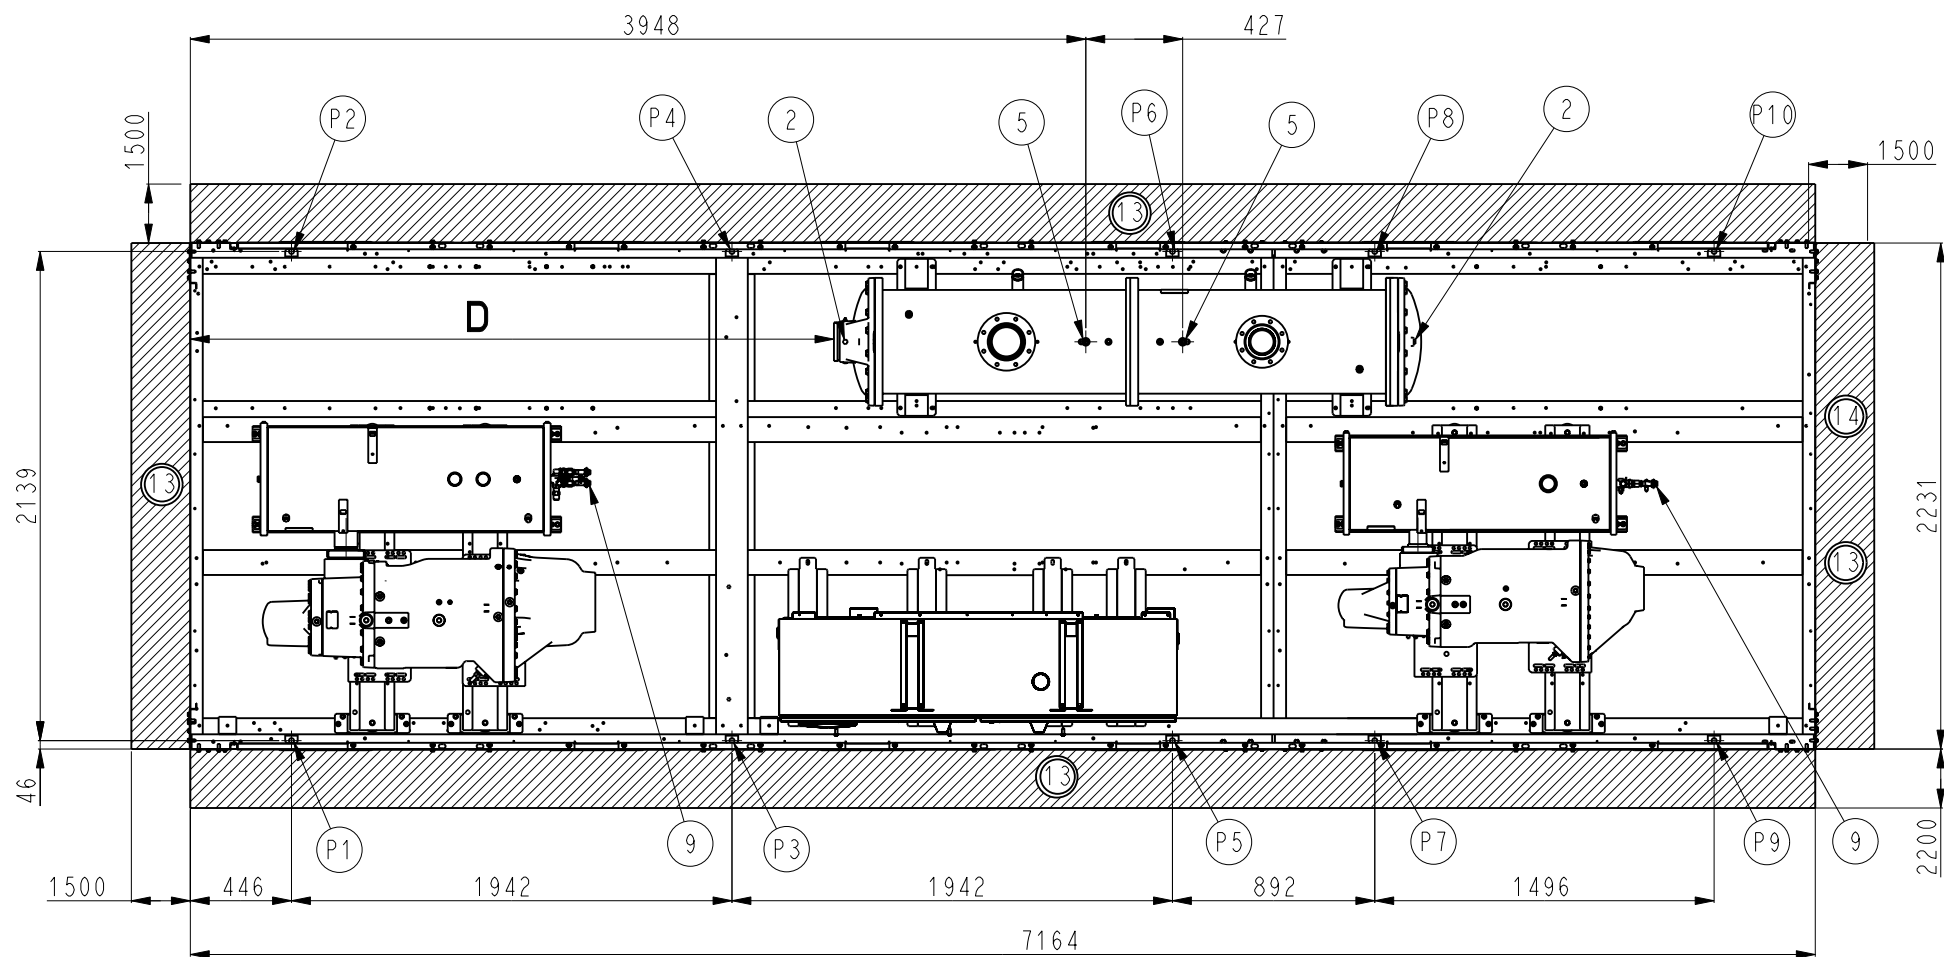


F
(VOIR F.3
SEE SHEET 3)

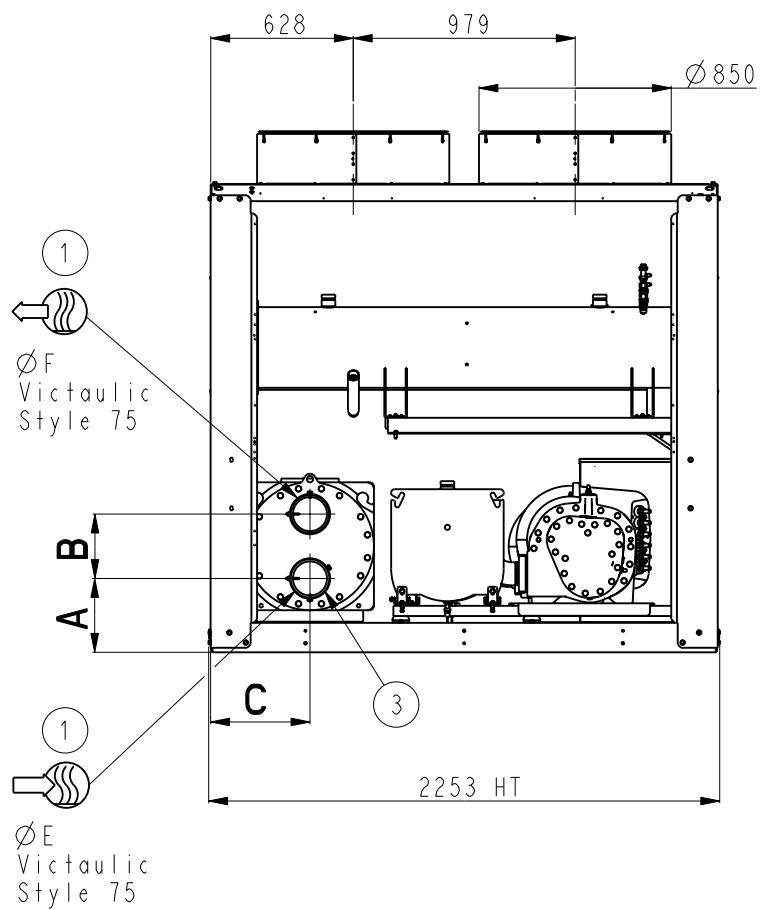

1/2" SAE M Flare

DETAIL SOUPAPE 5




5/8" SAE M Flare


DETAIL SOUPAPE 9

	30XBE0600	30XBE0700	30XBE0750	30XBE0800
A	356	372	372	325
B	272	242	242	284
C	438	438	438	438
D	2852	2852	2852	2838
ØE	141,3	168,3	168,3	168,3
ØF	141,3	168,3	168,3	168,3

SUPPLIED WITH THE UNIT


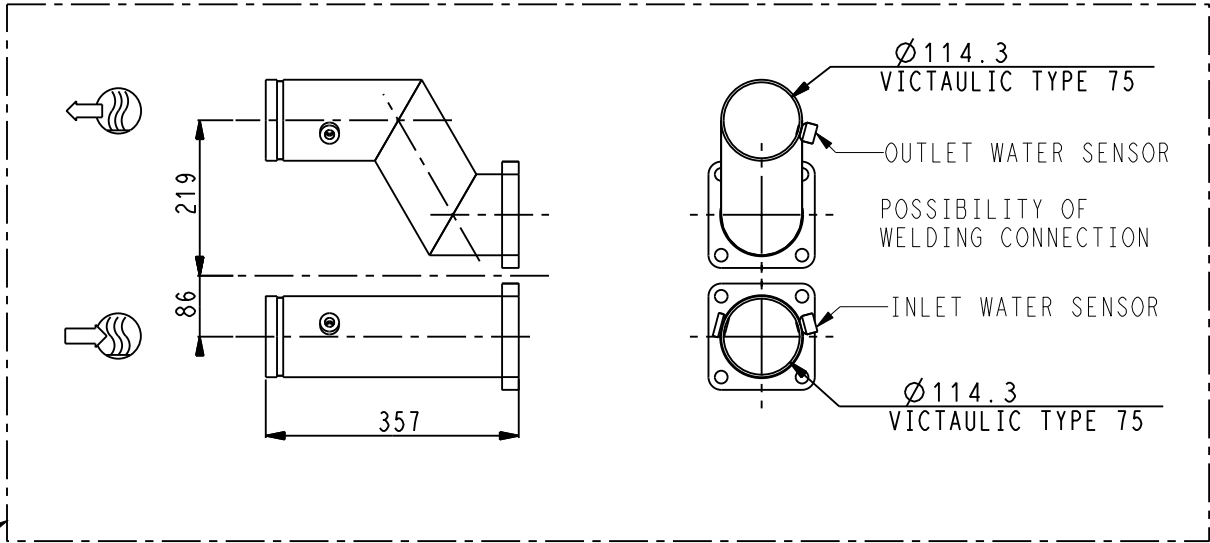


SUPPLIED WITH THE UNIT

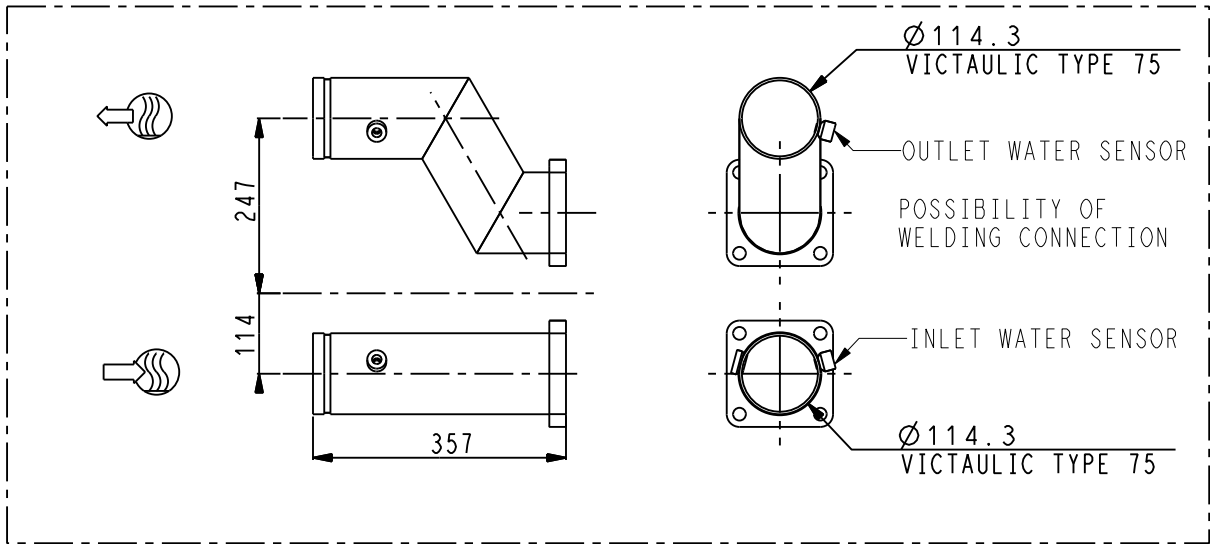

30XBE0600 CKTA/CKTB
30XBE0700 CKTA/CKTB
30XBE0750 CKTB
30XBE0800 CKTB

30XBE0750 CKTA
30XBE0800 CKTA

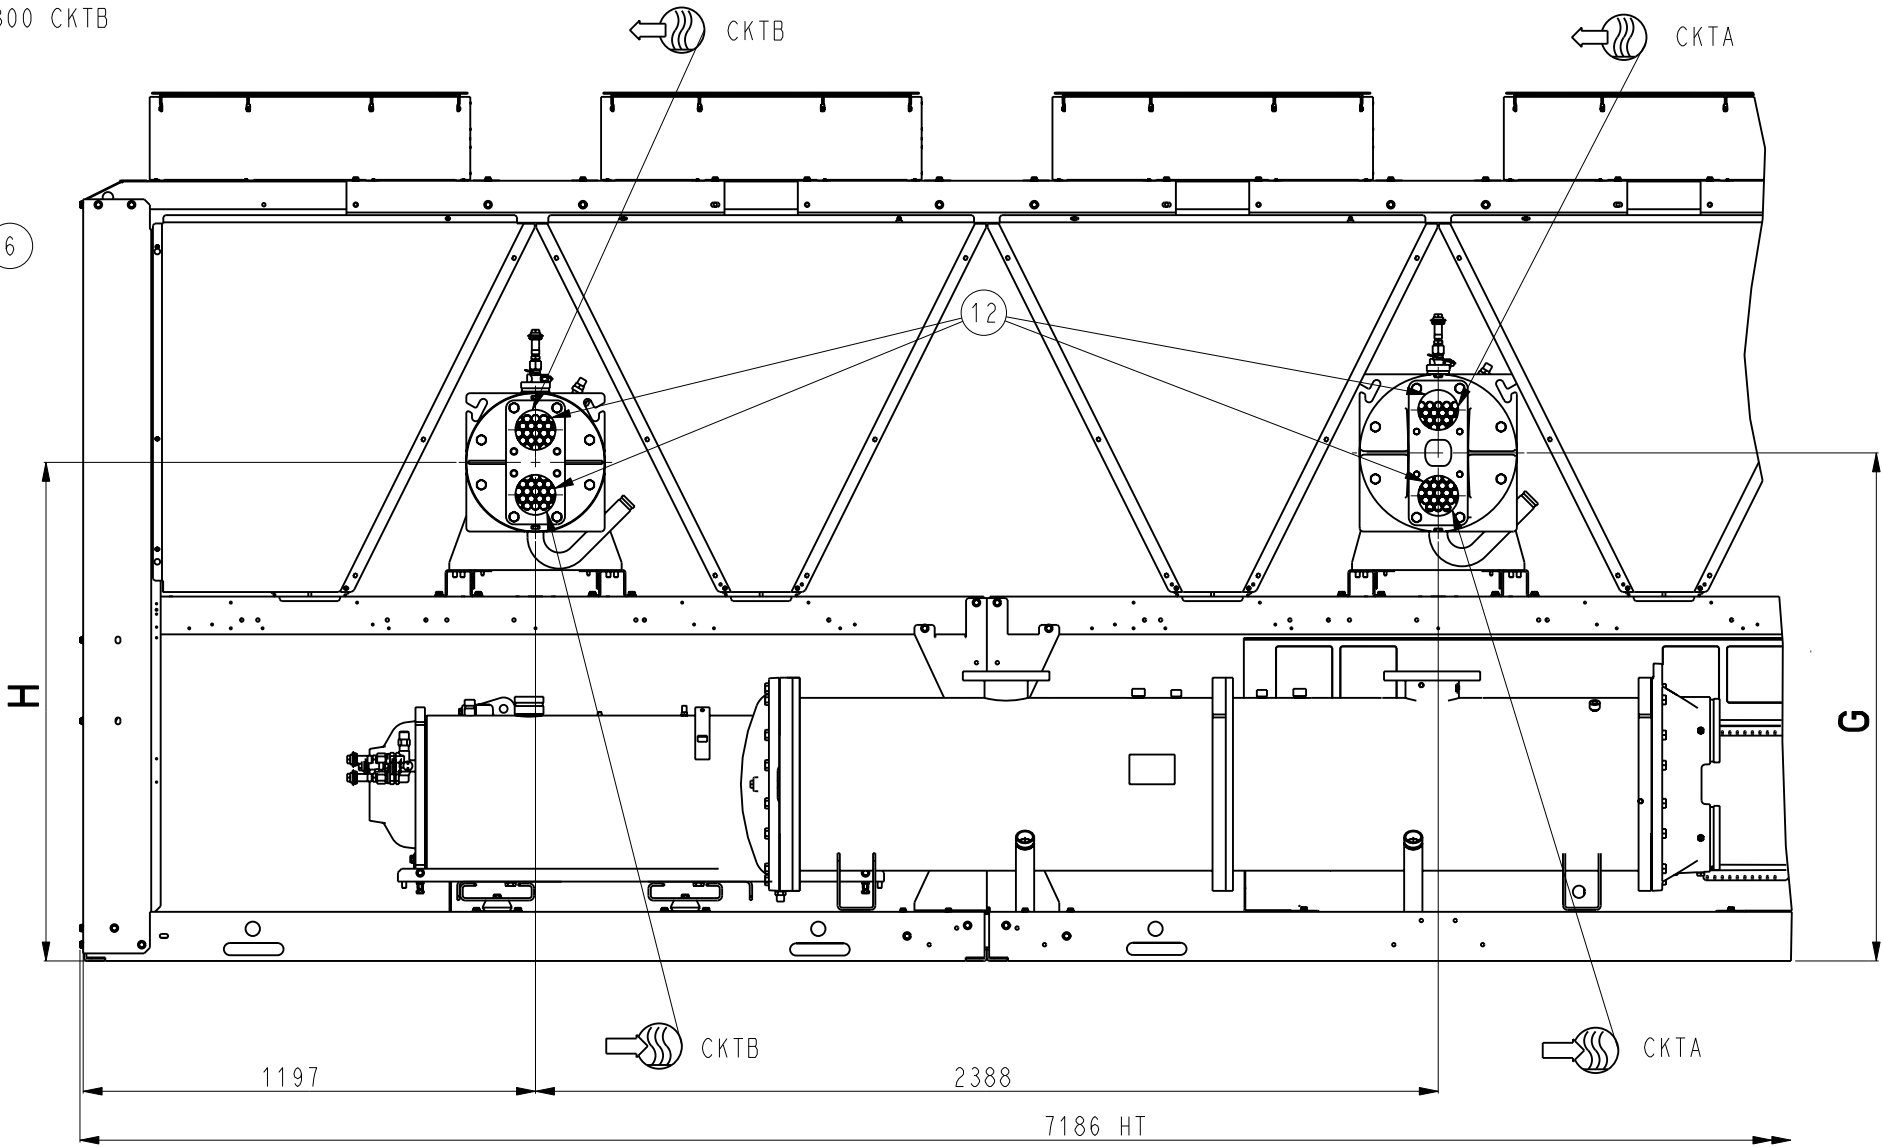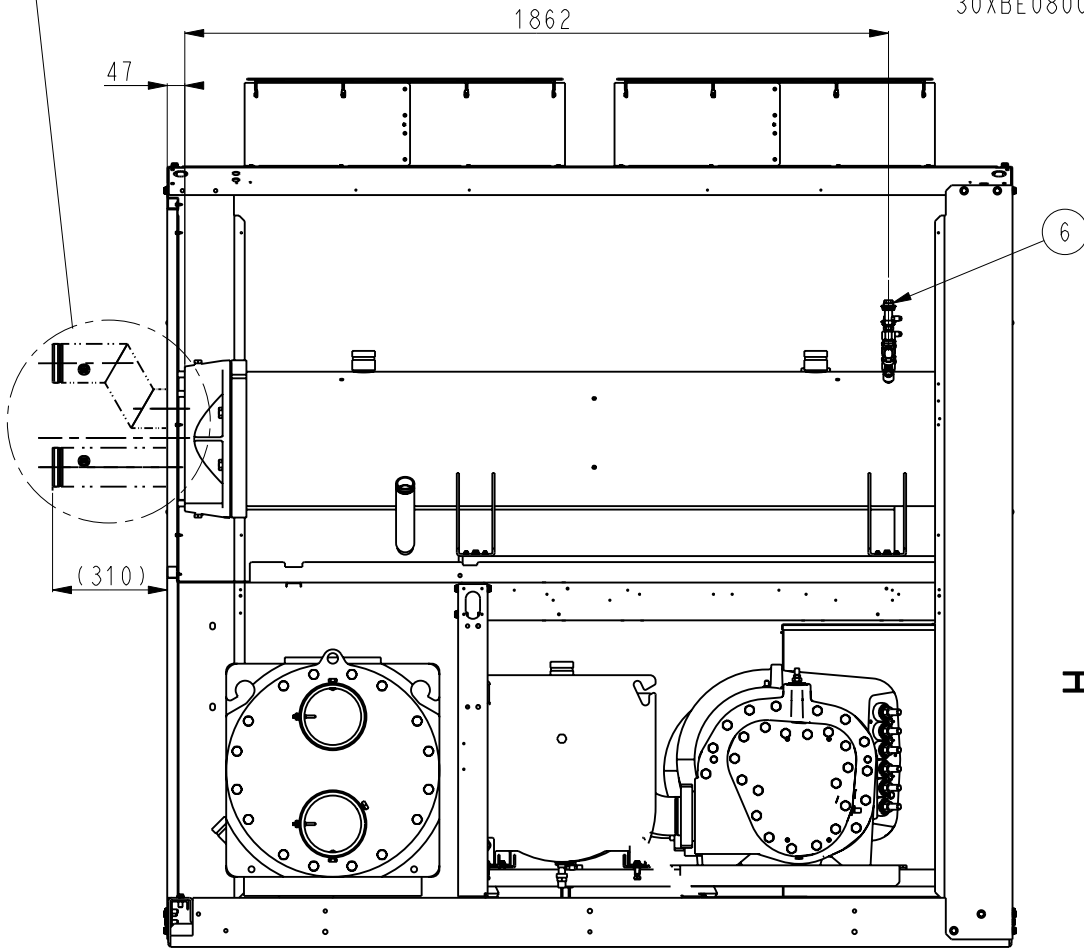






	30XBE0600	30XBE0700	30XBE0750	30XBE0800
G	1319	1319	1344	1344
H	1319	1319	1319	1319

VUE **F**
ECHELLE 1:20

TOLERANCE	30XBE0600-0700-0750-0800		DATE	Feuille
±10	OPTION 50		20-Aug-20	Sheet
				2/6
				Indice
				A

00DCG000408900

	30XBE0600	30XBE0700	30XBE0750	30XBE0800
X	3716	3634	3534	3592
Y	1085	1138	1083	1110
Z	756	883	802	784

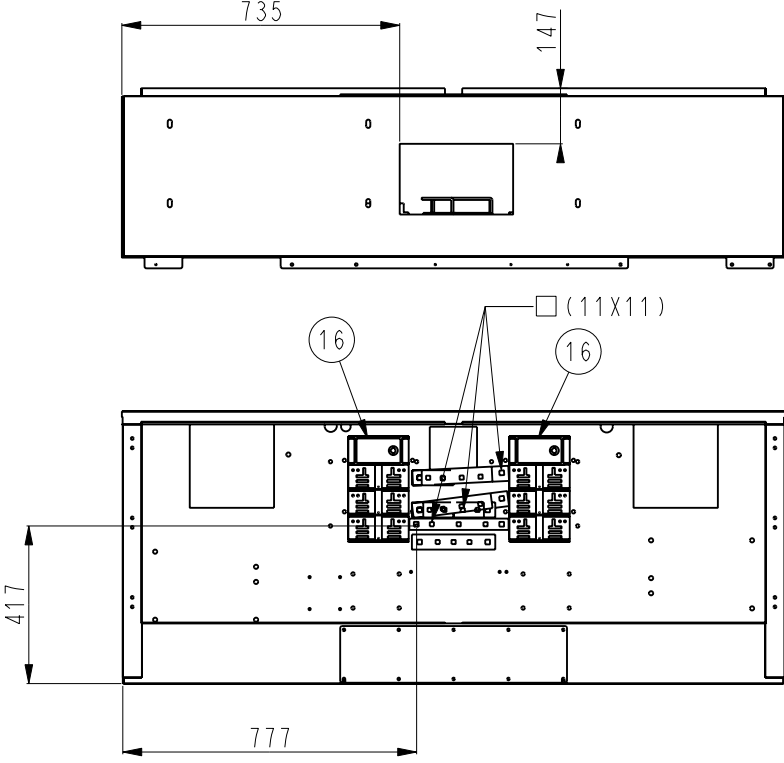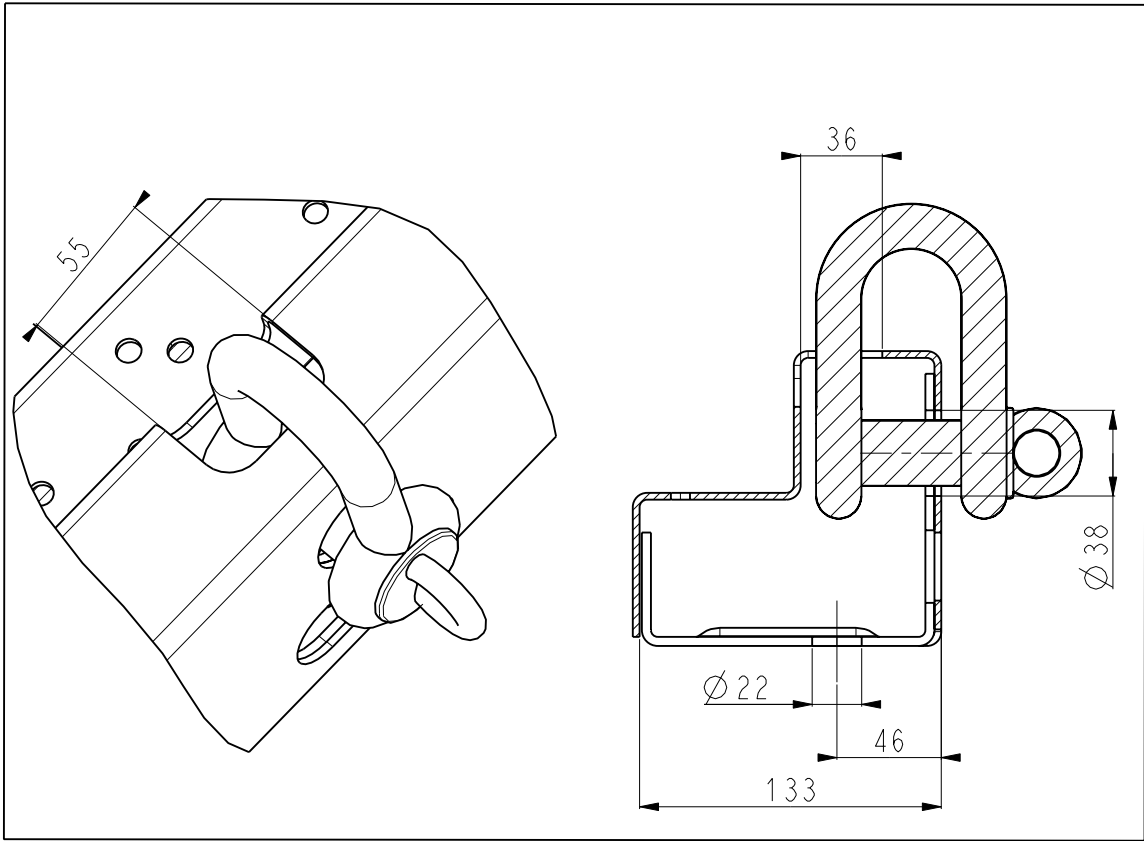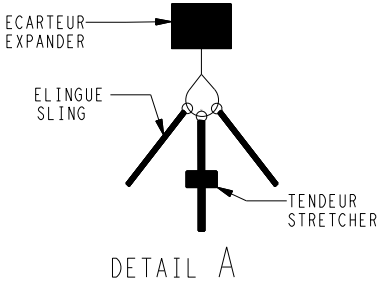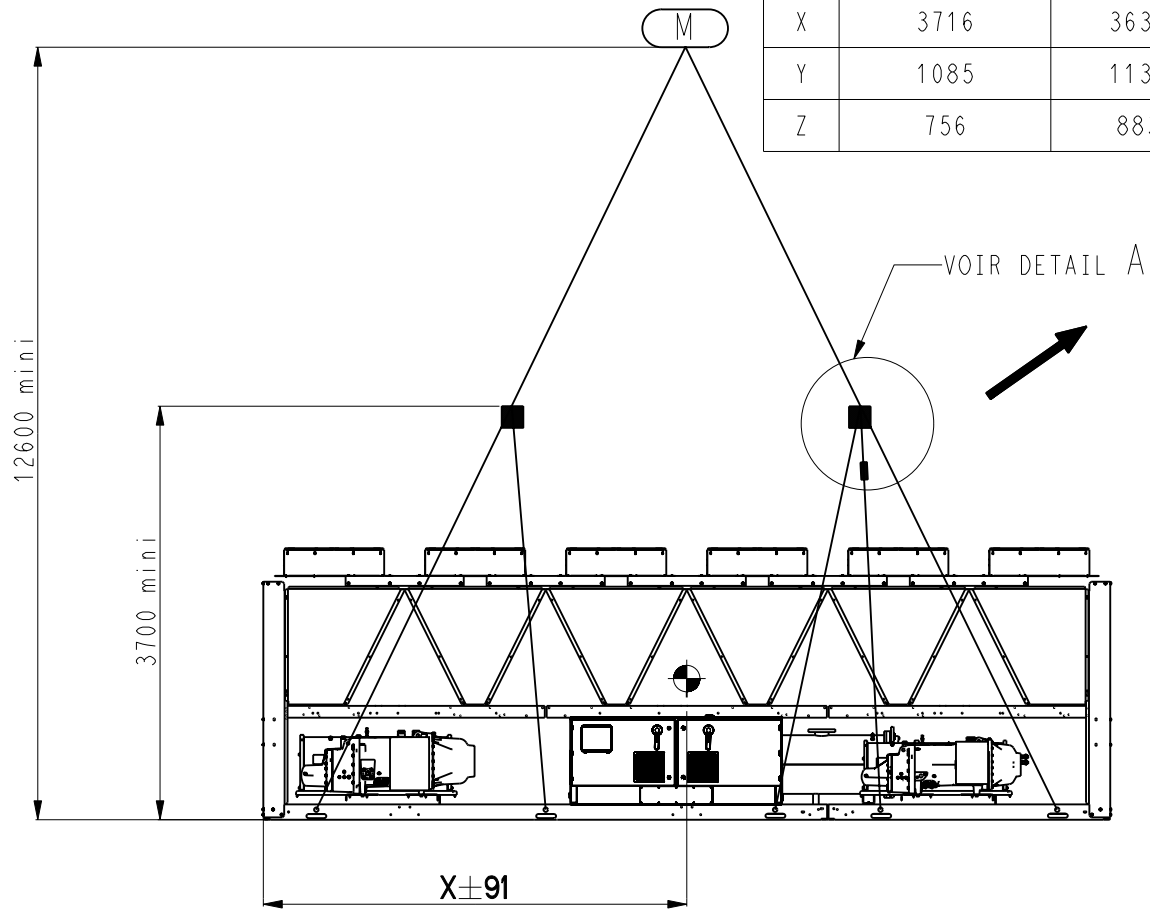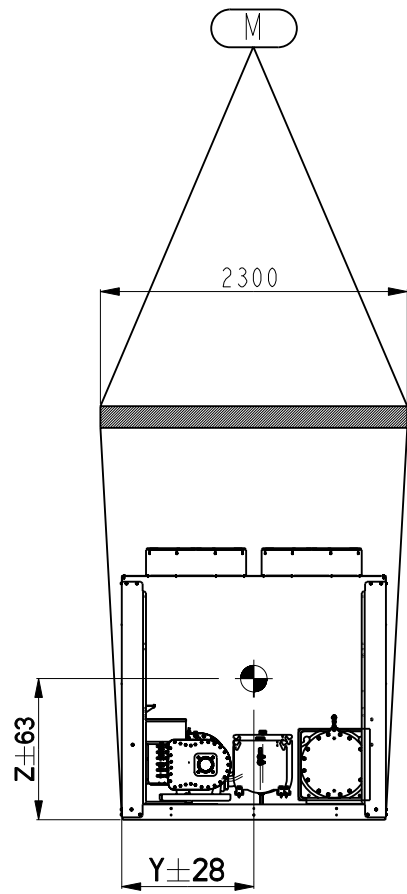


ELECTRICAL BOX: POWER CONNECTION

A400


TOLERANCE	30XBE0600-0700-0750-0800 ±10	OPTION 50		DATE 20-Aug-20	Feuille Sheet 3/6 Indice A

00DCG000408900


OPT 266

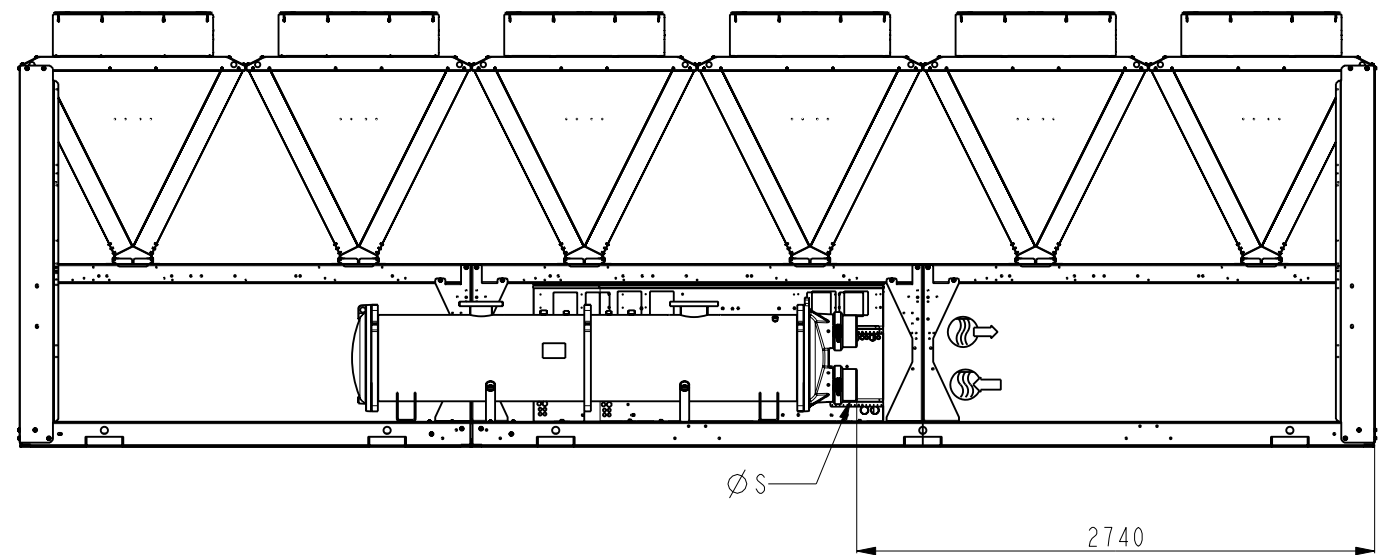


OPT 266:100C

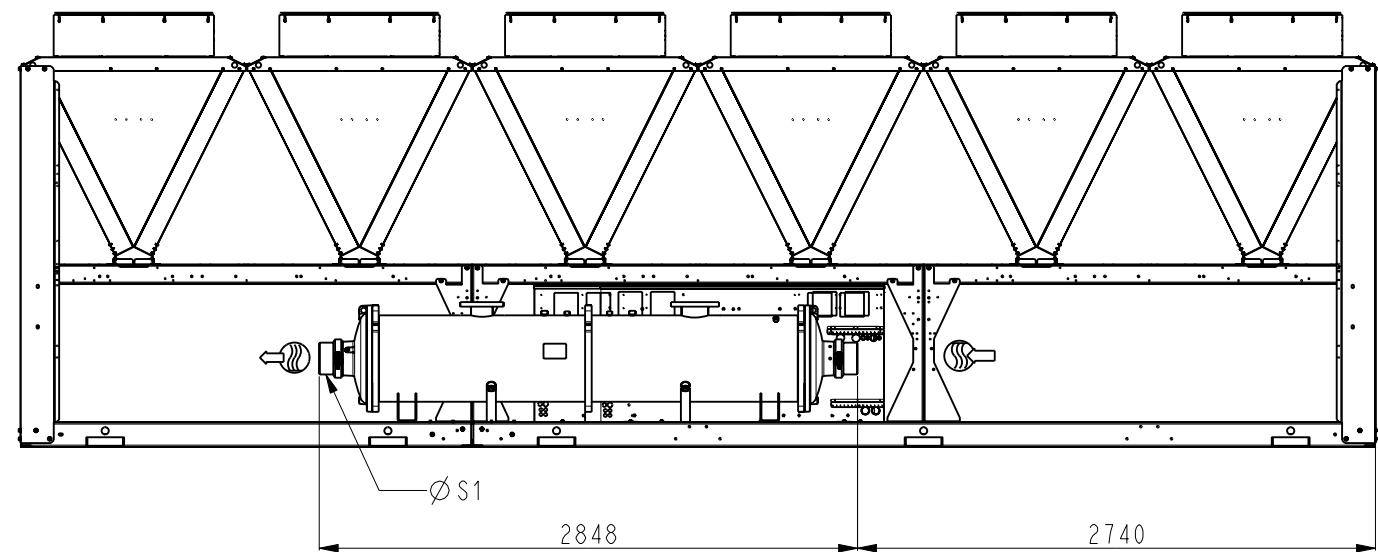

OPT 266:107

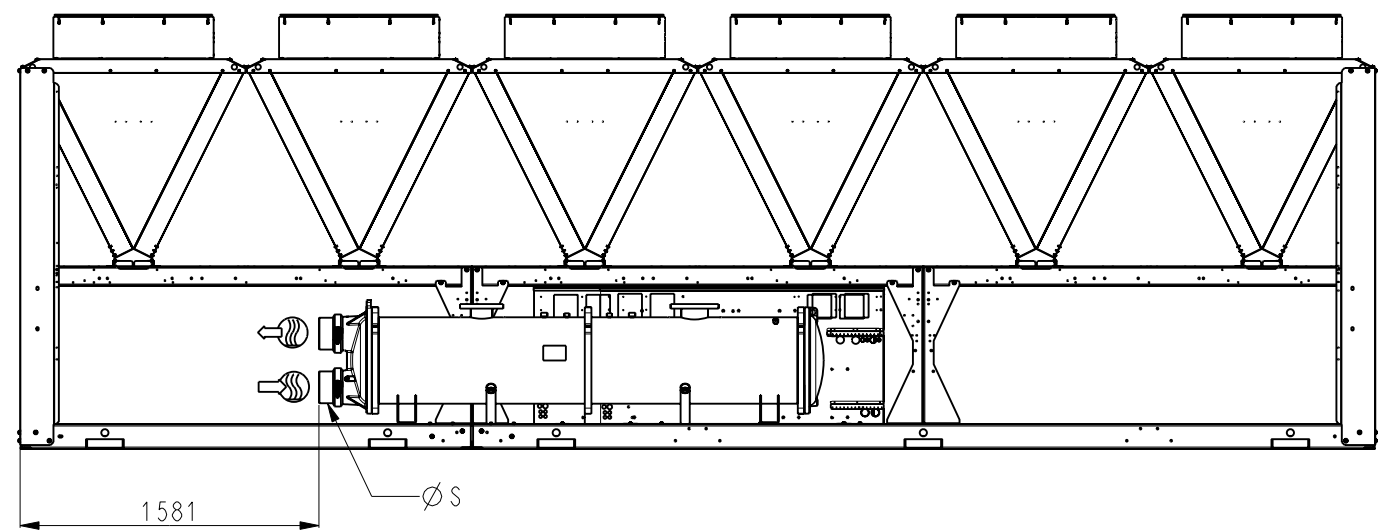


OPT 266:100C+107

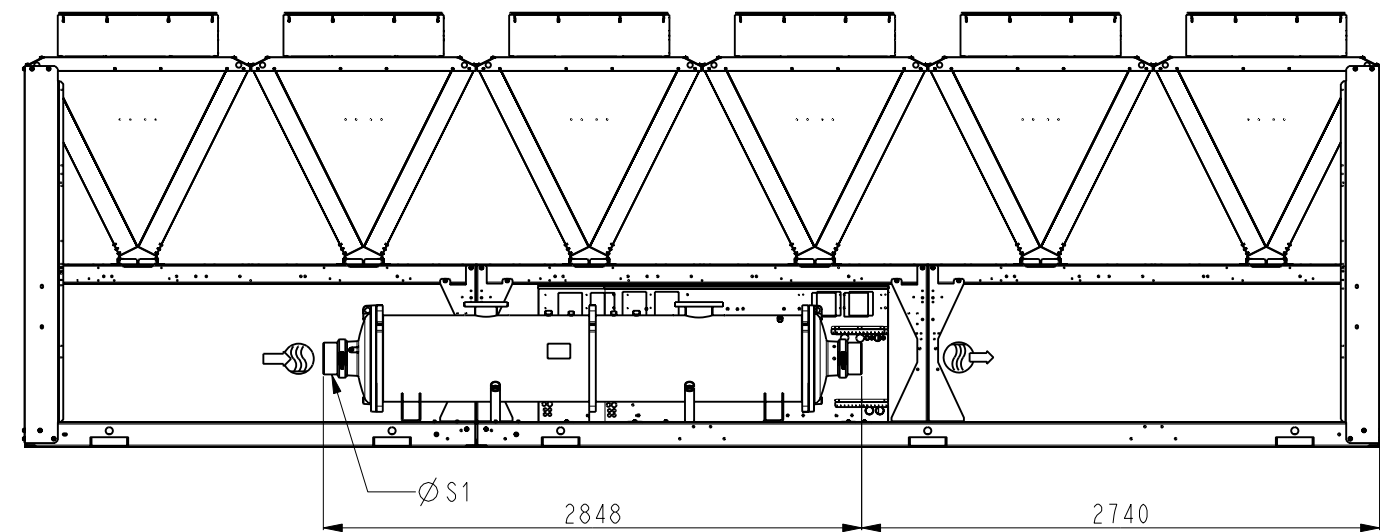


	Ø S mm	Ø S1 mm	Ø S2 mm
30XBE0600	141.3	168.3	141.3
30XBE0700-0750-0800	168.3	168.3	141.3

TOLERANCE	30XBE0600-0700-0750-0800		DATE	Feuille Sheet
±10	OPTION 50		20-Aug-20	4/6
		00DCG000408900		Indice A

OPT (5 OR 6 OR 100A) + 266

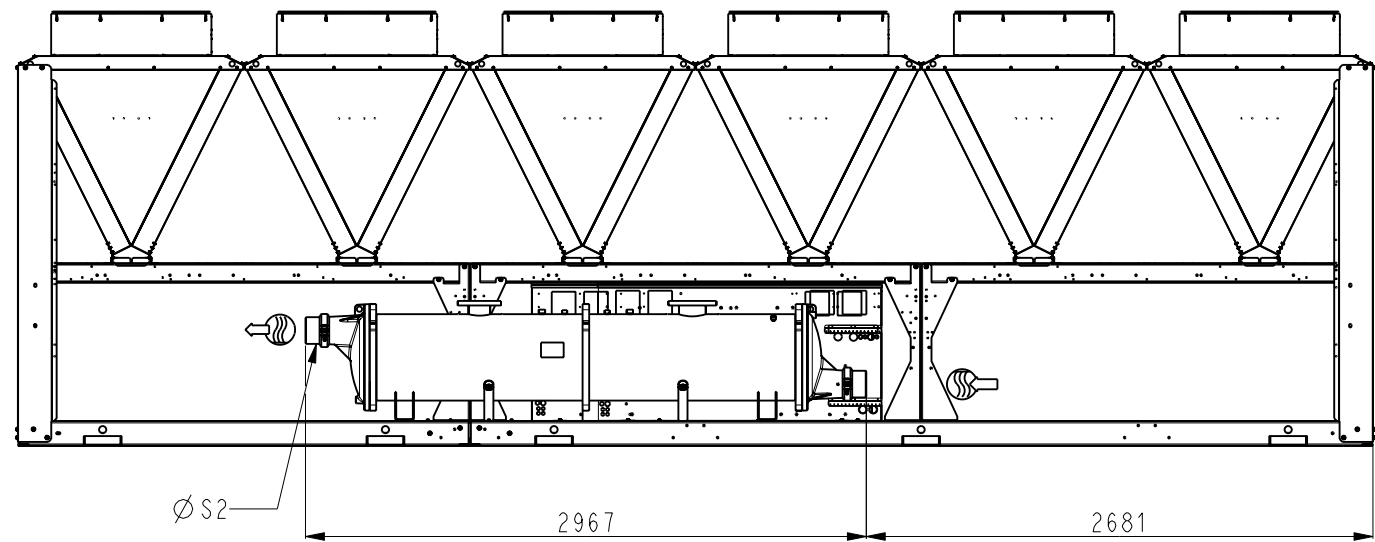

OPT (5+107 OR 6+107 OR 100A+107) + 266

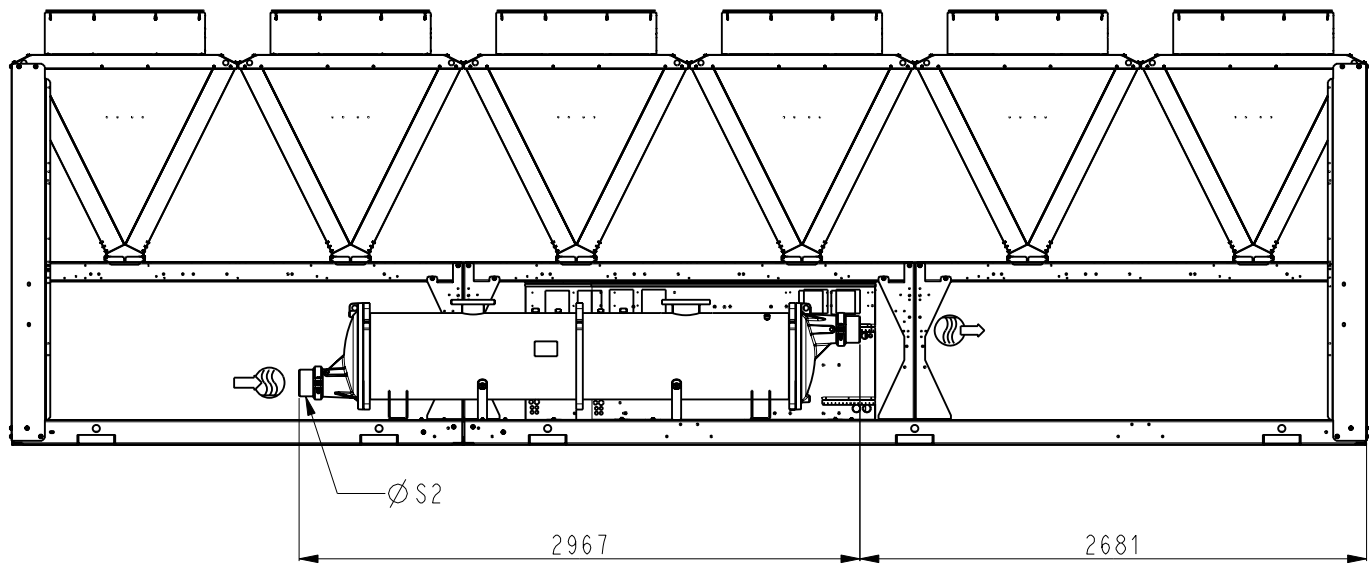

	Ø S mm	Ø S1 mm	Ø S2 mm
30XBE0600	141.3	168.3	141.3
30XBE0700-0750-0800	168.3	168.3	141.3

