




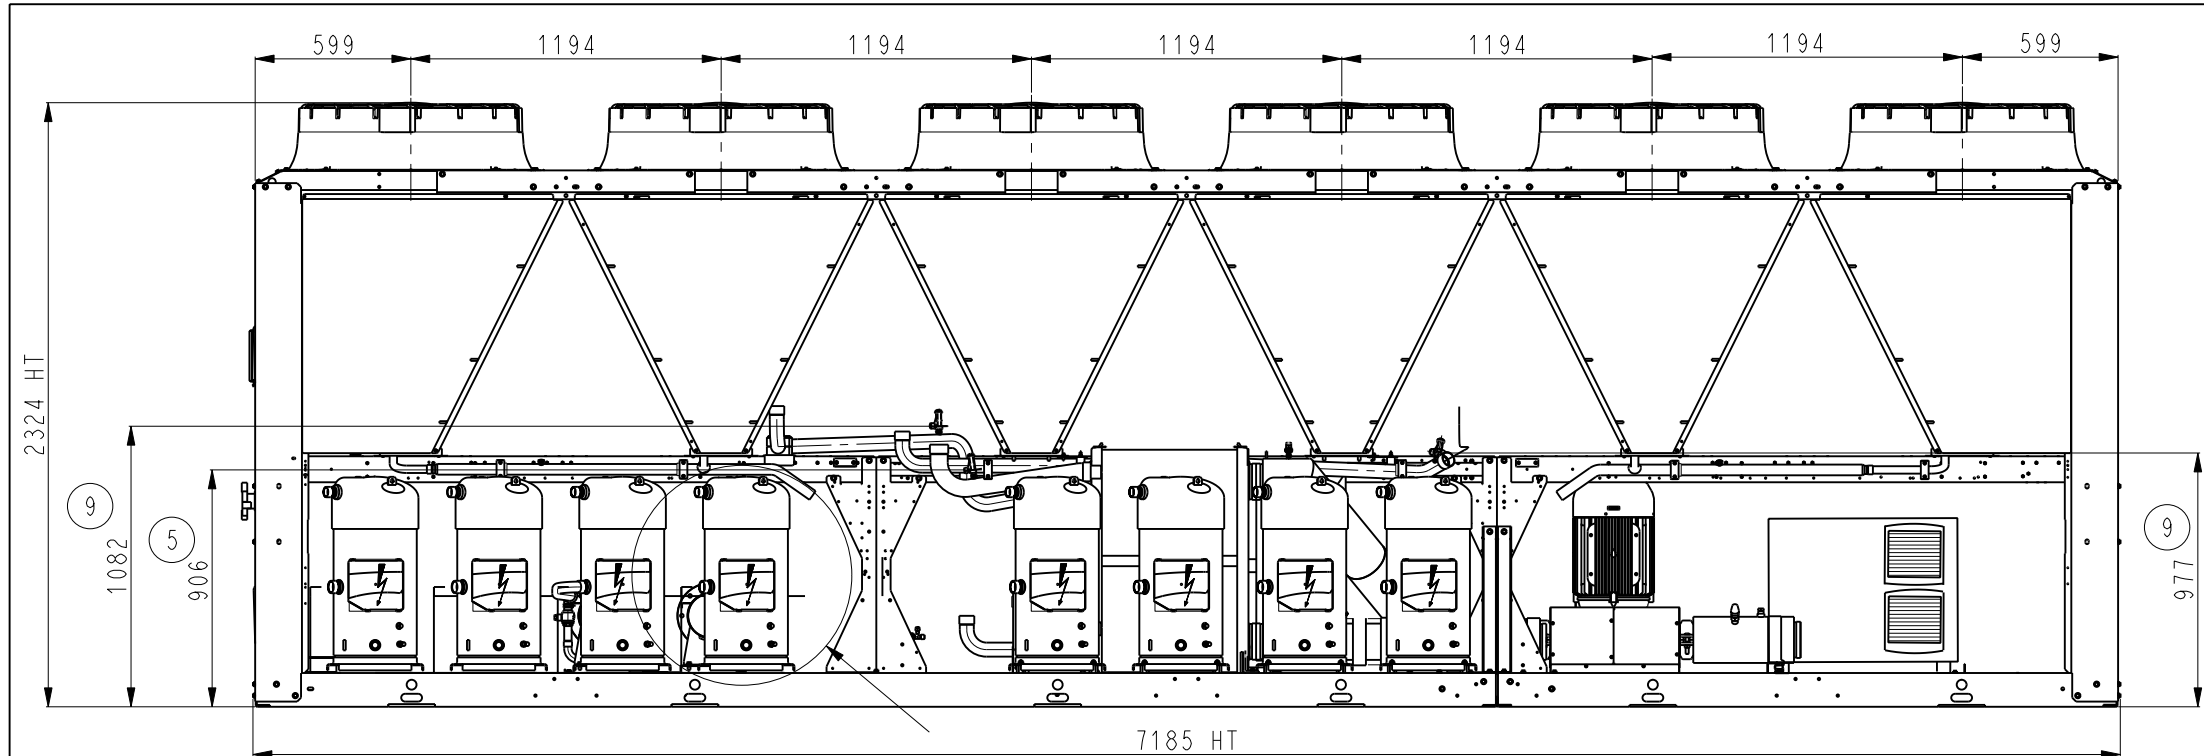


VOIR DETAIL G
SEE DETAIL
FEUILLE/SHEET 4

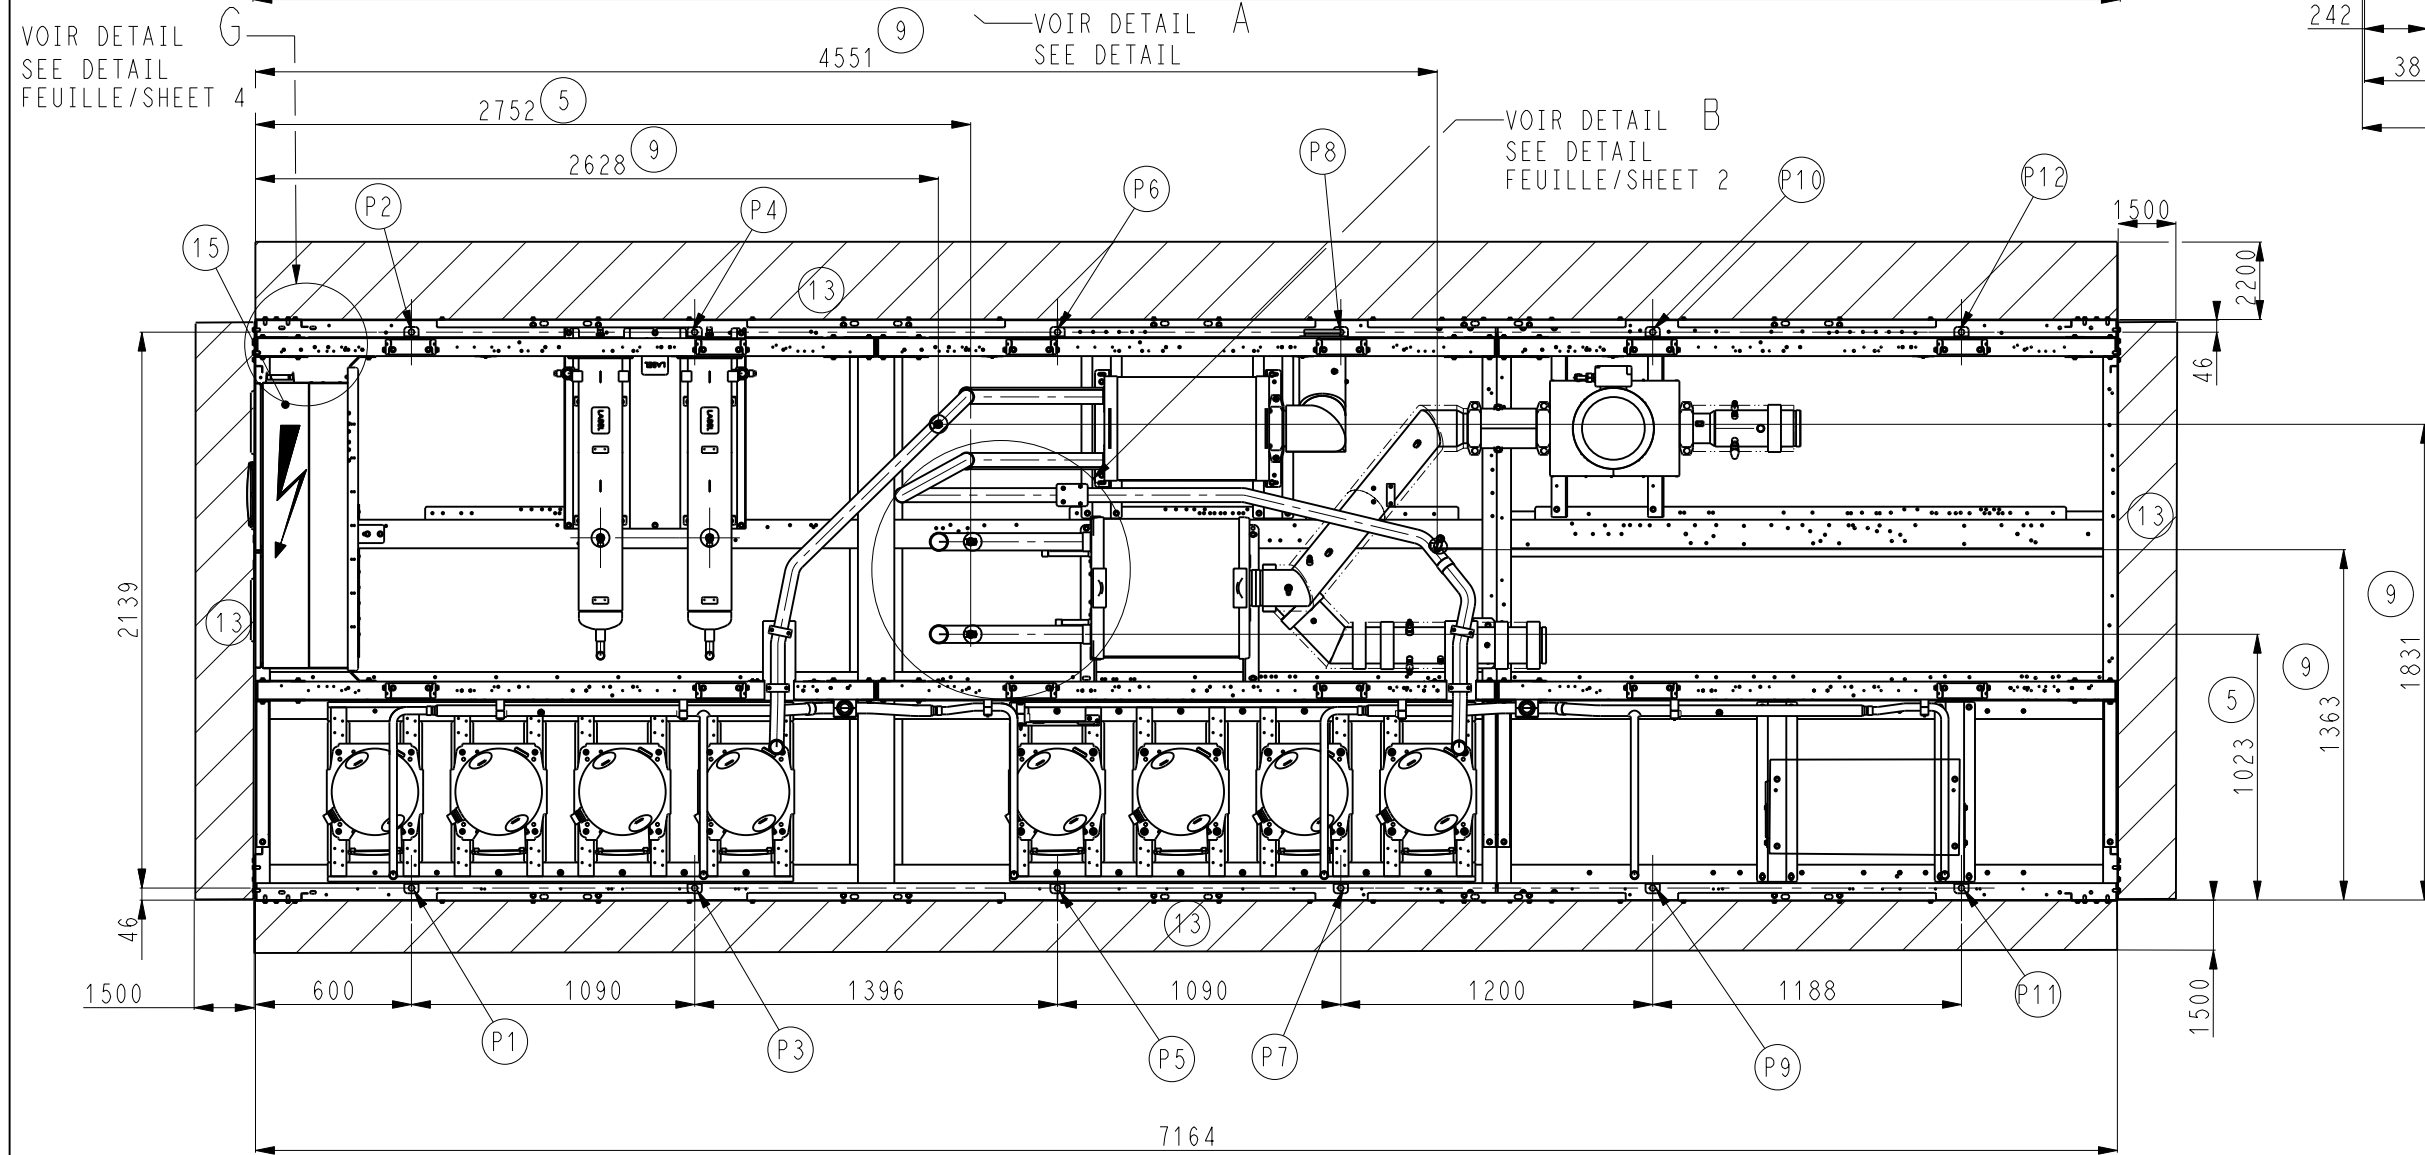


VOIR DETAIL A
SEE DETAIL

VOIR DETAIL B
SEE DETAIL
FEUILLE/SHEET 2

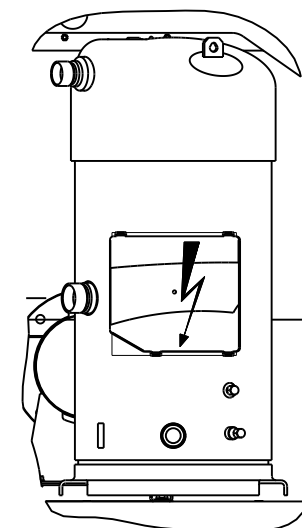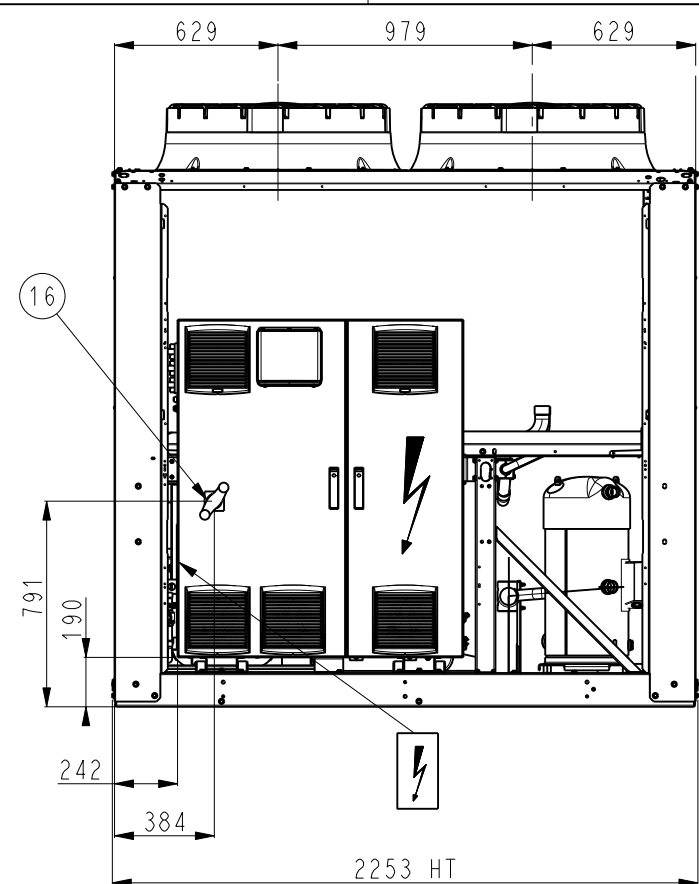




DETAIL A
ECHELLE 13:160

DETAIL SOUPAPE 5 & 9

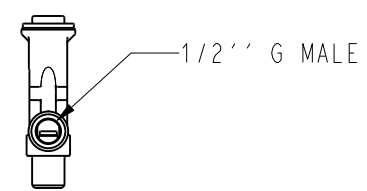




TOLERANCE	30RBP 770R -----> 950R		DATE	Feuille Sheet 1/7
±10	OPT 50 + 116V/W		24-Feb-23	Indice
		00DCG000458000		B

OPT 116V

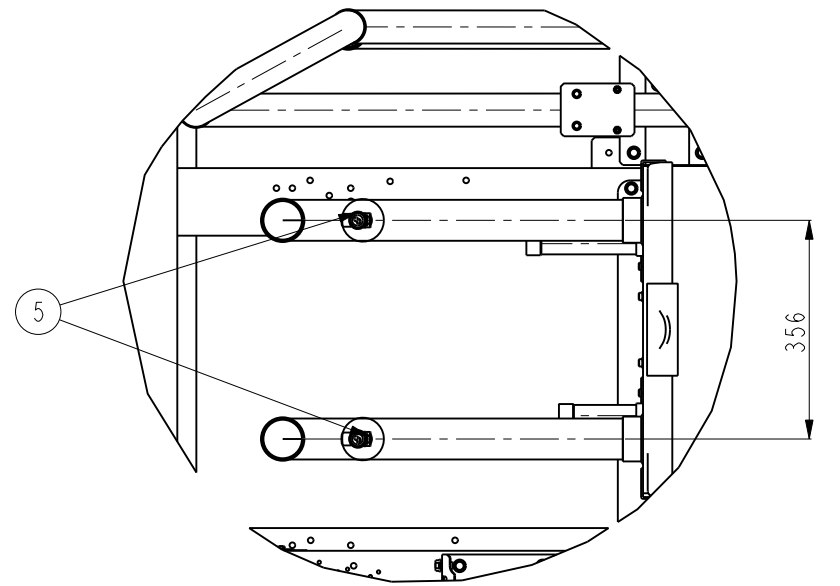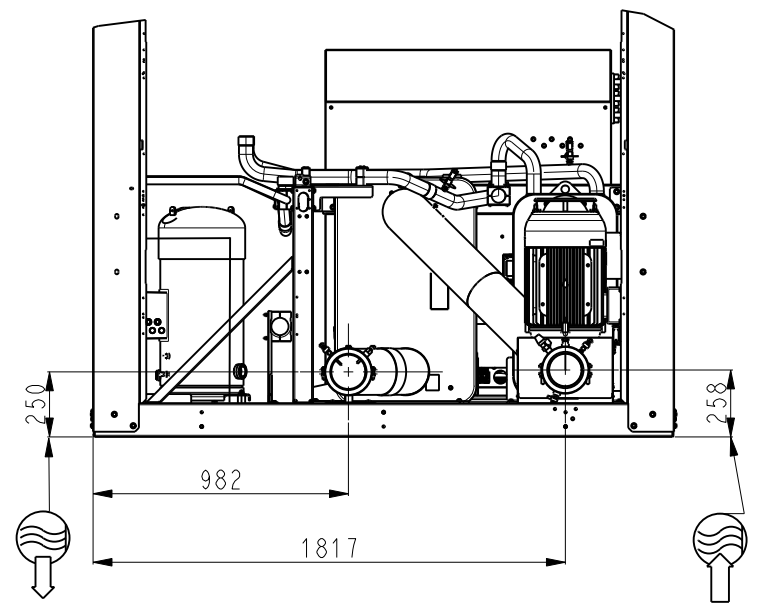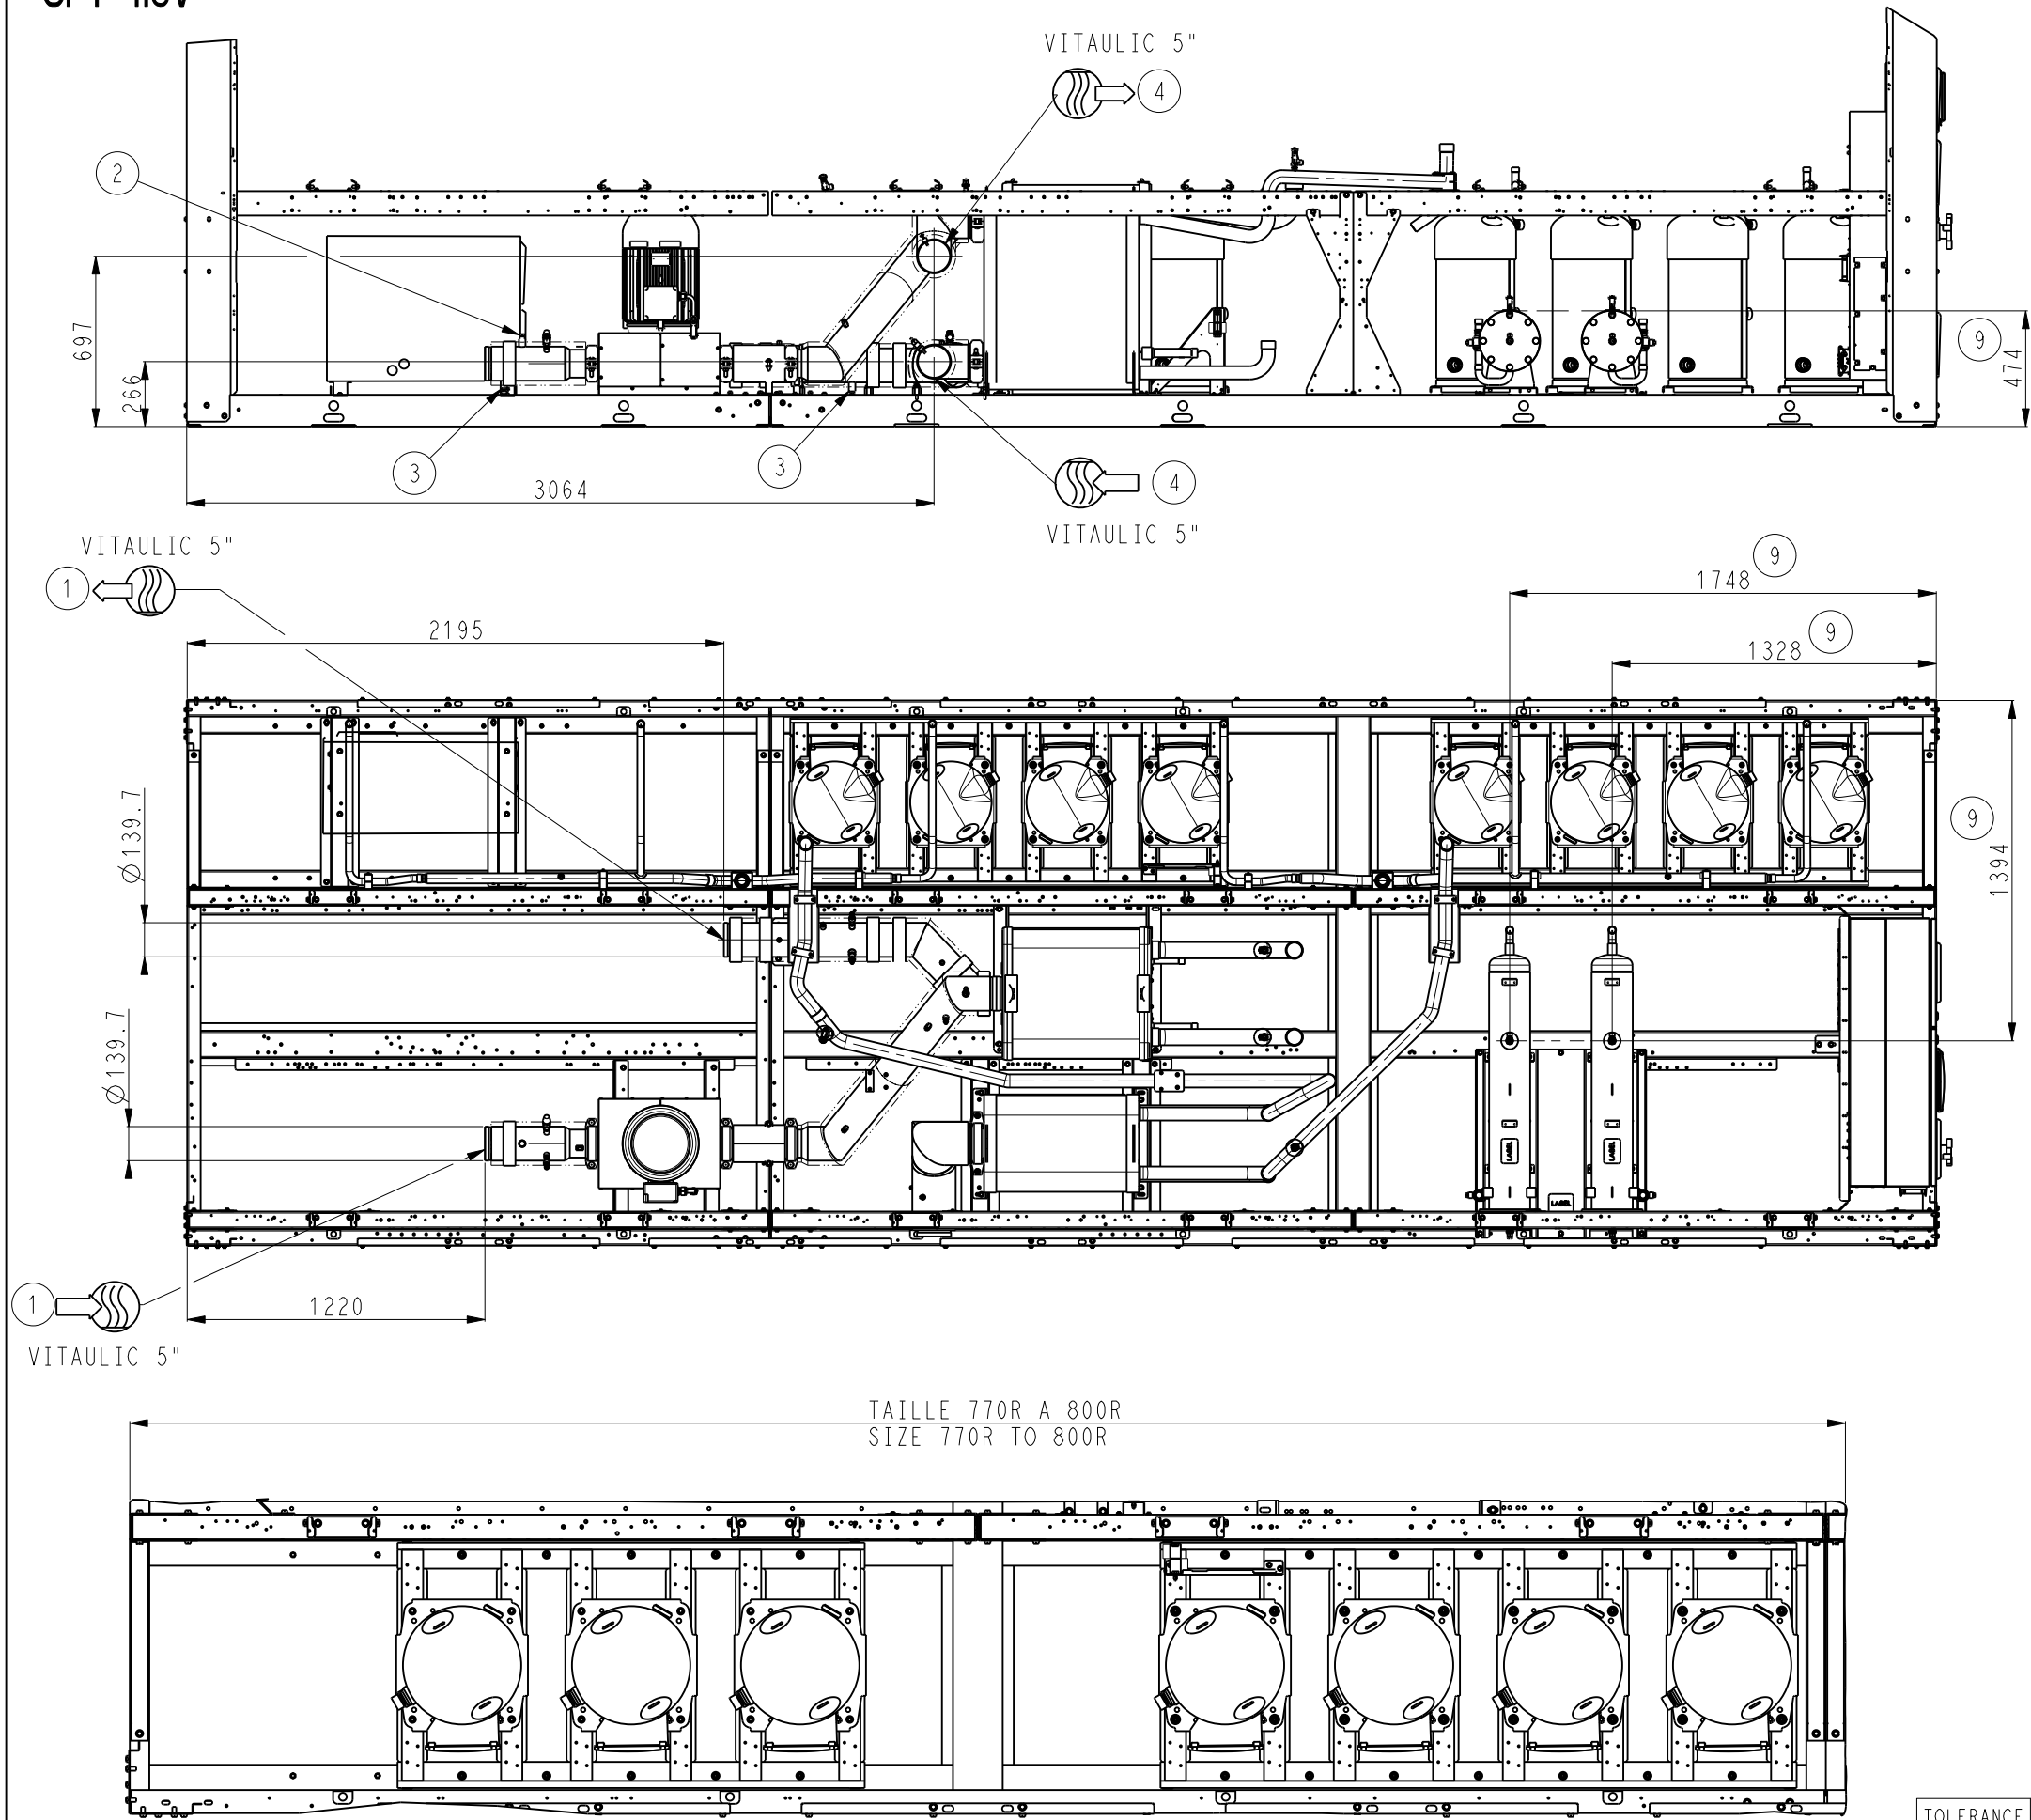


DETAIL B
Echelle 13:160

TOLERANCE	30RBP 770R -----> 950R	DATE	24-Feb-23	Feuille Sheet 2/7
±10	OPT 50 + 116V/W			Indice
		00DCG000458000		B

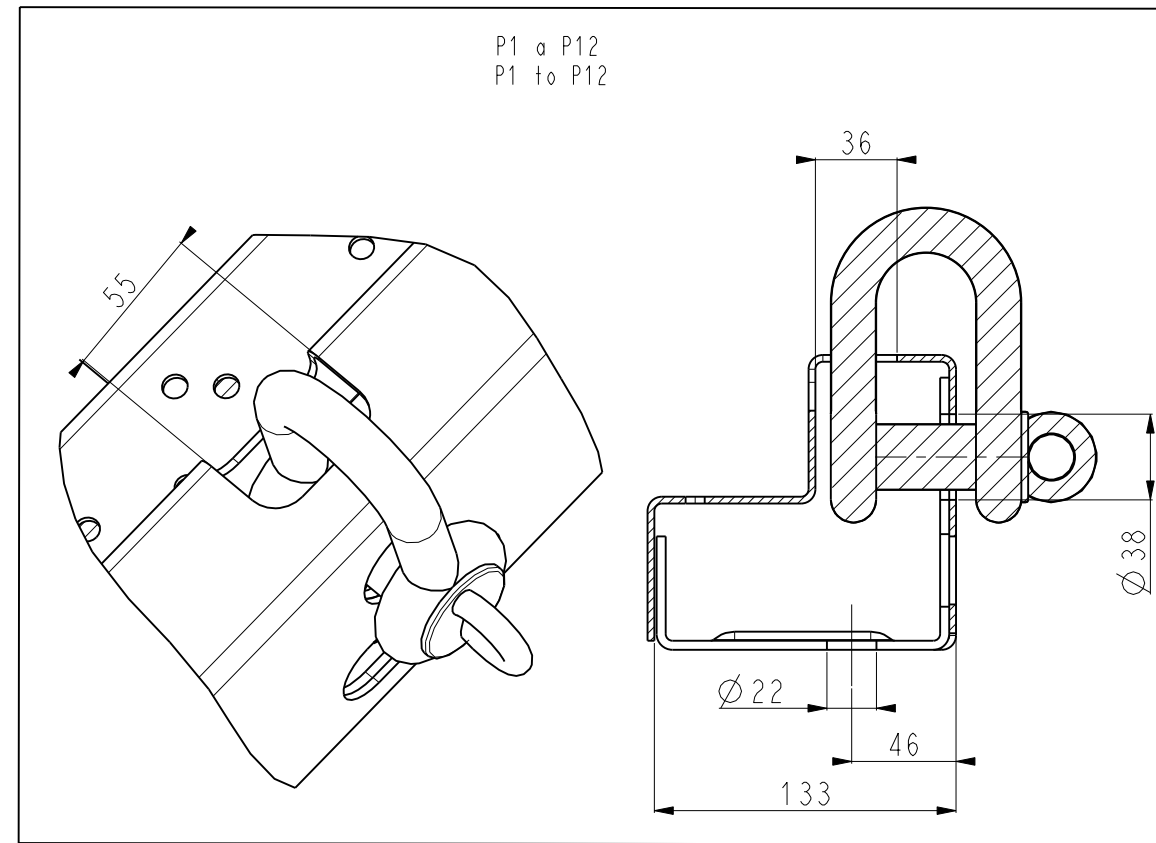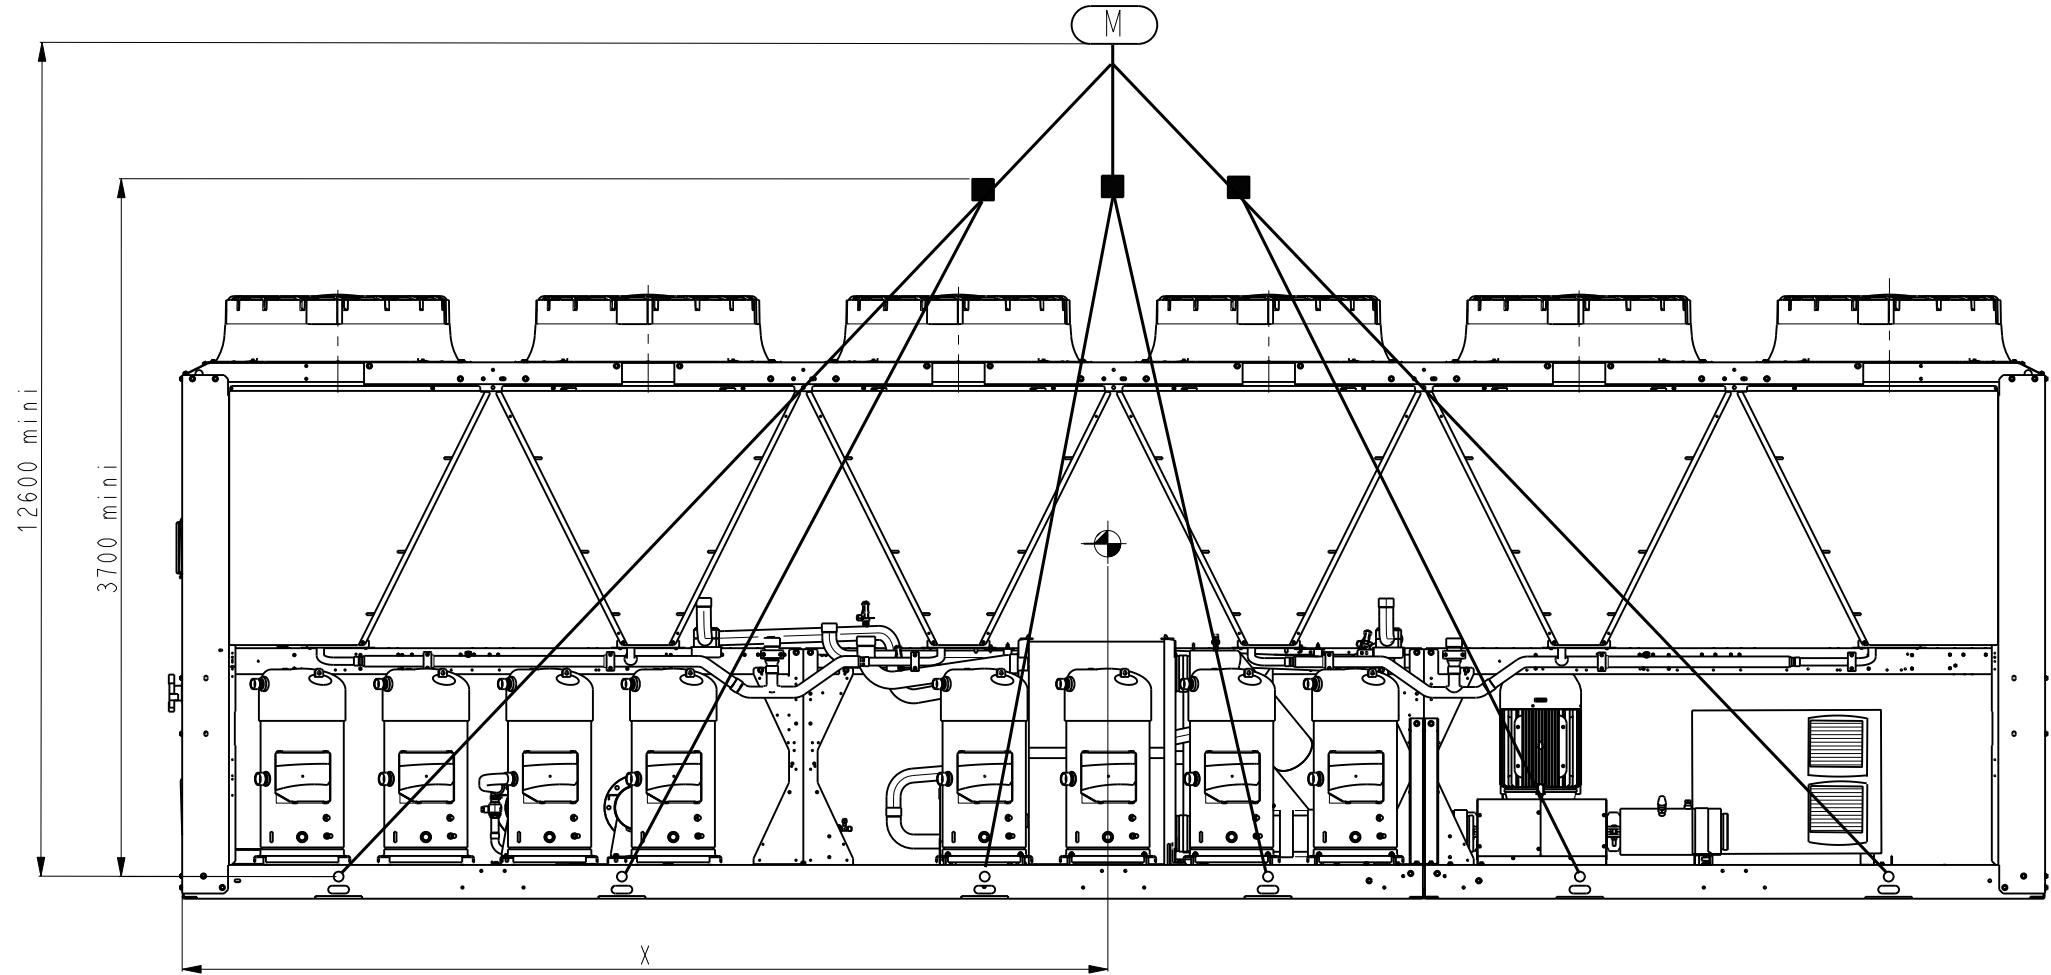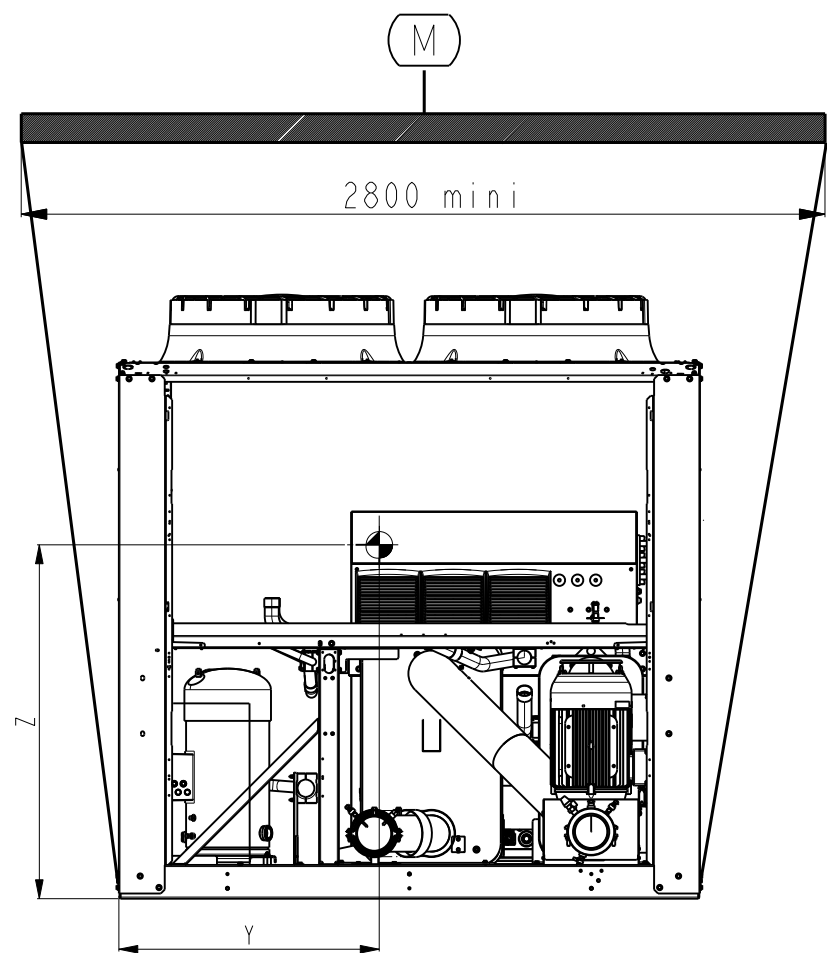



X (mm)	Y (mm)	Z (mm)
3150±250	906±75	930±35

STANDARD

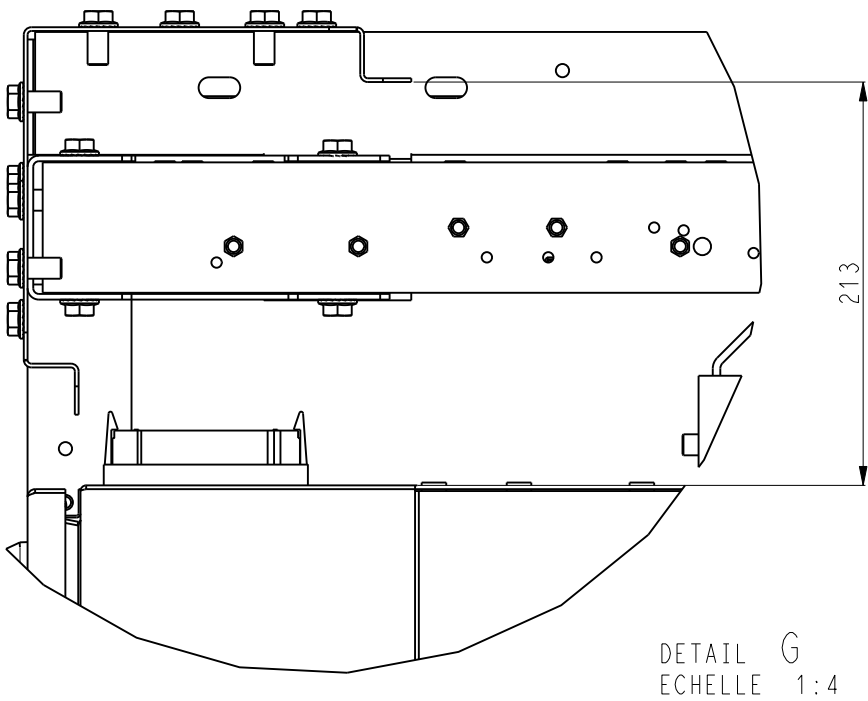


3 TROUS Ø11.0
HOLES

2x PE CLIENT FILETE M8
PE CUSTOMER THREADED M8


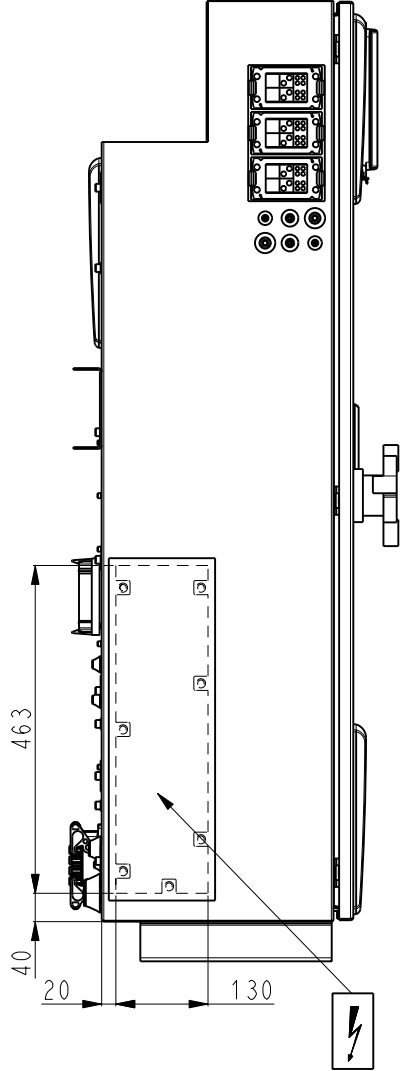
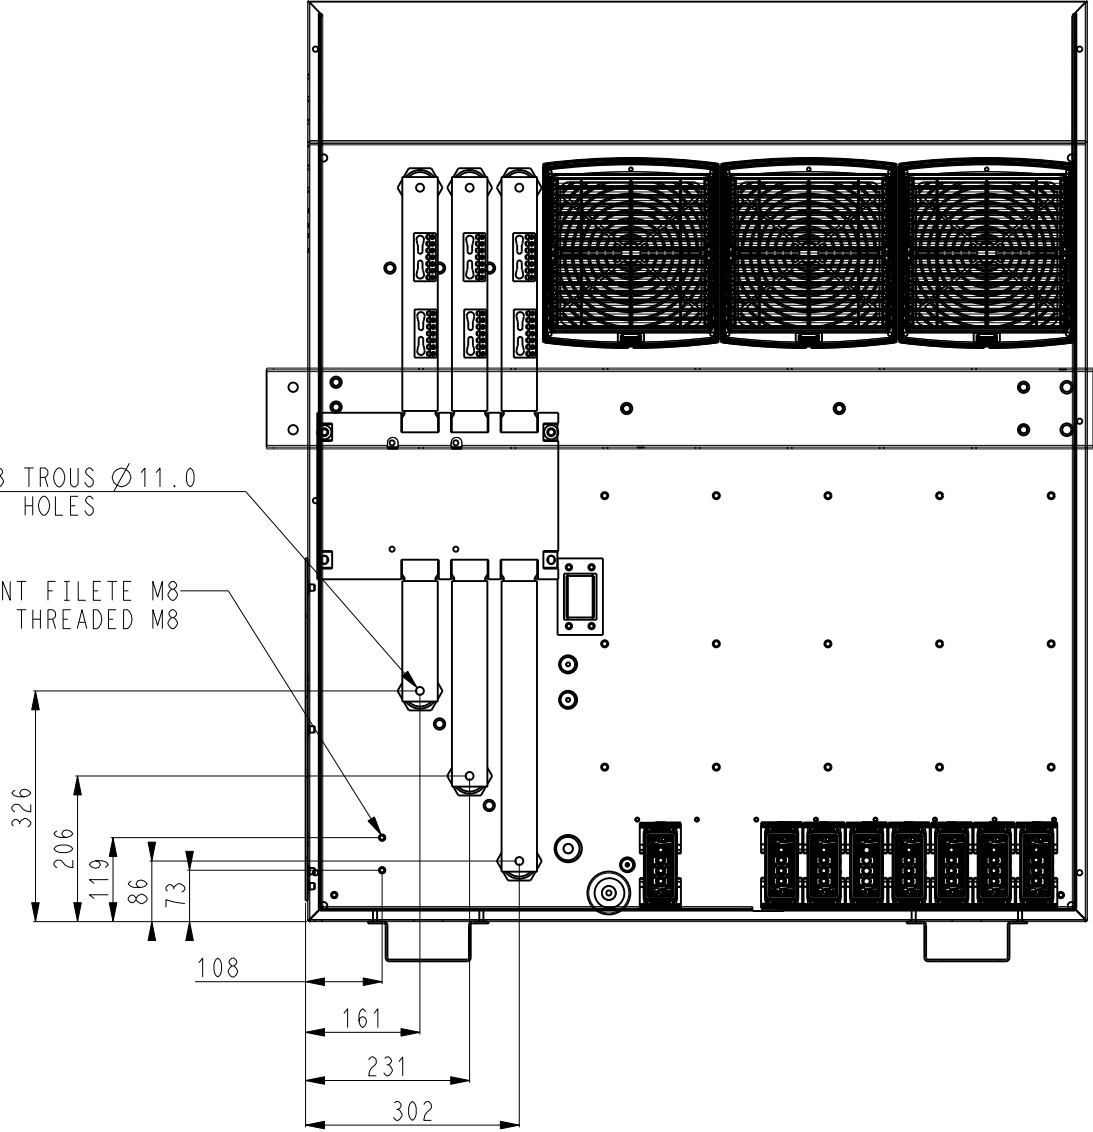


OPT 266 / 267
OPT 116V

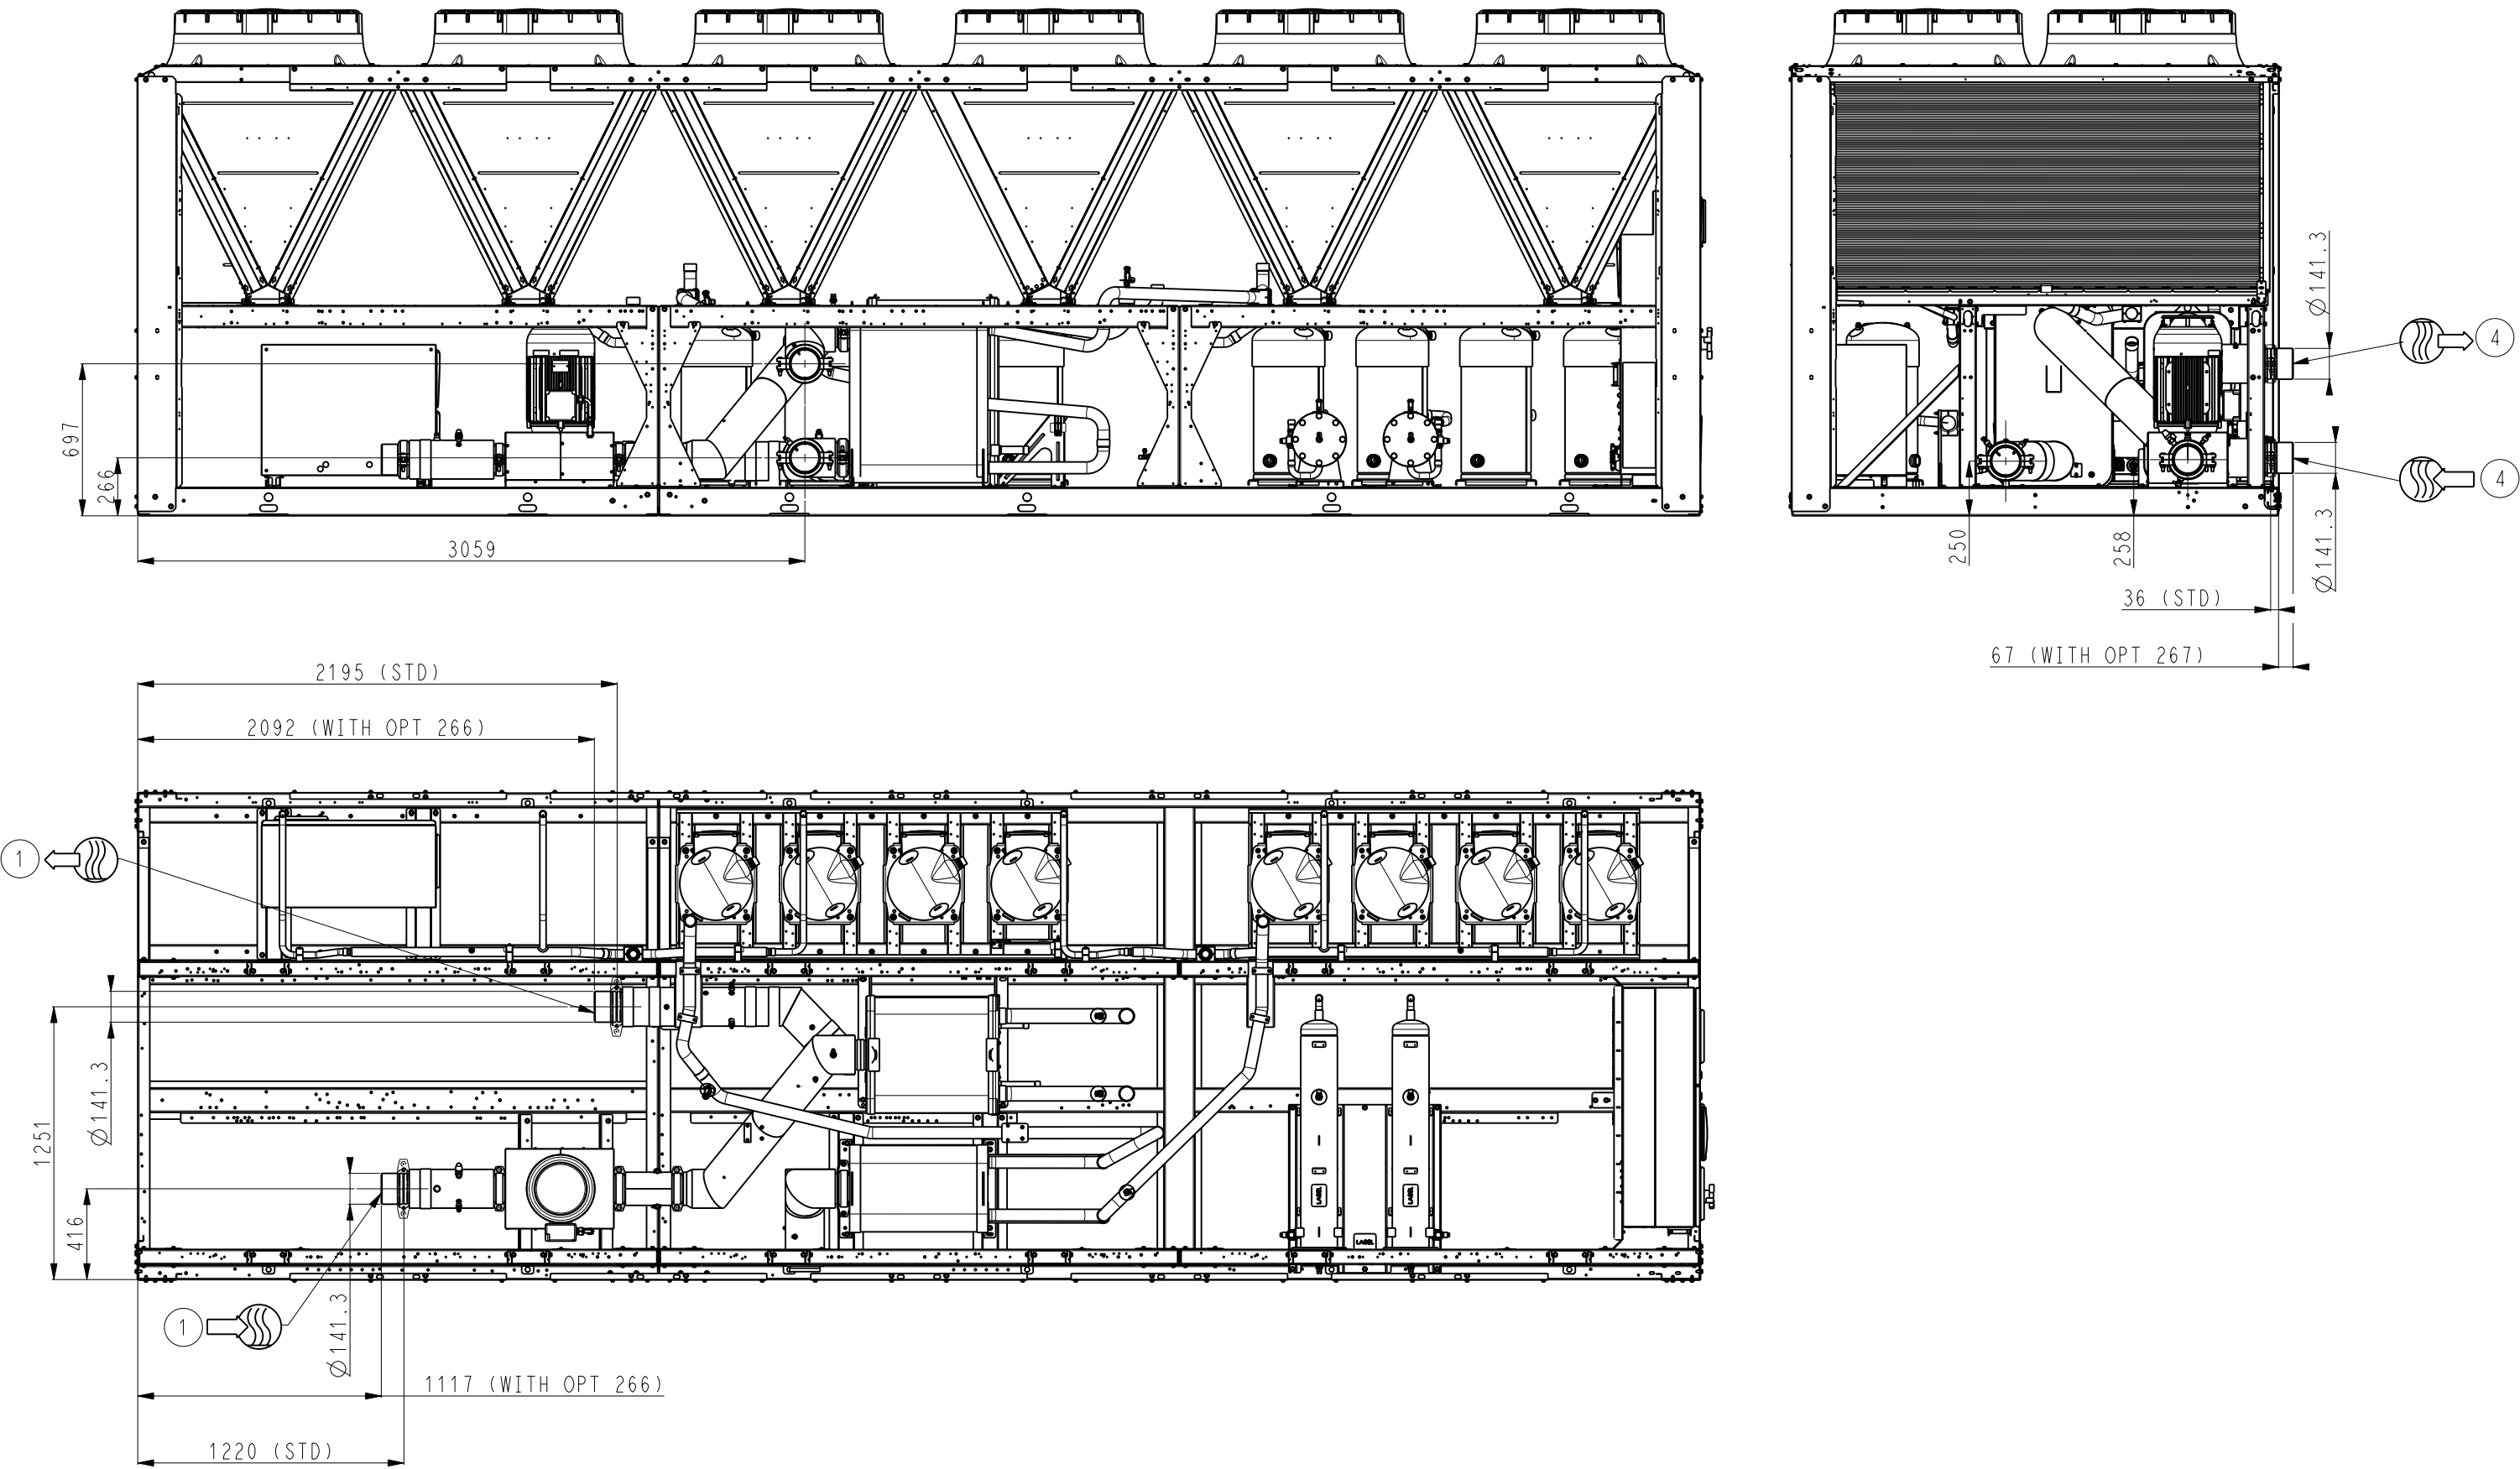

TOLERANCE	30RBP 770R -----> 950R		DATE	Feuille
±10	OPT 50 + 116V/W	00DCG000458000	24-Feb-23	Sheet
				5/7
				Indice
				B

OPT 266 / 267
OPT 116W

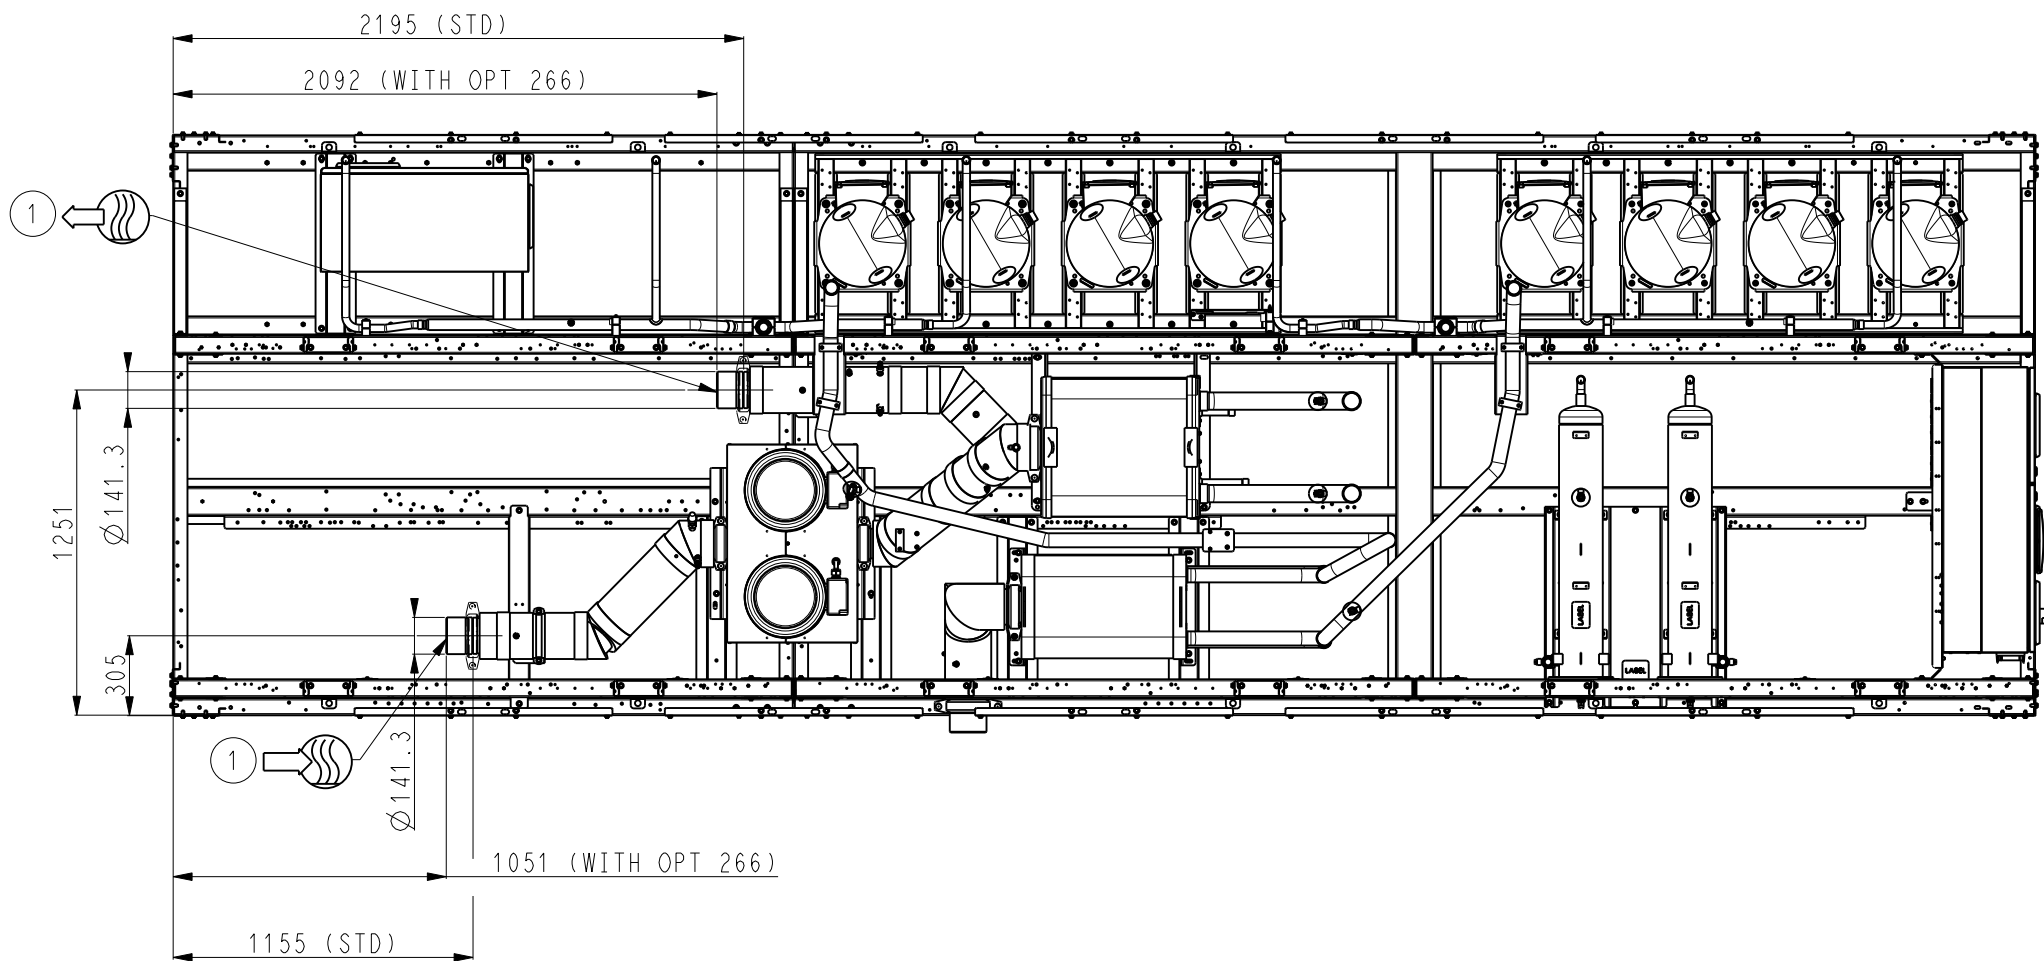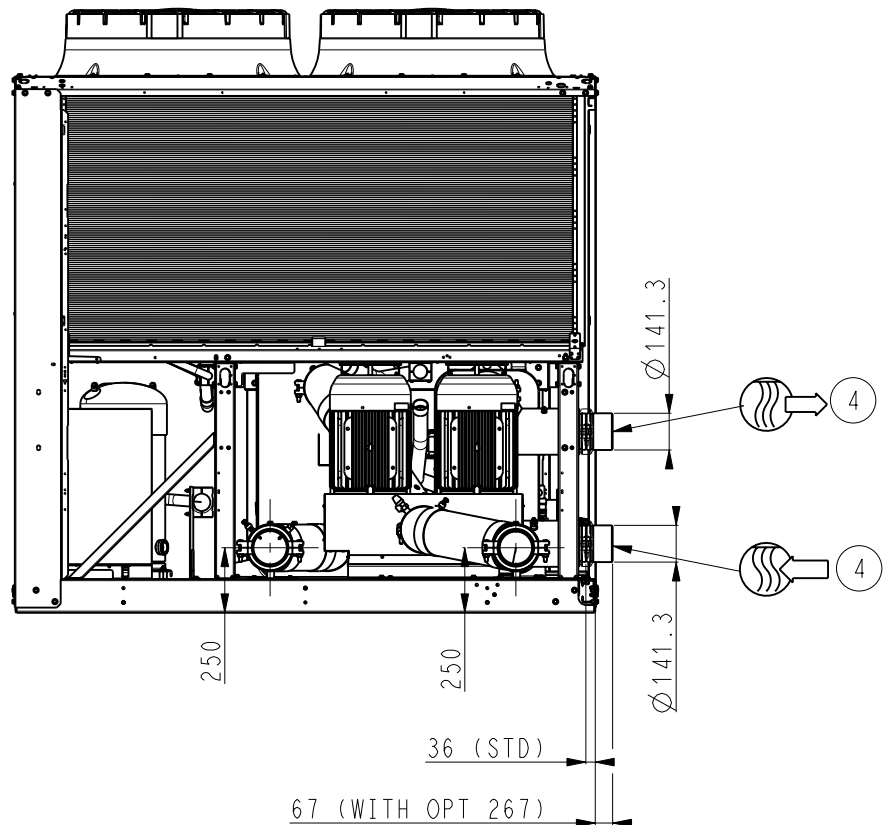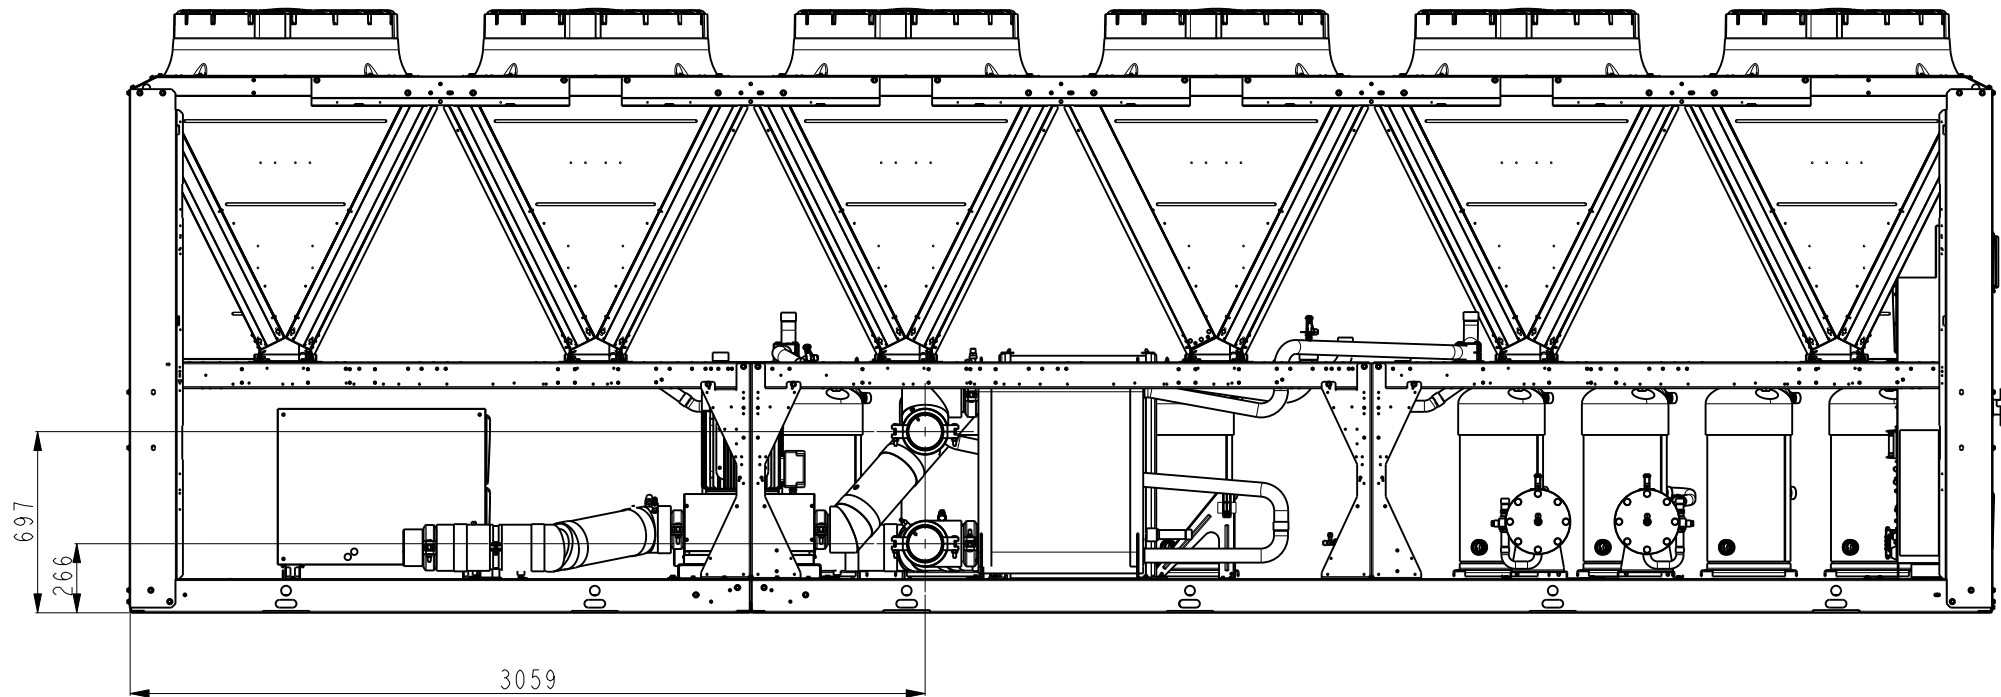

TOLERANCE ±10	30RBP 770R -----> 950R OPT 50 + 116V/W	 00DCG000458000	DATE 24-Feb-23	Feuille Sheet 6/7 Indice B

