


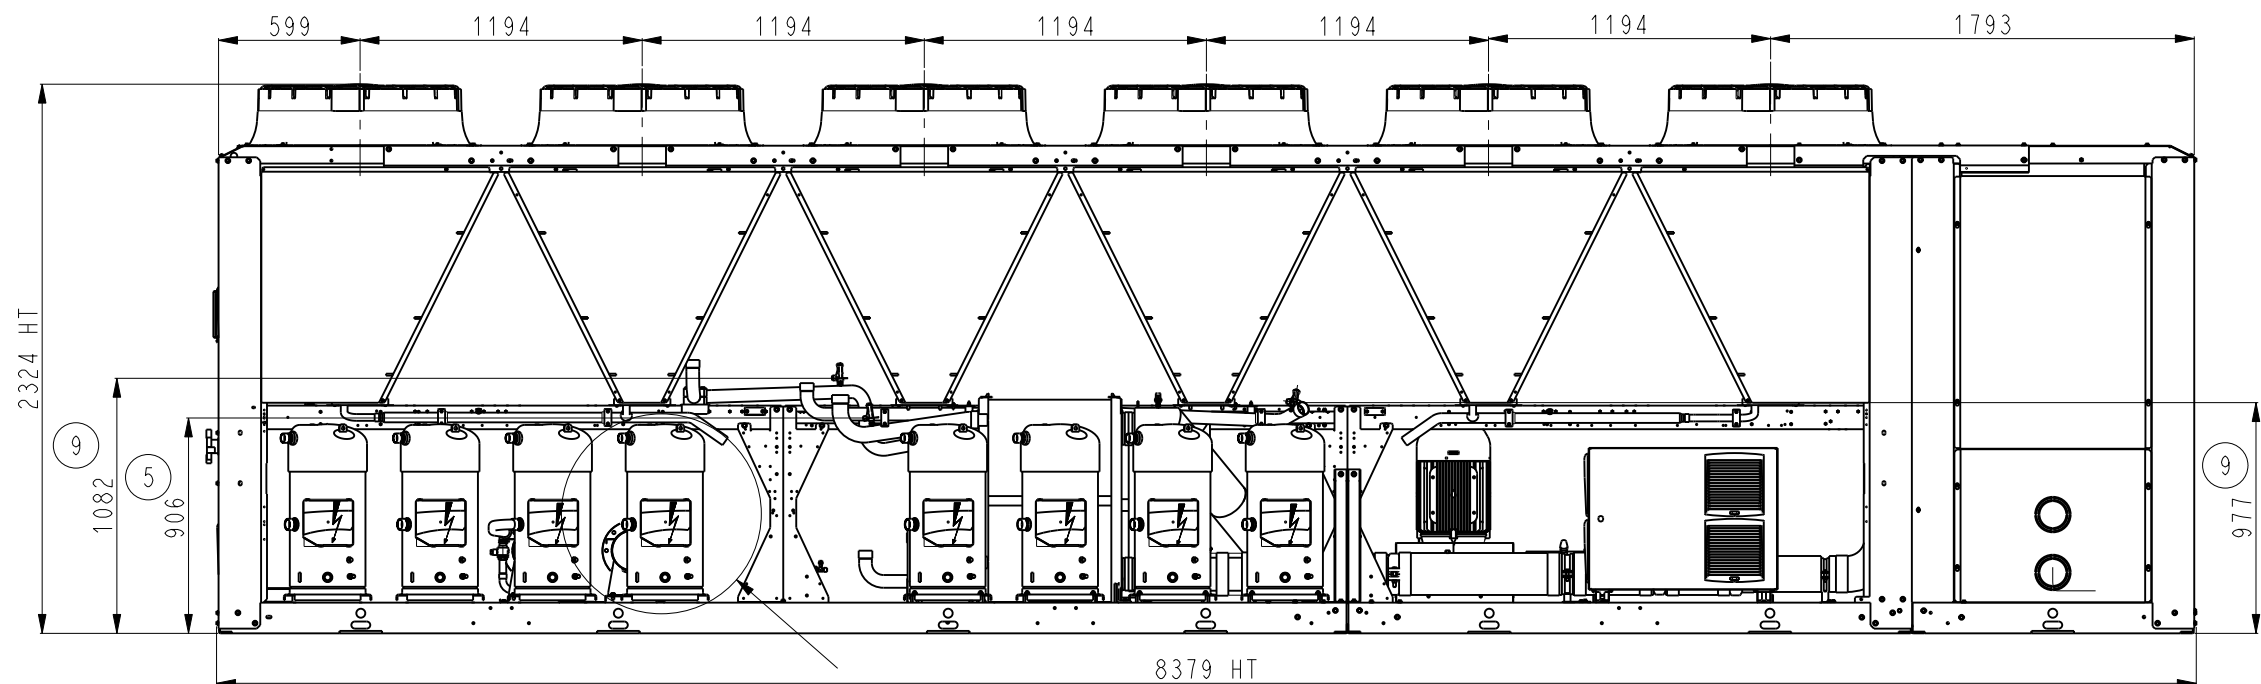


VOIR DETAIL
SEE DETAIL
FEUILLE/SHEET 4



VOIR DETAIL A
SEE DETAIL

8379 HT

8358

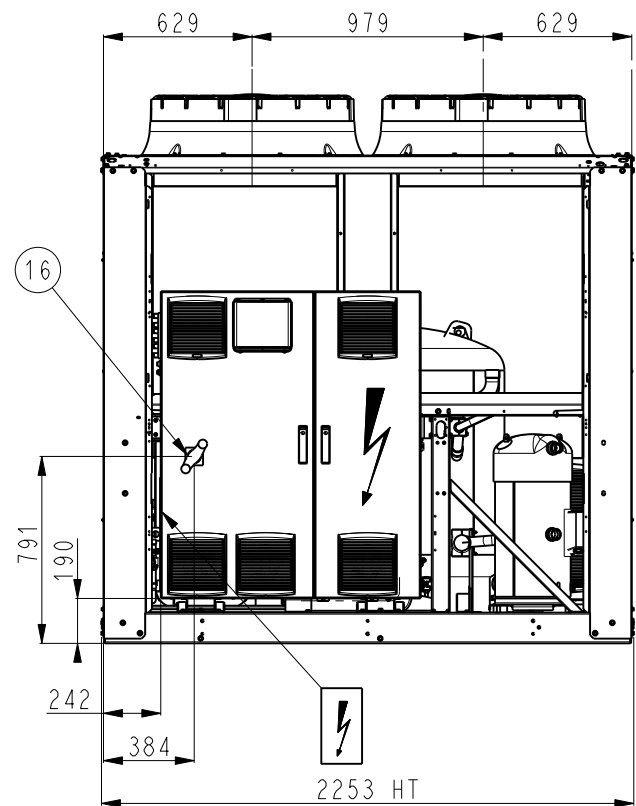


VOIR DETAIL B
SEE DETAIL
FEUILLE/SHEET 2

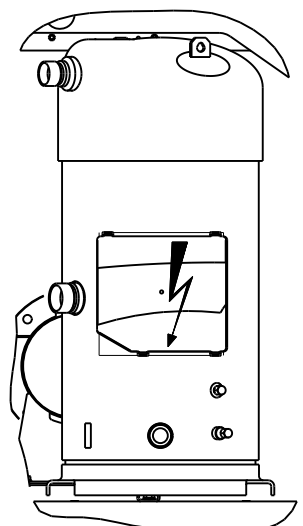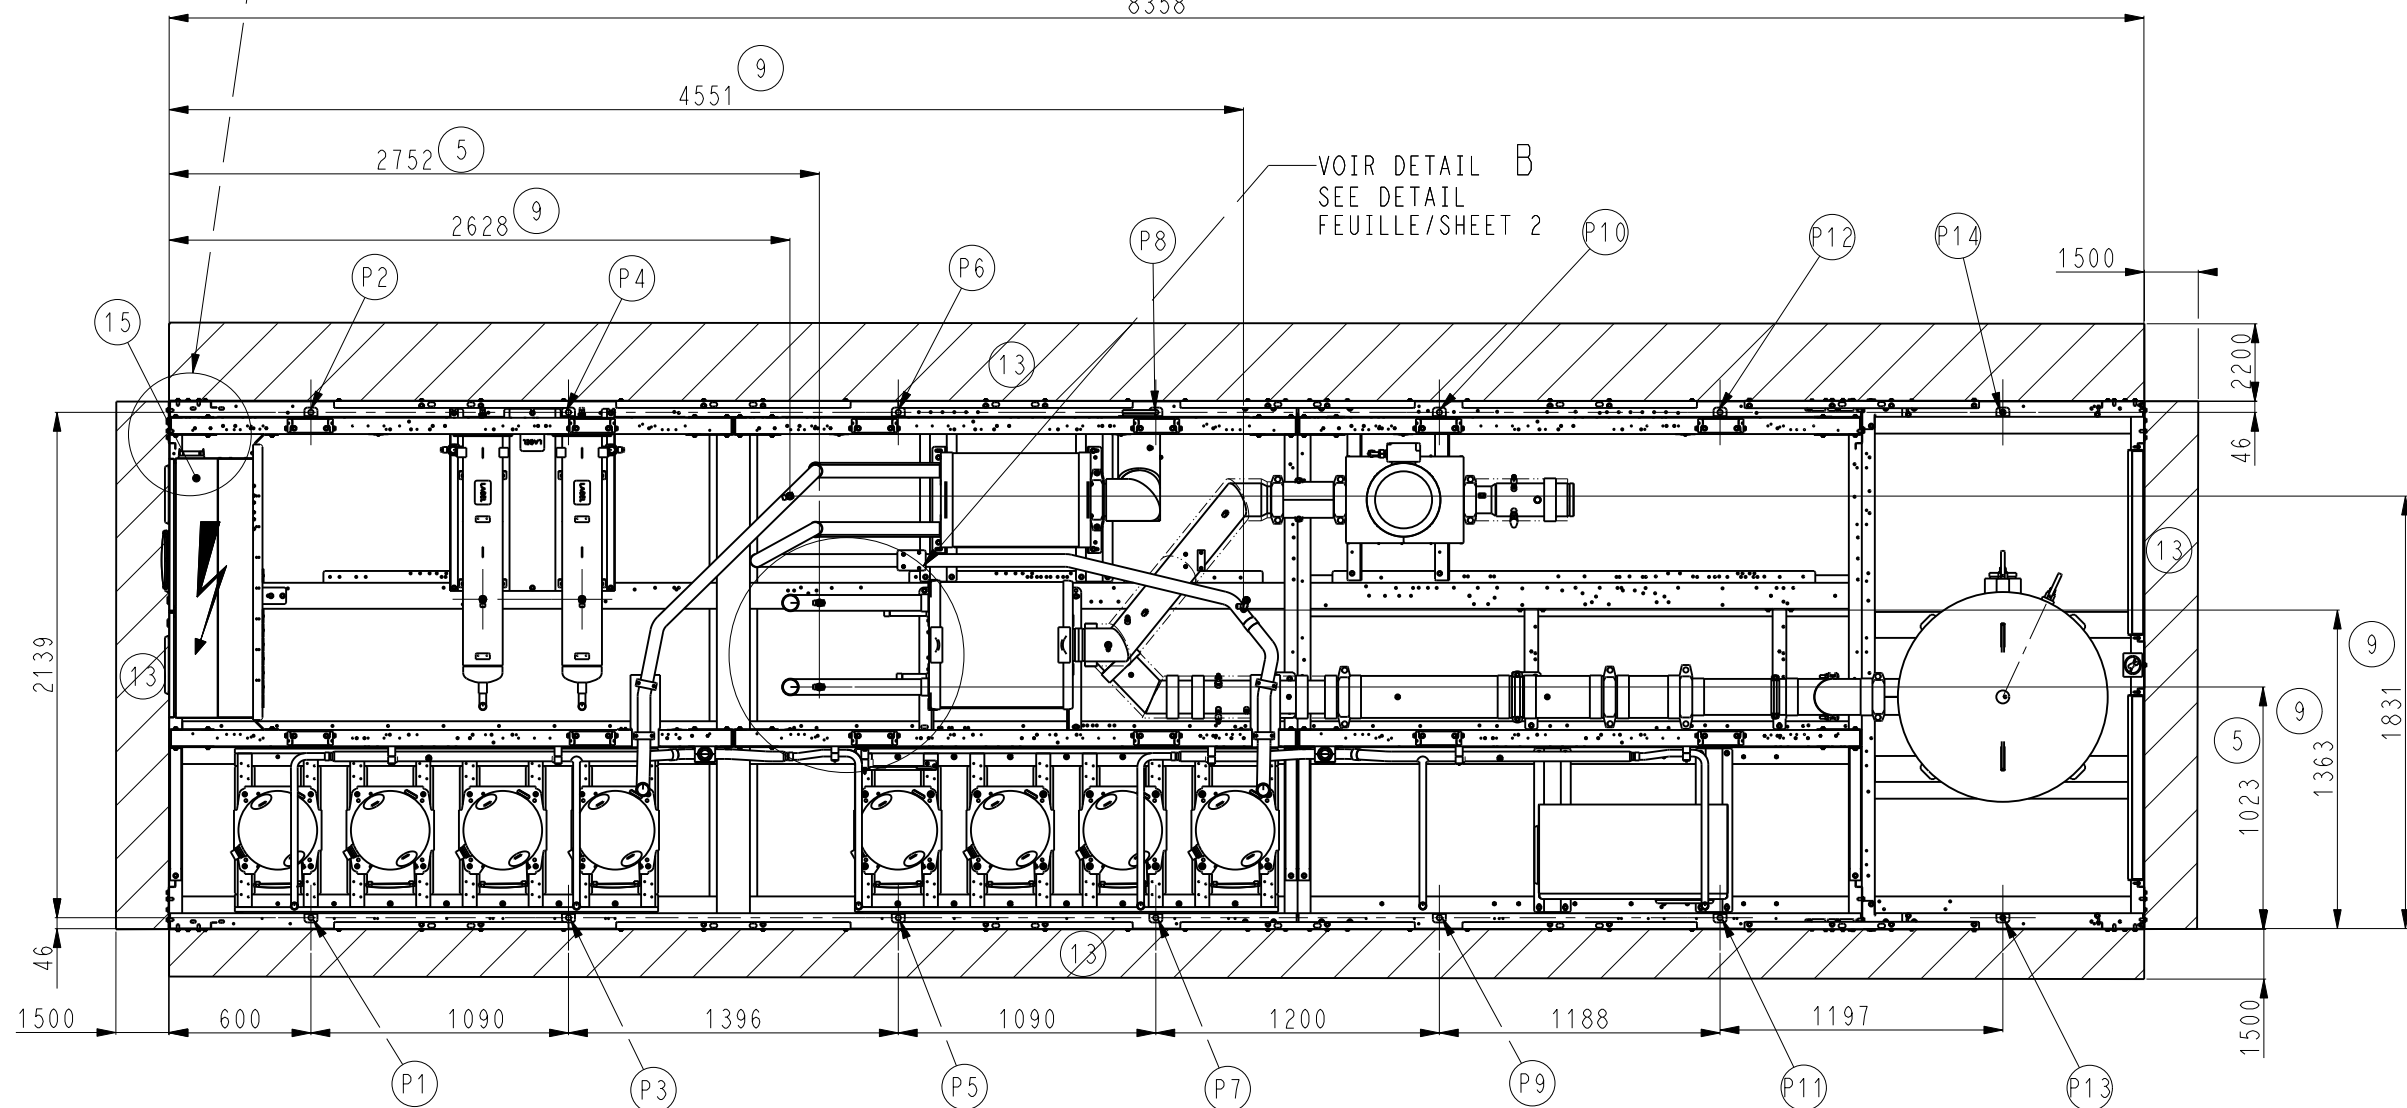

DETAIL A
ECHELLE 13:160



DETAIL SOUPAPE (5) & (9)

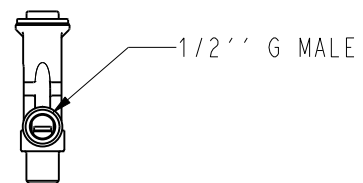

TOLERANCE	30RBP 770R -----> 950R
±10	OPT 50+307

Carrier	DATE 24-Feb-23	Feuille Sheet 1/7
00DCG000459600		Indice B

OPT 116V

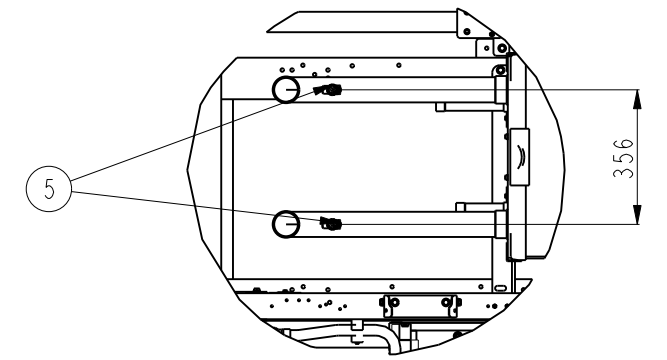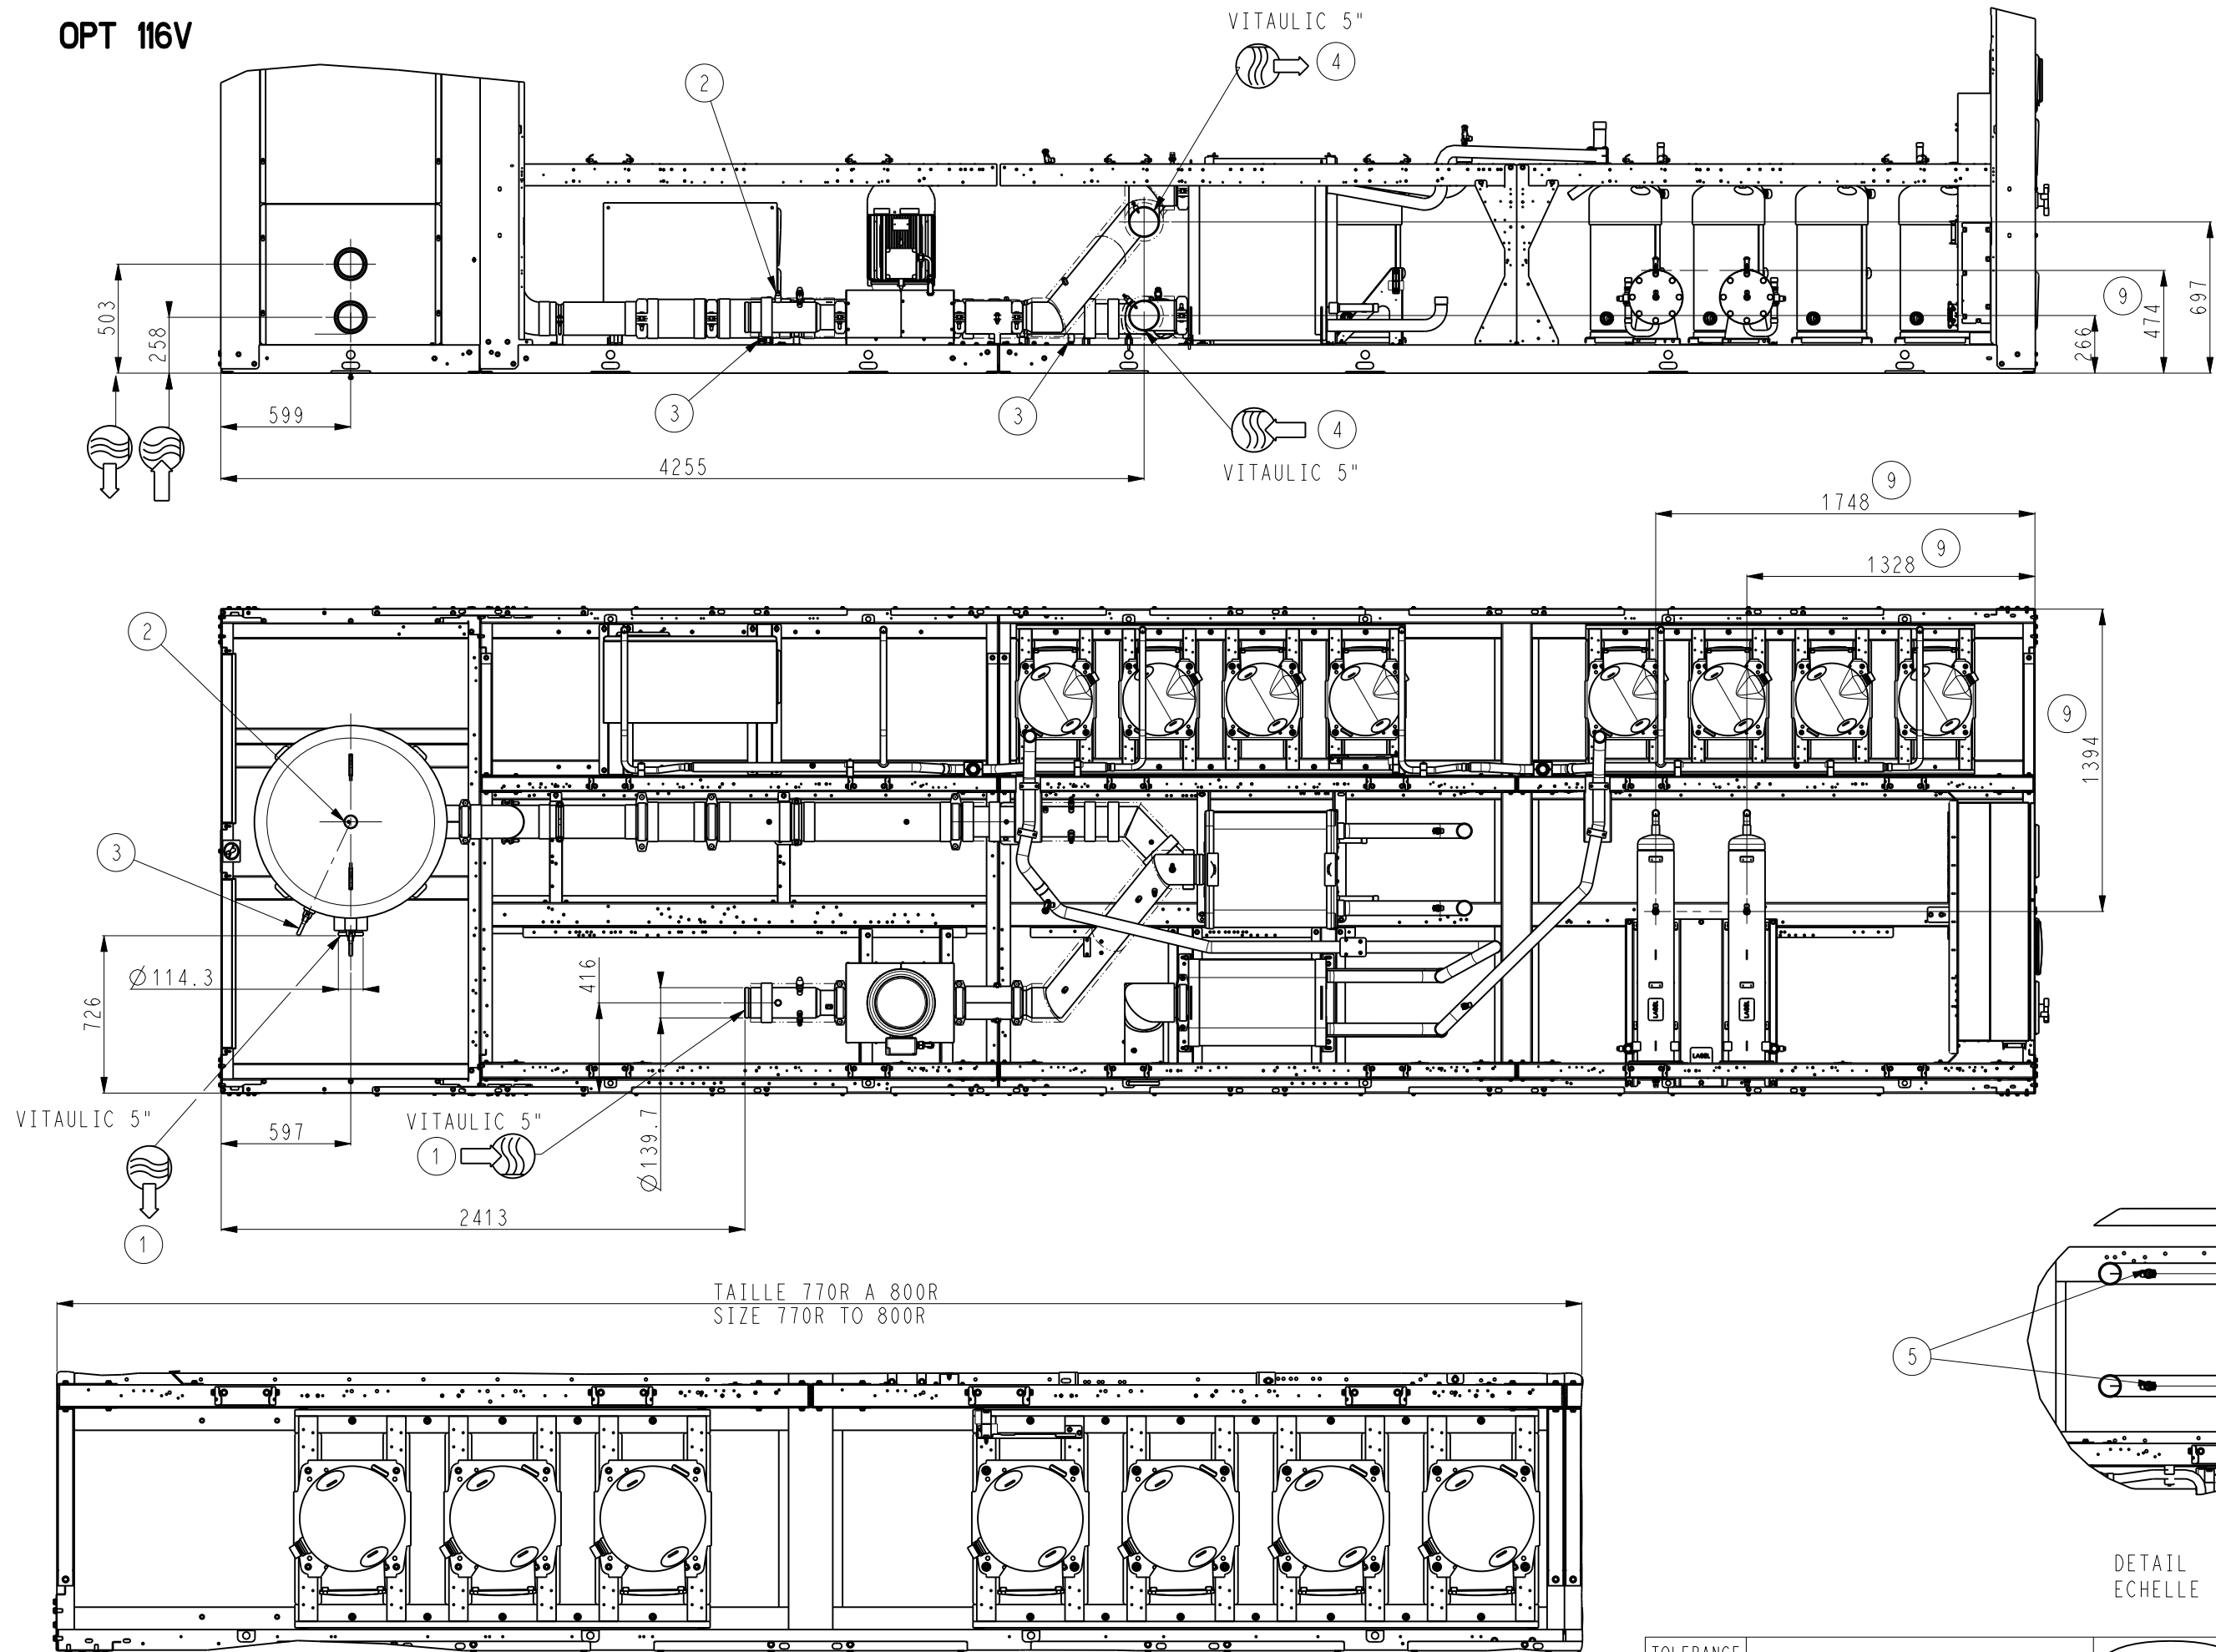


DETAIL B
ECHELLE 1:20


TOLERANCE	30RBP 770R -----> 950R	DATE	24-Feb-23	Feuille Sheet 2/7
±10	OPT 50+307			Indice
				B



00DCG000459600

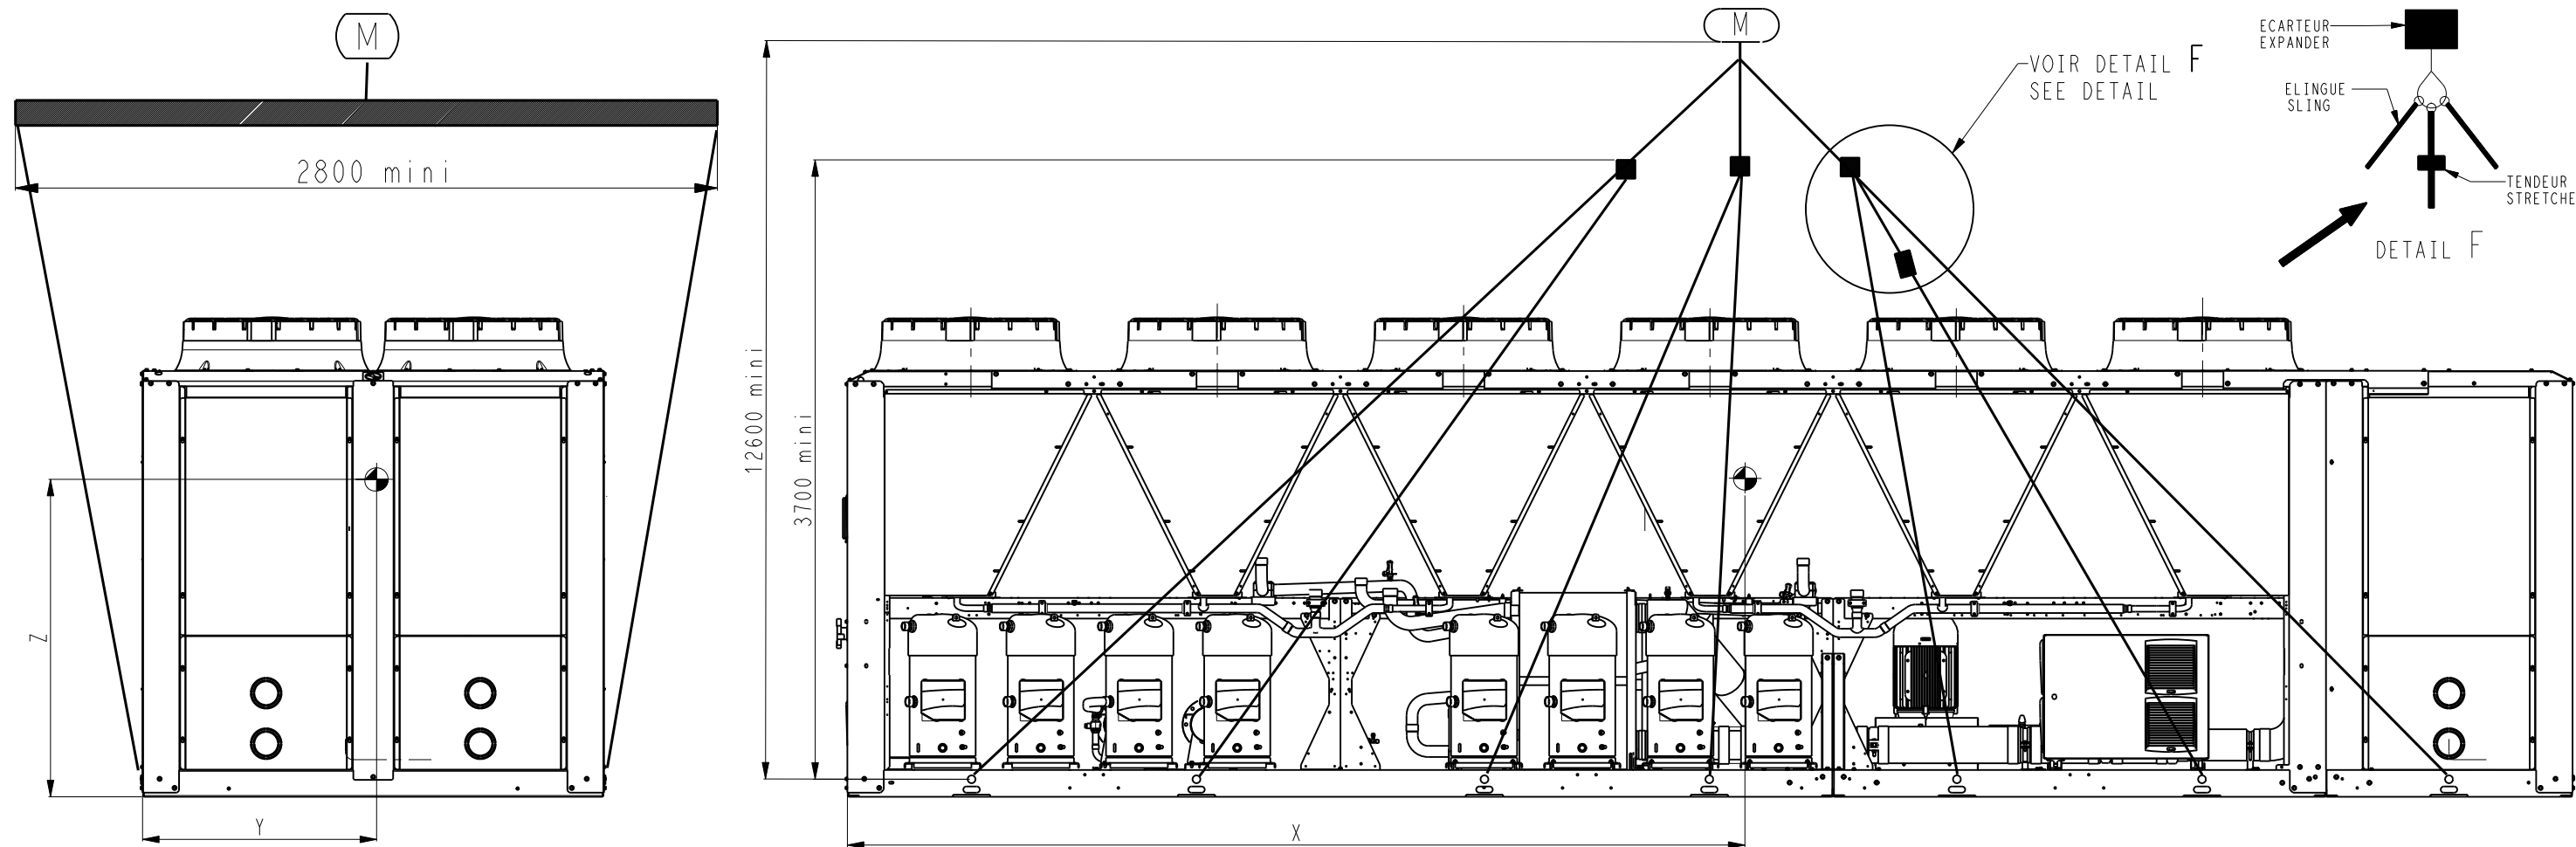


P1 a P14
P1 to P14

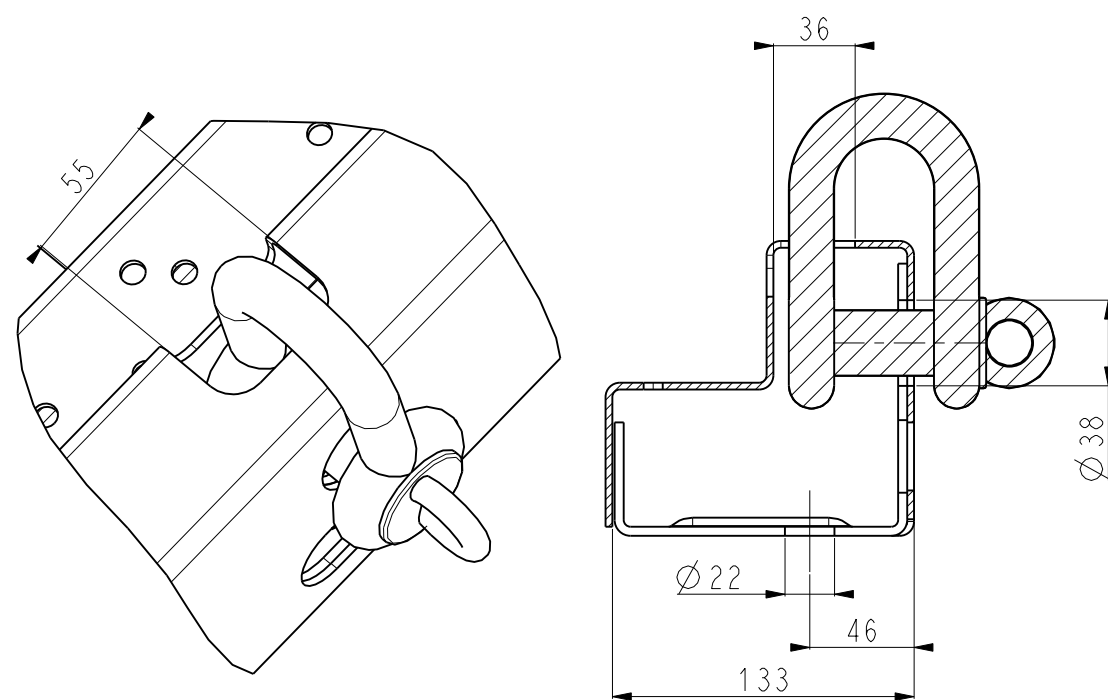

X (mm)	Y (mm)	Z (mm)
3688±95	996±20	843±15



STANDARD

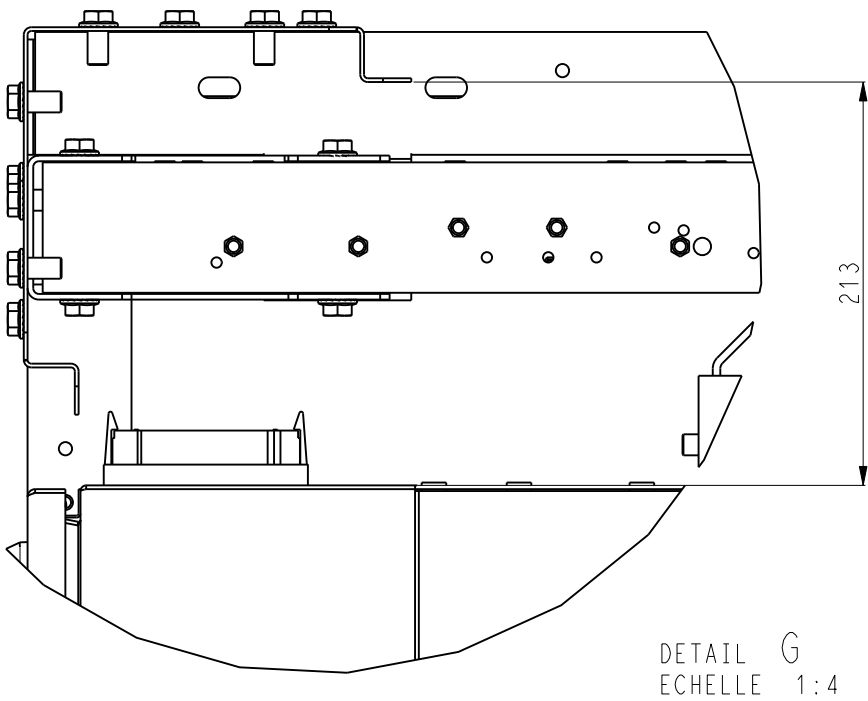




DETAIL G
ECHELLE 1:4

3 TROUS Ø11.0
HOLES

2x PE CLIENT FILETE M8
PE CUSTOMER THREADED M8


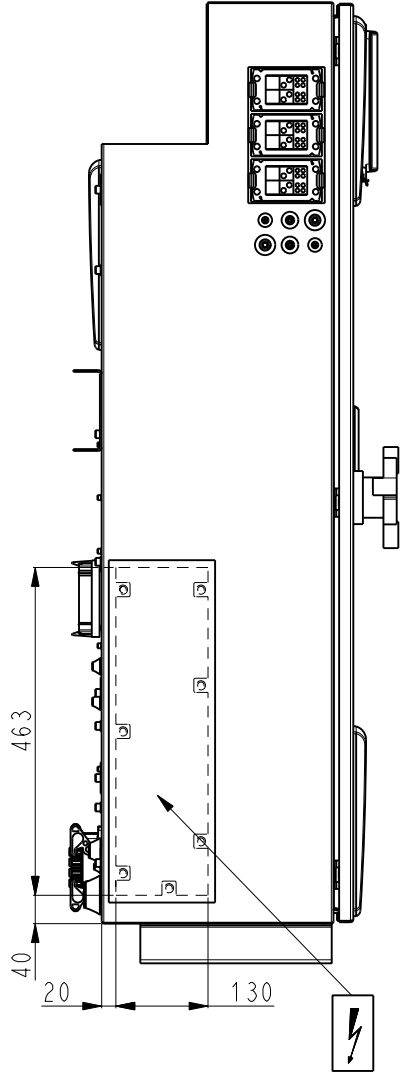
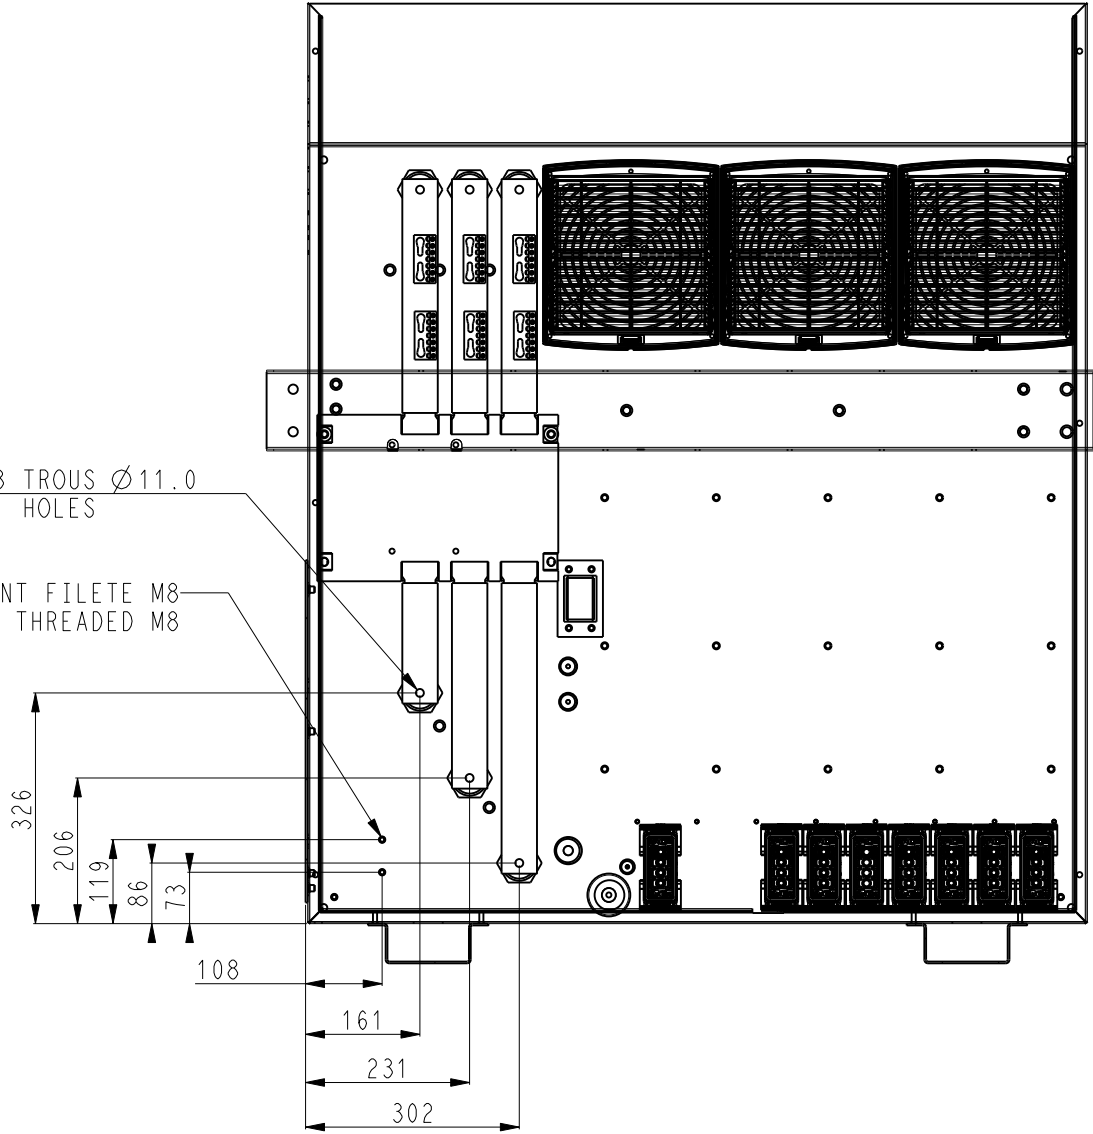


OPT 266 / 267
OPT 116V

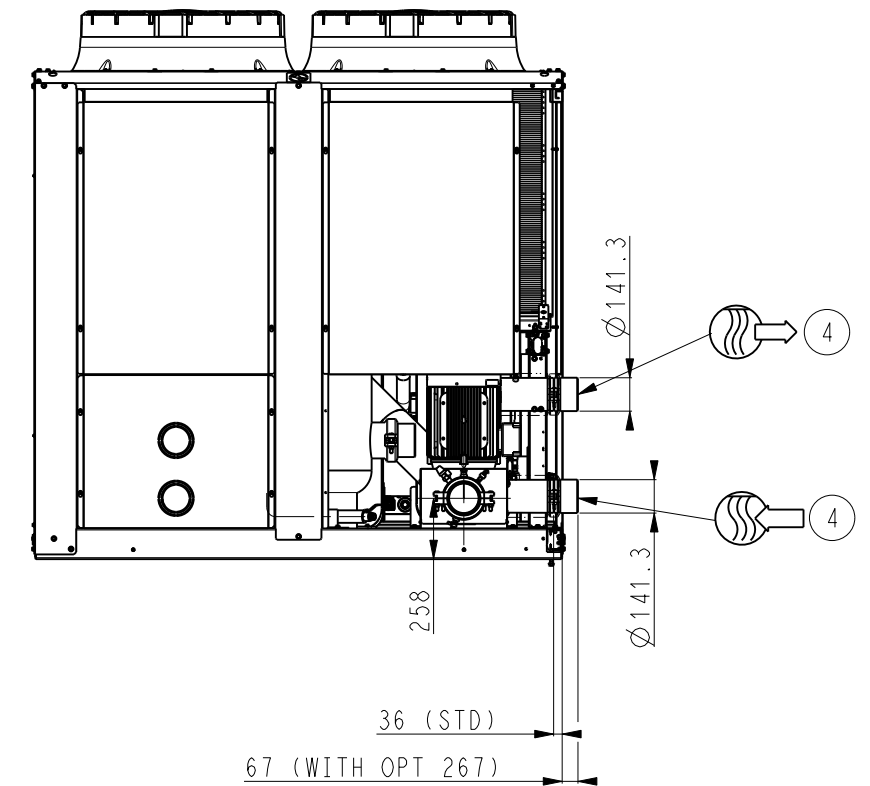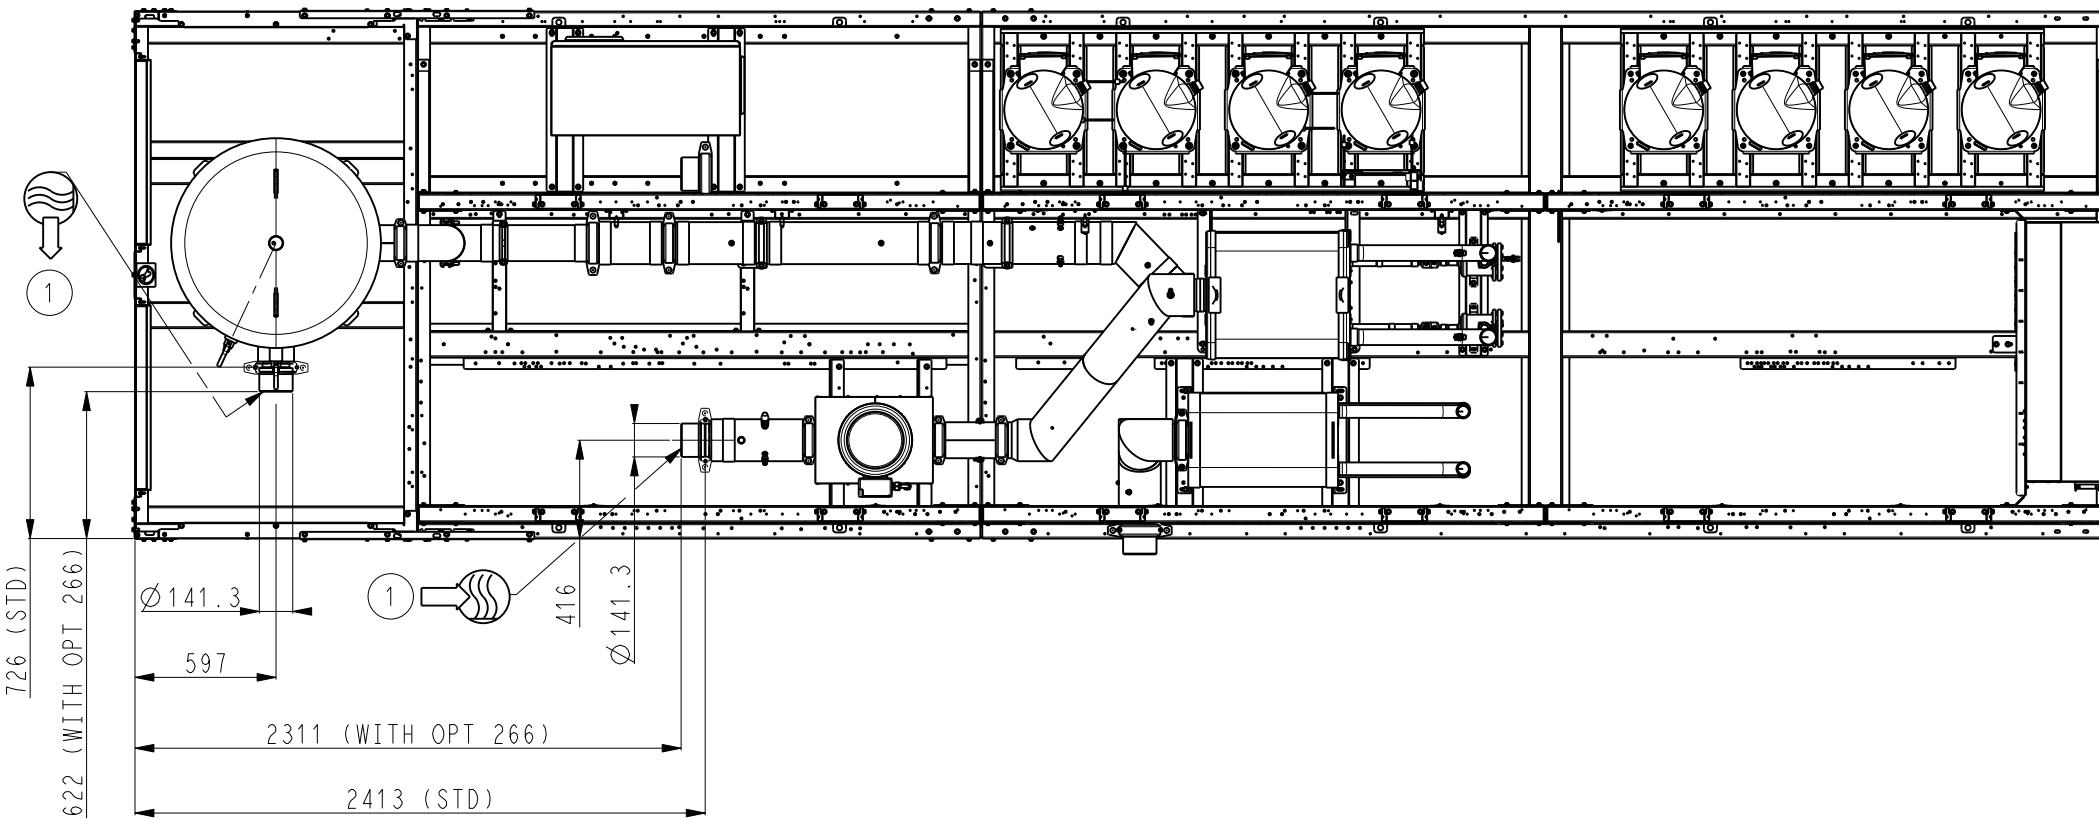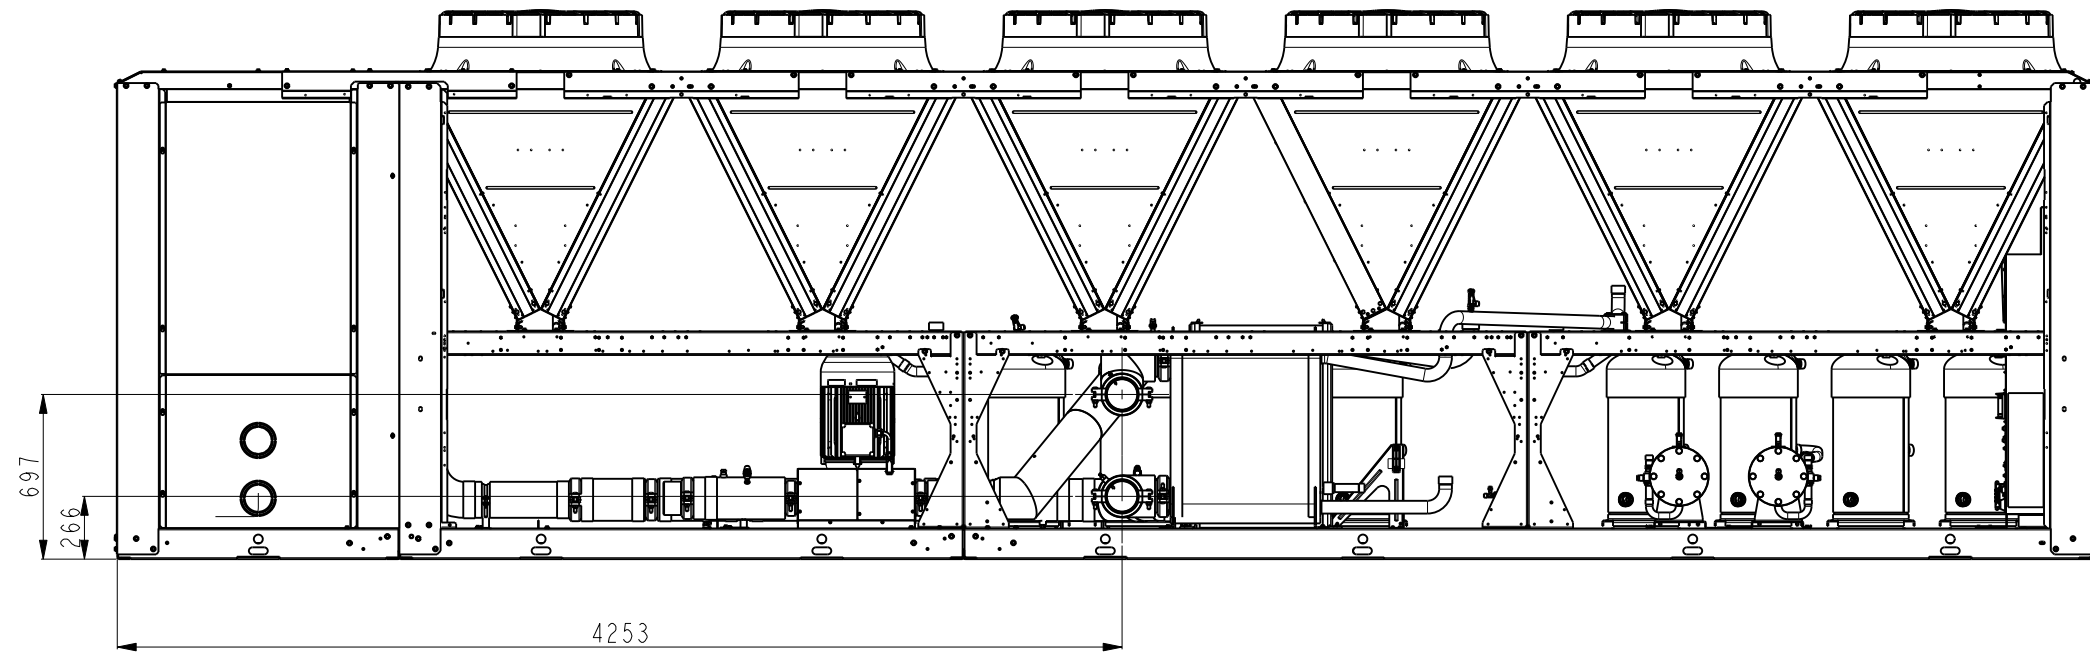

TOLERANCE ± 10	30RBP 770R -----> 950R OPT 50+307	 00DCG000459600	DATE 24-Feb-23	Feuille Sheet 5/7 Indice B

OPT 266 / 267
OPT 116W

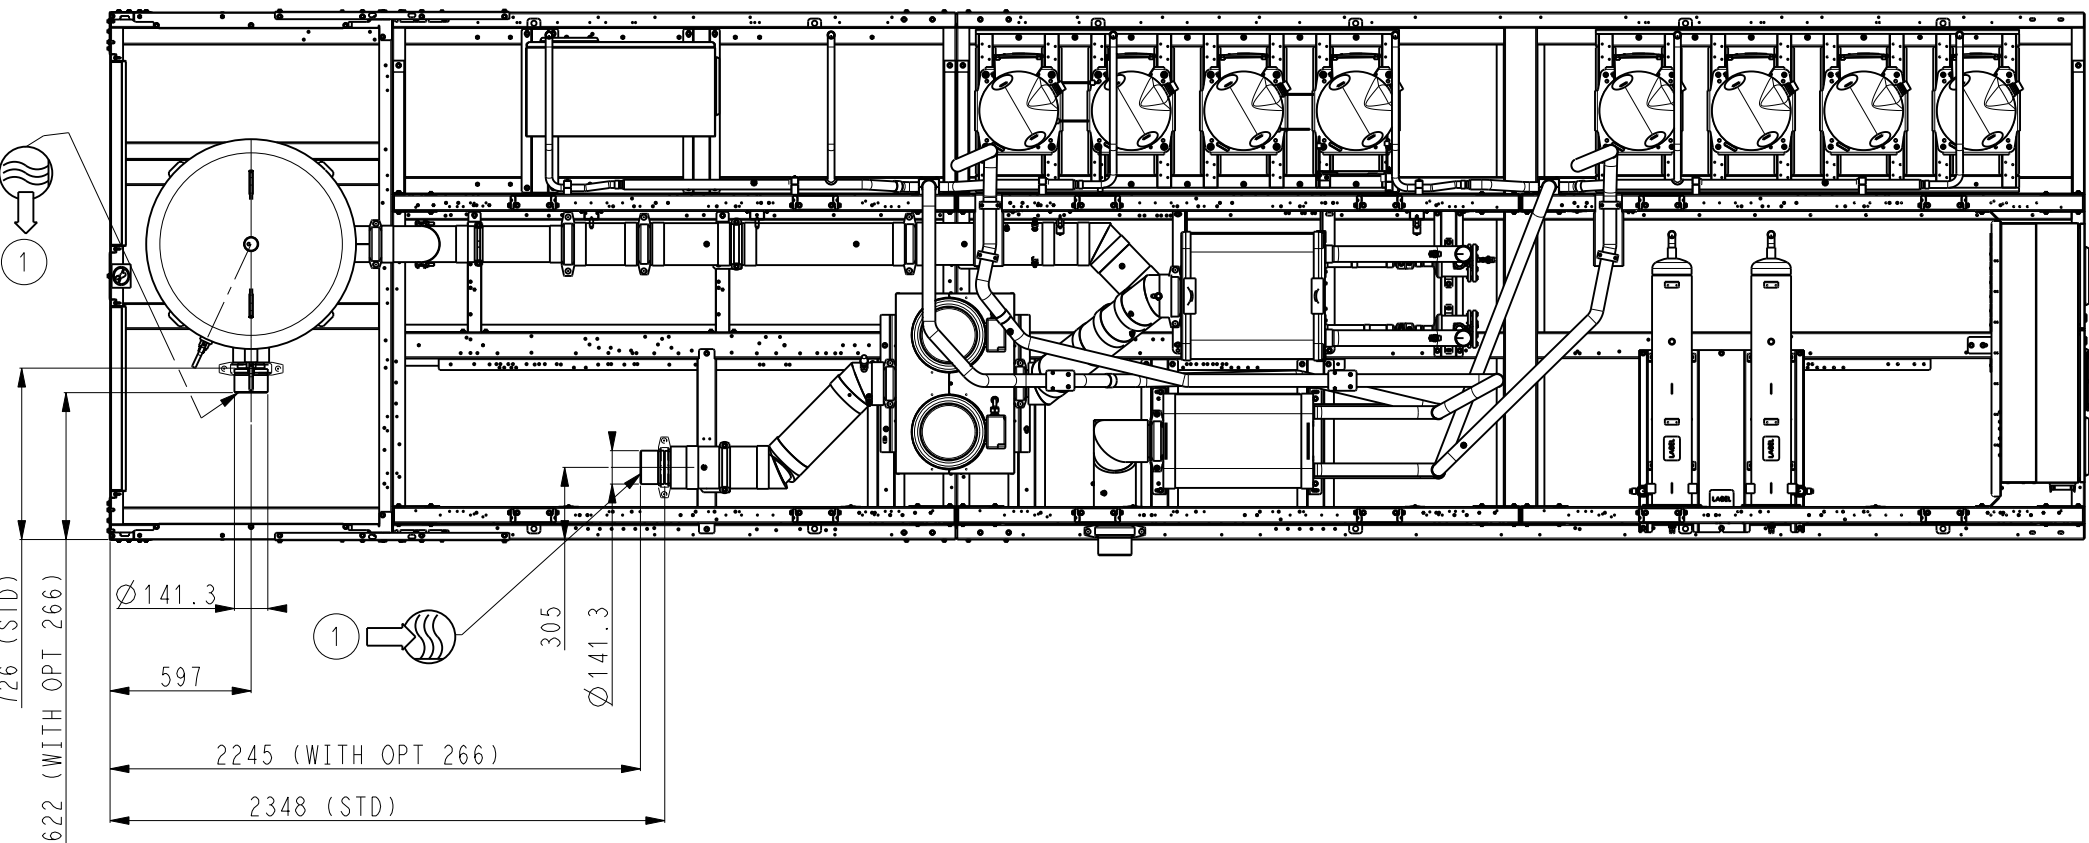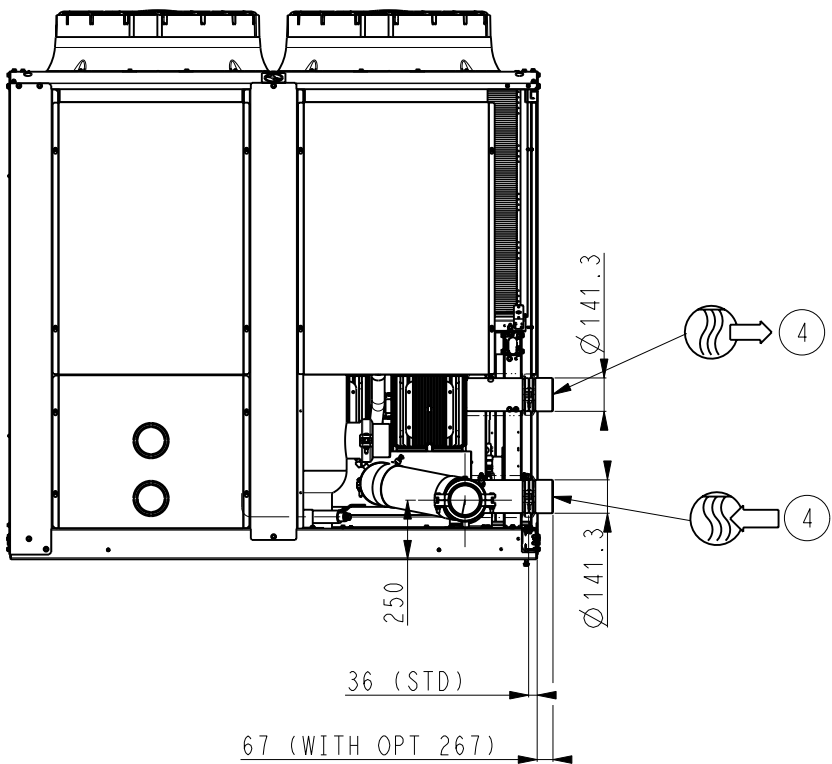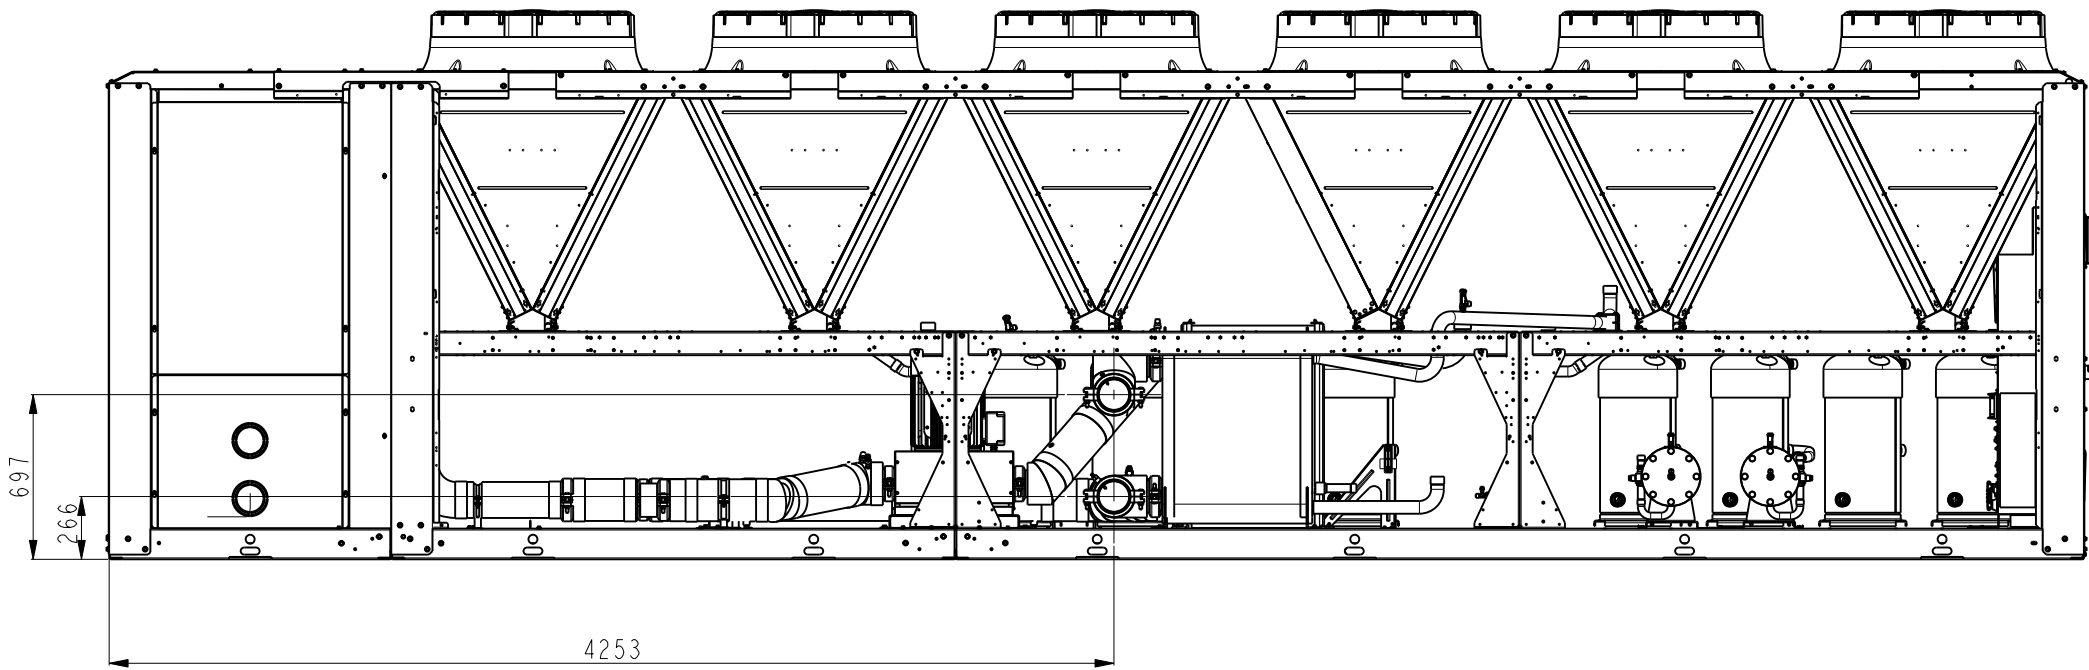

TOLERANCE ±10	30RBP 770R -----> 950R OPT 50+307	 00DCG000459600	DATE 24-Feb-23 Indice	Feuille Sheet 6/7 B

